BEAM	MIN. GAGE	TENSILE STRENGTH (LBS)	RAIL OR JOINT BEAM STRENGTH: TRAFFIC FACE UP LOAD (LBS)	TRAFFIC FACE UP MAXIMUM DEFLECTION (INCHES)	TRAFFIC FACE DOWN LOAD (LBS)	TRAFFIC FACE DOWN MAXIMUM DEFLECTION (INCHES)
STANDARD	12	80,000	1500 2000	2" 3"	1200 1600	2" 3"
HEAVY DUTY	10	100,000	2000 3000	2" 3"	1600 2400	2" 3"

STRENGTH - THE RAIL ELEMENT SHALL BE DESIGNED TO MEET THE REQUIREMENTS OF THE ABOVE TABLE. THE POST CONNECTION SHALL WITHSTAND A 5,000 POUND SIDE PULL IN EITHER DIRECTION. STANDARD STEEL BEAM TO BE 12 GAUGE AND THE HEAVY DUTY TO BE 10 GAUGE.

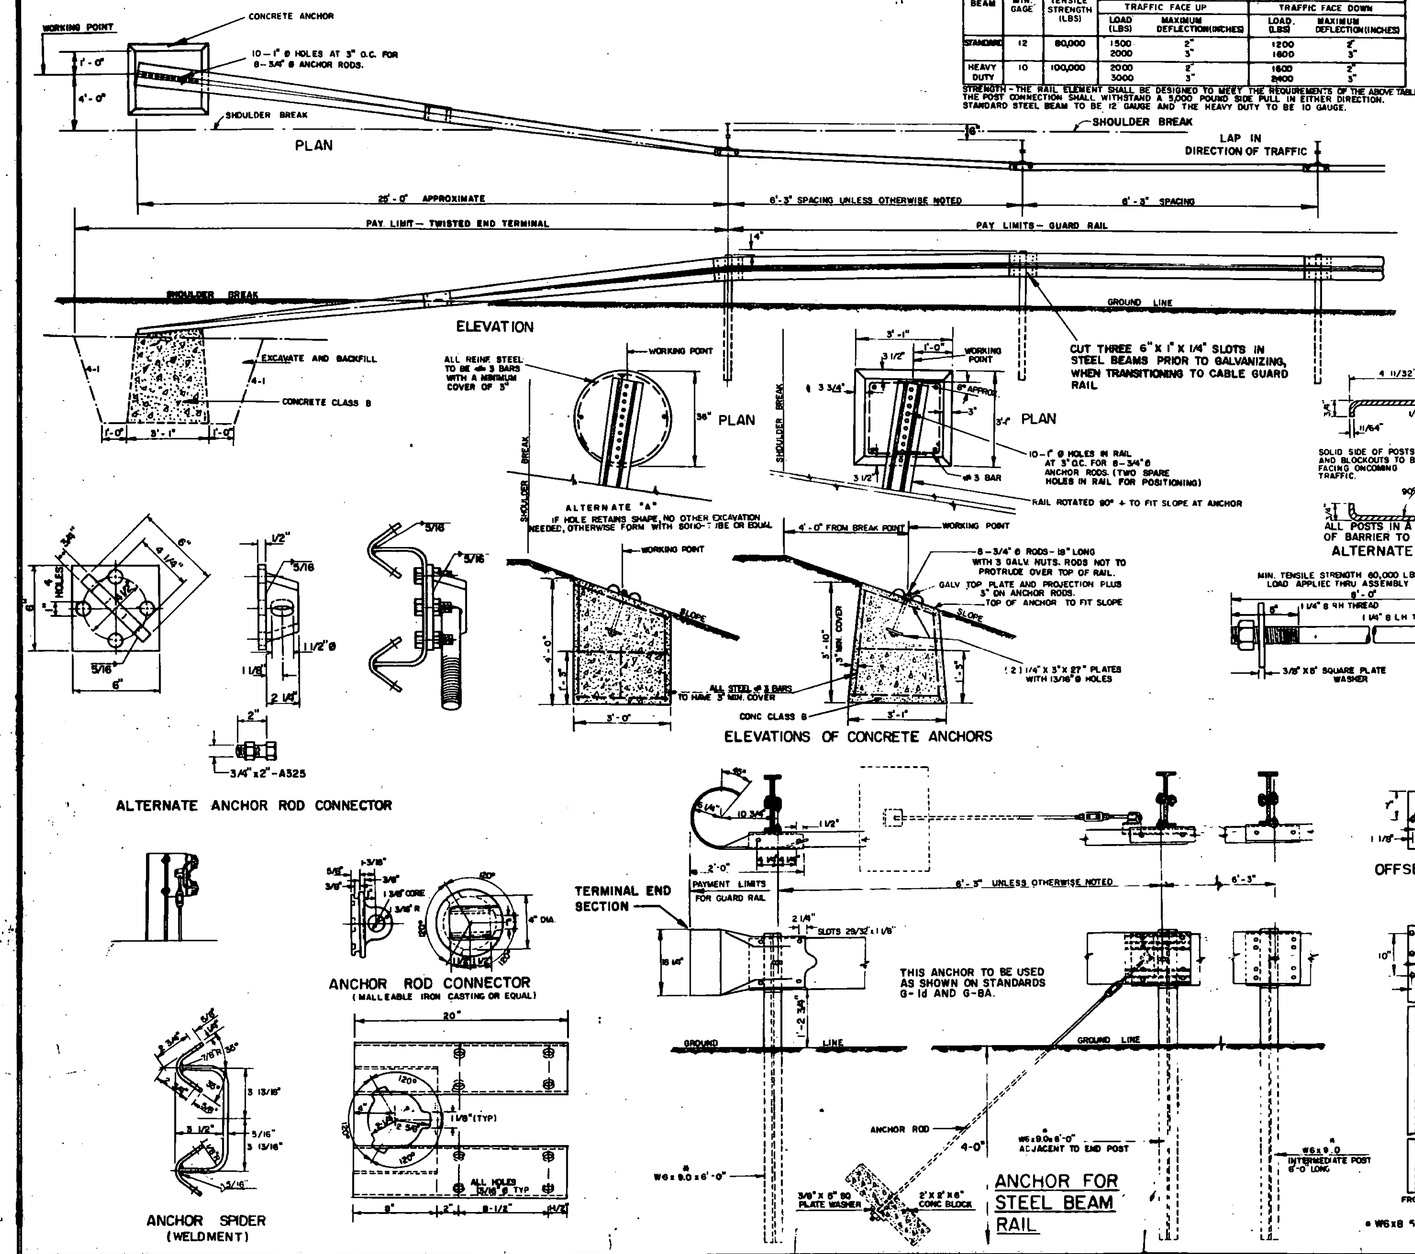

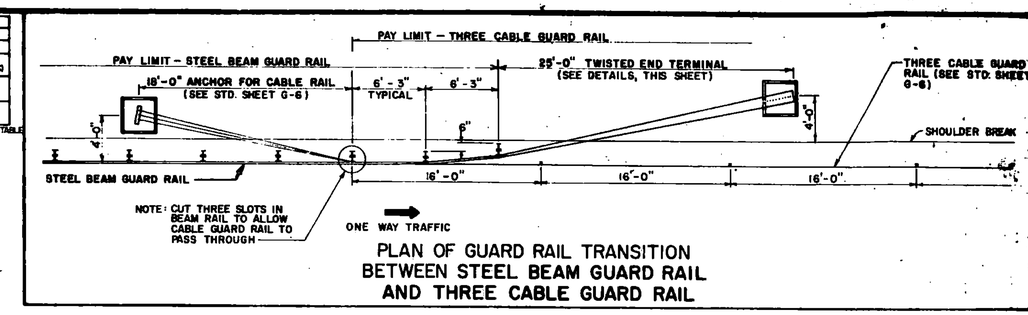

TWO FACES OF THIS PORTION OF WASHER TO BE REFLECTIVE MATERIAL.

DIRECTION OF TRAFFIC

REFLECTIVE MATERIAL SHALL MEET THE REQUIREMENTS OF SUBSECTION 750.09 AND SHALL BE OF ENCAPSULATED LENS SILVER OR AMBER.

THIS REFLECTORIZED ALUMINUM WASHER IS TO BE PLACED IN VALLEY OF BEAM WHEN MOUNTING BEAM ONTO EACH FIFTH POST. WASHER SHALL MEET SPECIFICATION REQUIREMENTS FOR ASTM B209 ALLOY 5052 - H32.

WITH 6"X8" WOOD POST

REVISIONS AND CORRECTIONS

APR. 10, 1972	POST HEIGHT INCREASED
JULY 9, 1973	NEW TRANSITION DETAIL ADDED
JUNE 4, 1974	TRANSITION REVISED, ALTERNATE ANCHOR ROD CONNECTOR AND ALTERNATE POST ADDED.
NOV. 29, 1977	ANCHOR DETAIL FOR STEEL BEAM GUARD RAIL WITH STEEL OR WOOD POSTS REMOVED.
JAN. 17, 1978	REVISED ANCHOR DETAIL.
JUNE 1, 1978	CHANNEL ANCHOR DETAILS CHANGED.
MAY 28, 1979	NOTE ON REFLECTIVE MATERIAL CHANGED
DEC. 16, 1980	INCREASED SHOULDER WIDENING FOR GUARD RAIL.
MAR 12, 1984	REVISED ANCHOR SPIDER DETAILS
JUNE 5, 1984	POST SIZE AND BACK UP PLATE NOTE CHANGED
DEC. 21, 1984	REMOVED POST WASHER
OCT. 31, 1985	REVISED TO CONFORM WITH 1986 SPECIFICATIONS

APPROVED: Dec. 8, 1971

R. H. Arnold
CHIEF ENGINEER

E. H. Ctickney
ASST. CHIEF ENGINEER

G. M. Lane
HIGHWAY ENGINEER

STEEL BEAM GUARD RAIL
HEAVY DUTY STEEL BEAM GUARD RAIL
TWISTED END TERMINAL
ANCHOR FOR STEEL BEAM RAIL

VERMONT AGENCY OF TRANSPORTATION

STANDARD

G-1