



**CLEARING AND GRUBBING,
INCLUDING INDIVIDUAL TREES AND STUMPS**

1+040.00 ~ 1+100.00
 1+081.4 LT (M) HICKORY
 1+087.4 RT (S) BOX ELDER
 1+089.3 RT (S) BOX ELDER
 1+097.3 RT S. ASH

COLD PLANING, BITUMINOUS PAVEMENT

1+040.00 ~ 1+060.00

STONE FILL, TYPE I

1+040.0 LT. ~ 1+100.00 RT.
 1+040.0 RT. ~ 1+080.0 RT.

REMOVAL OF EXISTING FENCE


1+040.0 RT ~ 1+100.0 RT

MANUFACTURED TERMINAL SECTION, FLARED

1+090.40 RT. ~ 1+100.00 RT.
 1+090.40 LT. ~ 1+100.00 LT.

REMOVAL AND DISPOSAL OF GUARDRAIL

1+063.6 LT. ~ 1+100.0 LT.
 1+064.0 RT. ~ 1+100.0 RT.

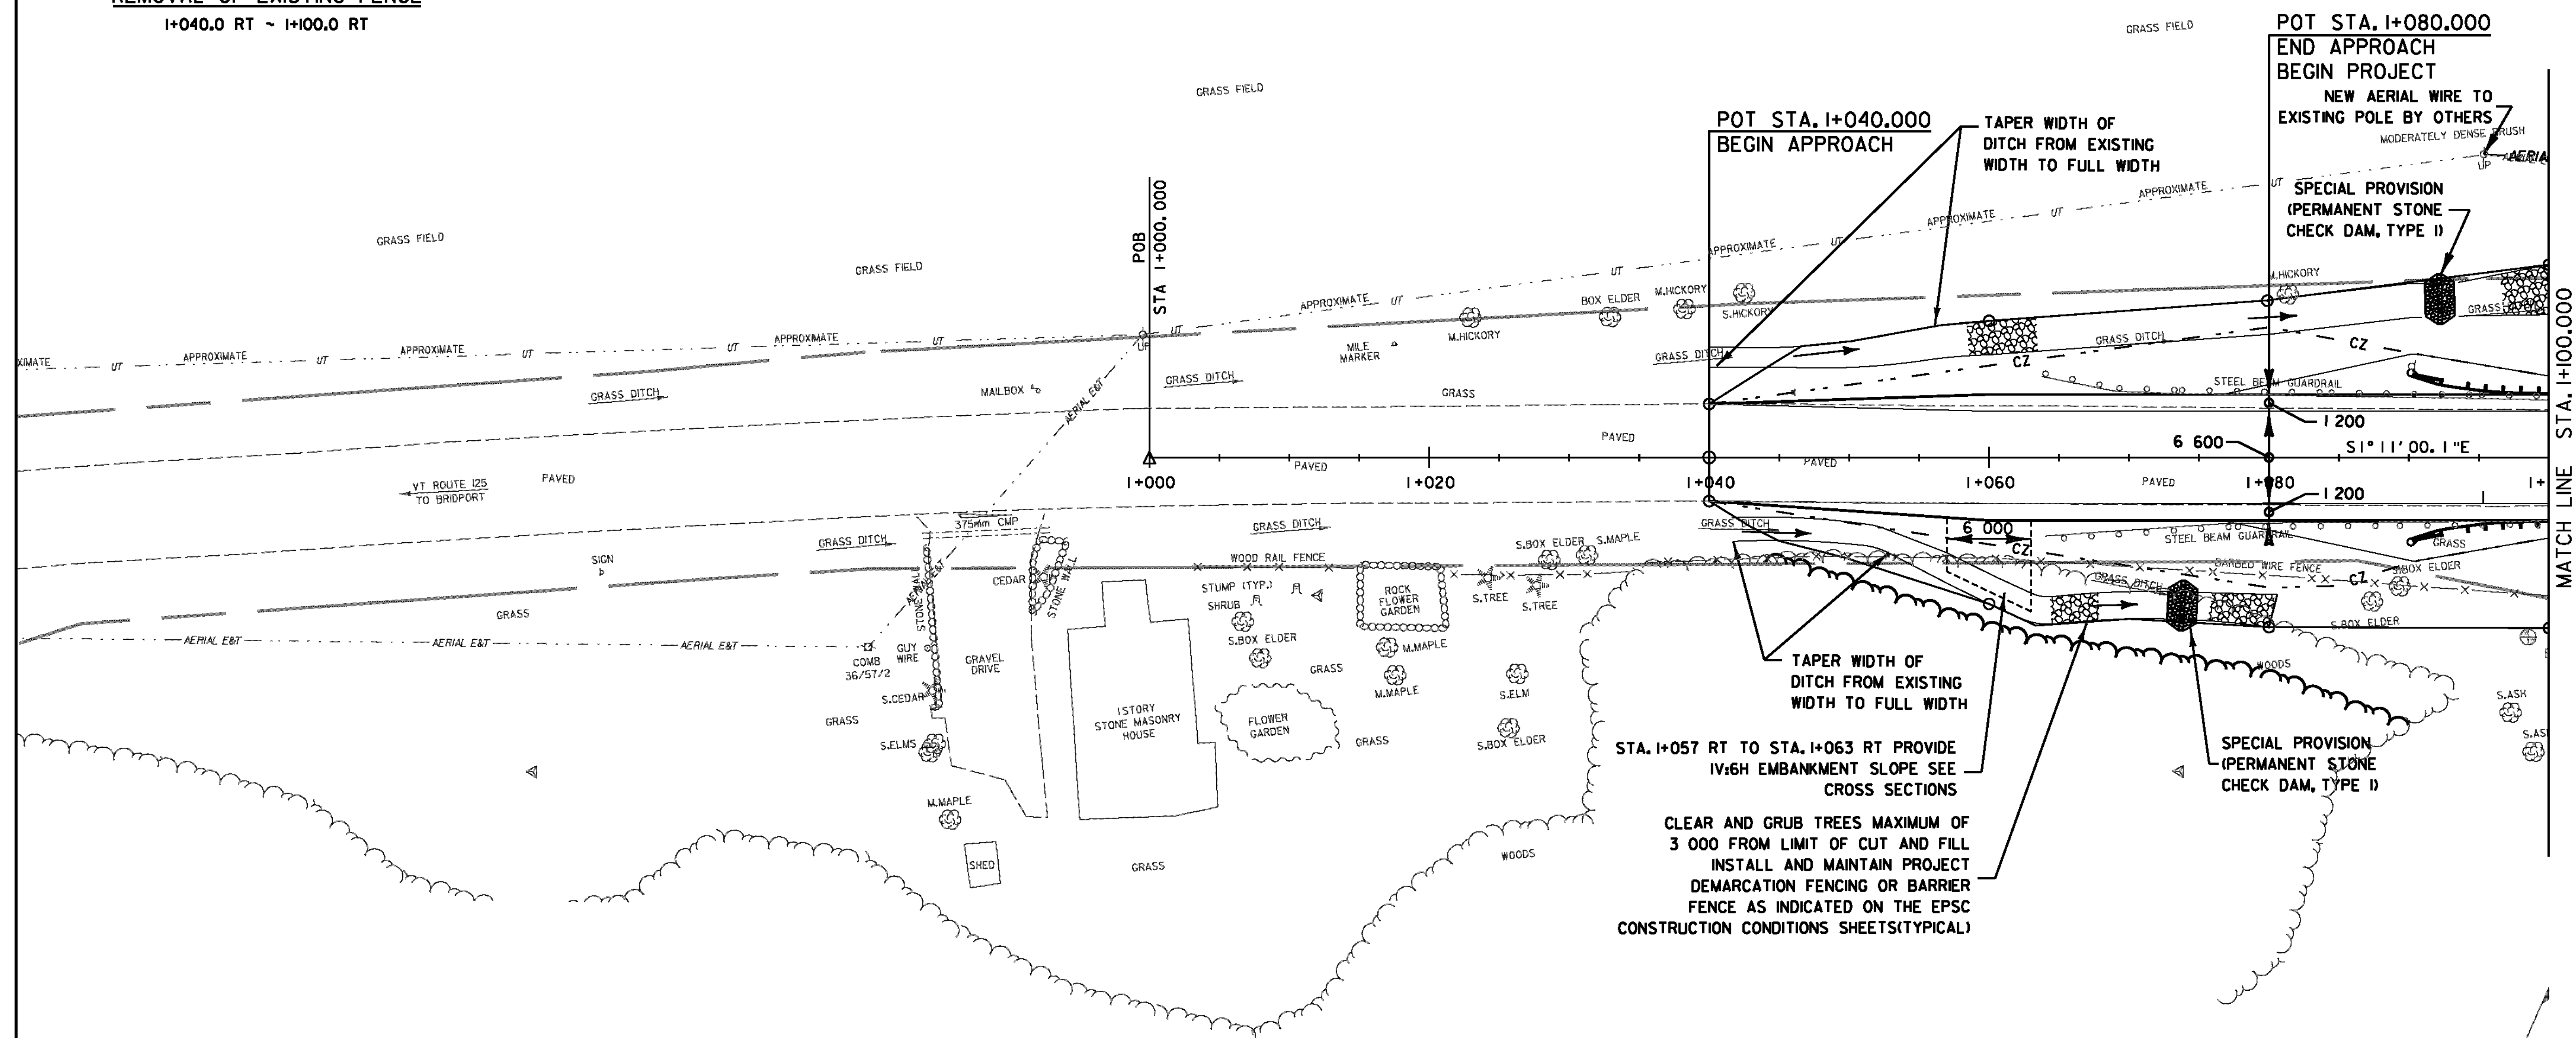

DATUM

VERTICAL	NAVD 88
HORIZONTAL	NAD 83(92)



LEGEND

	STONE LINED DITCH
	EROSION MATTING LINED DITCH

PROJECT: CORNWALL	PROJECT NO.: BRS 0172(6)
DESIGN FILE NAME: z85e042bdr.dgn	PLOT DATE: 2/4/2010
IPARM FILE NAME:	SURVEY DATE: 1996&1999
SURVEYED BY: VTRANS & VT SURVEY	DRAWN BY: ERIK ATKINS
SQUAD LEADER: MARTHA EVANS-MONGEON	SHEET: 22 OF 144
ROADWAY LAYOUT SHEET 1	