TRAFFIC ITEM AND TRAFFIC SIGN SUMMARY SHEET, NOTES AND DETAILS

MILEMARKER, STATION, OR SIGN NUMBER	SIGN LEGEND	SIGN DIMENSIONS	EXISTING SIGNS: TO BE SALVAGED: REMOVE (EA.)	EXISTING SIGNS: TO BE SALVAGED: RETAIN (X)	NEW AND SALVAGED SIGNS: NEW "A" (S.F.)	NEW AND SALVAGED SIGNS: NEW "B" (S.F.)	NEW AND SALVAGED SIGNS: SALV. SIGN (EA.)	NEW AND SALVAGED SIGNS: SALV. T.I.S. (S.F.)	EXISTING POSTS: RET.	EXISTING POSTS: DRILL	EXISTING POSTS: REM.	EXISTING POSTS: SALV.	NEW SIGN POSTS: NUMBER OF POSTS	NEW SIGN POSTS: FLANGED CHANNEL: 2.0 LB./FT.	NEW SIGN POSTS: FLANGED CHANNEL: 2.5 LB./FT.	NEW SIGN POSTS: FLANGED CHANNEL: 3.0 LB./FT.	NEW SIGN POSTS: TUBULAR ALUMINUM: 3.0" Ø	NEW SIGN POSTS: TUBULAR ALUMINUM: 3.0" □	NEW SIGN POSTS: TUBULAR ALUMINUM: 4.0" Ø	NEW SIGN POSTS: TUBULAR ALUMINUM: 4.0" Ø MOD.	NEW SIGN POSTS: W SHAPED STEEL: POST SIZE	NEW SIGN POSTS: W SHAPED STEEL: WEIGHT	NEW SIGN POSTS: W SHAPED STEEL: FTG. SIZE 24"	NEW SIGN POSTS: W SHAPED STEEL: FTG. SIZE 30"	REMARKS	FOR SIGN DETAIL SHEET: PLAN SHEET NUMBER	FOR SIGN DETAIL SHEET: STD. SHEET NUMBER
7.14 RT.	L F L 24,000	24"x24"			4								1	X													E-15A
7.18 RT.	STOP	30"x30"			6.25								1	X													E-15C
7.42 LT.	TRUCK LANE 500 FEET	24"x30"			5								1	X													E-15A
TOTAL					15.25									84													

TRAFFIC ITEM SUMMARY

ITEM NO.	ITEM	UNIT		QUANTITY		RNDG.	TOTAL
6416.40	DURABLE 24" STOP BAR	LF		20		-	20
6416.44	DURABLE LETTER IN WORD MARKING	EA		26		-	26
6416.50	TEMP. 4" WHITE LINE	LF		28,860		40	28,900
6416.51	TEMP. 4" YELLOW LINE	LF		53,026		74	53,100
6675.20	TRAFFIC SIGNS, TYPE A	SF		280.6		9.4	290
6675.30	FLANGED CHANNEL SIGN POSTS	LB		1409		11	1420
6675.50	REMOVING SIGNS	EA		62		-	62
6675.60	ERECTING SALVAGED SIGNS	EA		2		-	2
6710.15	REMOVE AND REPLACE REFLECTOR UNITS	EA		77		3	80
6820.20 MOD.	TRAVEL INFO SIGNS (NON-PARTICIPATED FEDERAL FUNDS)	SF		25		-	25

NOTES AND DETAILS

PROJECT MARLBORO ROUTE 9 PROJECT # F010-1(27)S

TEMPORARY 4" YELLOW LINE

MILE	MILE	LT.	RT.	QTY. LEFT	℄	QTY. RT.	TOTAL (LF)
4.692	4.71	SOLID	DASH	95		24	119
4.71	4.89	SOLID	SOLID	950		950	1900
4.89	5.01	DASH	SOLID	158		634	792
5.01	7.30	SOLID	SOLID	12,091		12,091	24,182
						TOTAL	26,993
							480
				10TH @ 40' = 240		x2	26,513
				ASSUME 100% LOSS IN			
				LEVELING COURSE			26,513
						TOTAL	53,026

TEMPORARY 4" WHITE LINE

MILE	MILE	LT.	RT.	QTY. LEFT	℄ SINGLE DASH	QTY. RT.	(LF) TOTAL
4.692	7.30	SOLID	SOLID	13770		13770	27540
5.63	6.18	(CLIMBING LANE) DASH	(CLIMBING LANE) DASH		700		700
6.83	7.3	(CLIMBING LANE) DASH	(CLIMBING LANE) DASH		620		620
						TOTAL	28860

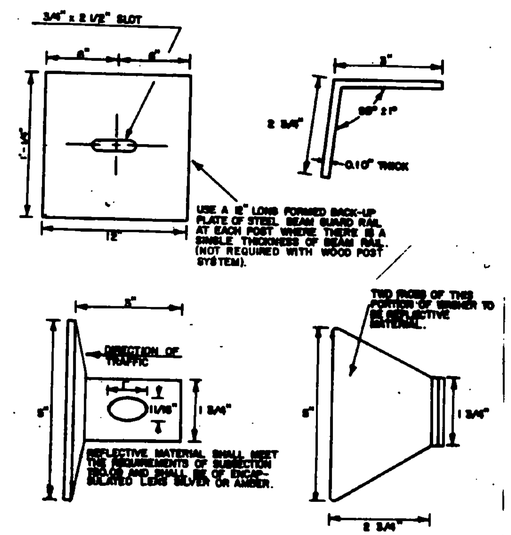

THIS REFLECTORIZED ALUMINUM WASHER IS TO BE PLACED IN VALLEY OF BEAM WHEN MOUNTING BEAM ONTO EACH FIFTH POST. WASHER SHALL MEET SPECIFICATION REQUIREMENTS FOR ASTM B209 ALLOY 5052-H38.

DRAWN BY _____ DATE _____
CHKED BY JB DATE 10-22-92
MARLBORO
PROJ. # NO. 010-1(27)S
TRAFFIC SHEET NO. 50a SHEET 18 OF 45

18