

SHRUB PLANTING DETAIL

NOT TO SCALE

| PLANT LIST | | | | |
|------------|-------------------|------------------------------|--|--------------------|
| Qty. | Size | SHRUBS Common Name / AREA | Botanical Name | Spacing / COMMENTS |
| 20 | 12" TO 18" HEIGHT | 'ANTHONY WATERER' SPIREA | SPIREA X BUMALDA 'ANTHONY WATERER' | 3' ON CENTER |
| 8 | 12" TO 18" HEIGHT | 'LIMEMOUND' SPIREA | SPIREA 'MONHUB' P.P.# 5834 'LIMEMOUND' | 3' ON CENTER |

NOTES

Follow VTRANS Planting Specifications Section 656.

Water per specifications 5 gallons per shrub at time of planting and 5 gallons per shrub 2 times per week

ADD LANDSCAPE BACKFILL MIX TO THE BED AS DIMENSIONED PRIOR TO PLANTING. LANDSCAPE BACKFILL MIX SHALL BE 2/3 APPROVED TOPSOIL MIX AND 1/3 APPROVED COMPOST (see VTrans Specifications)

APPROVED ALTERNATIVE SPECIES FOR 'ANTHONY WATERER' SPIREA


| | |
|--------------------------|-----------------------------------|
| 'LITTLE PRINCESS' SPIREA | SPIREA JAPONICA 'LITTLE PRINCESS' |
| 'GOLDFLAME' SPIREA | SPIREA X BUMALDA 'GOLDFLAME' |
| 'SNOWMOUND' SPIREA | SPIREA NAPPONICA 'SNOWOUND' |

APPROVED ALTERNATIVE SPECIES FOR 'LIMEMOUND' SPIREA

| | |
|-----------------------|---|
| 'GOLDMOUND' SPIREA | SPIREA JAPONICA 'GOLDMOUND' |
| 'MAGIC CARPET' SPIREA | SPIREA X BUMALDA WALBURN 'MAGIC CARPET' |

TREE PROTECTION NOTES

- DURING CONSTRUCTION: PROTECT TREES TO BE SAVED BY ERECTING BARRIER FENCE JUST AT LIMIT OF CONSTRUCTION AS INDICATED (PLEASE SEE LANDSCAPE PLANS AND TREE PROTECTION DETAIL). INSTALL SIGNAGE AT EACH PROTECTION ZONE WHICH CLEARLY READS: "TREES ARE BEING PROTECTED. NO UNAUTHORIZED TRESPASS IS ALLOWED".
- AVOID CUTTING ROOTS OF TREES WHENEVER POSSIBLE. WHEN AVOIDANCE IS NOT POSSIBLE, CUT ROOTS FLUSH (SAW THOSE ROOTS GREATER THAN 1" WIDE), WHICH WILL ENCOURAGE NEW ROOT GROWTH. DO NOT RIP ROOTS WITH EXCAVATOR OR OTHER HEAVY EQUIPMENT.
- BACKFILL AS SOON AS POSSIBLE; KEEP ROOT ENDS MOIST WITH WET BURLAP OR SIMILAR MATERIAL UNTIL ABLE TO BACKFILL. ADD A ROOT STIMULATOR SUCH AS MYCORRHIZAL FUNGI PER MANUFACTURER'S INSTRUCTIONS, AND WATER (PER APPROVED WATERING SPECIFICATIONS) TO THE ENTIRE BACKFILL AREA WITHIN 24 HOURS.
- NO EXCAVATED OR BACKFILL MATERIAL SHALL BE PILED IN TREE PROTECTION ZONE; NO EQUIPMENT SHALL BE STORED OR PILED IN TREE PROTECTION ZONE.
- IF A PROTECTED TREE IS DAMAGED DUE TO THE CONTRACTOR'S NEGLIGENCE AND IS NOT REPAIRABLE (AS DETERMINED BY THE ENGINEER OR VAOT LANDSCAPE ARCHITECT), THEN THE CONTRACTOR SHALL REPLACE THE TREE (AT THE CONTRACTOR'S EXPENSE AND ACCORDING TO APPROVED PLANTING TECHNIQUES) WITH THE SAME TREE OF EQUAL VALUE, OR TWO OR MORE TREES WITH A TOTAL VALUE EQUAL TO THAT OF THE DAMAGED TREE. IN ADDITION, WITH THE EXCEPTION OF FENCING, ALL TREE PROTECTION MEASURES, ROOT PRUNING, AND OTHER MATERIALS WILL NOT BE PAID SEPARATELY, BUT WILL BE CONSIDERED INCIDENTAL TO ALL OTHER LANDSCAPING CONTRACT ITEMS.

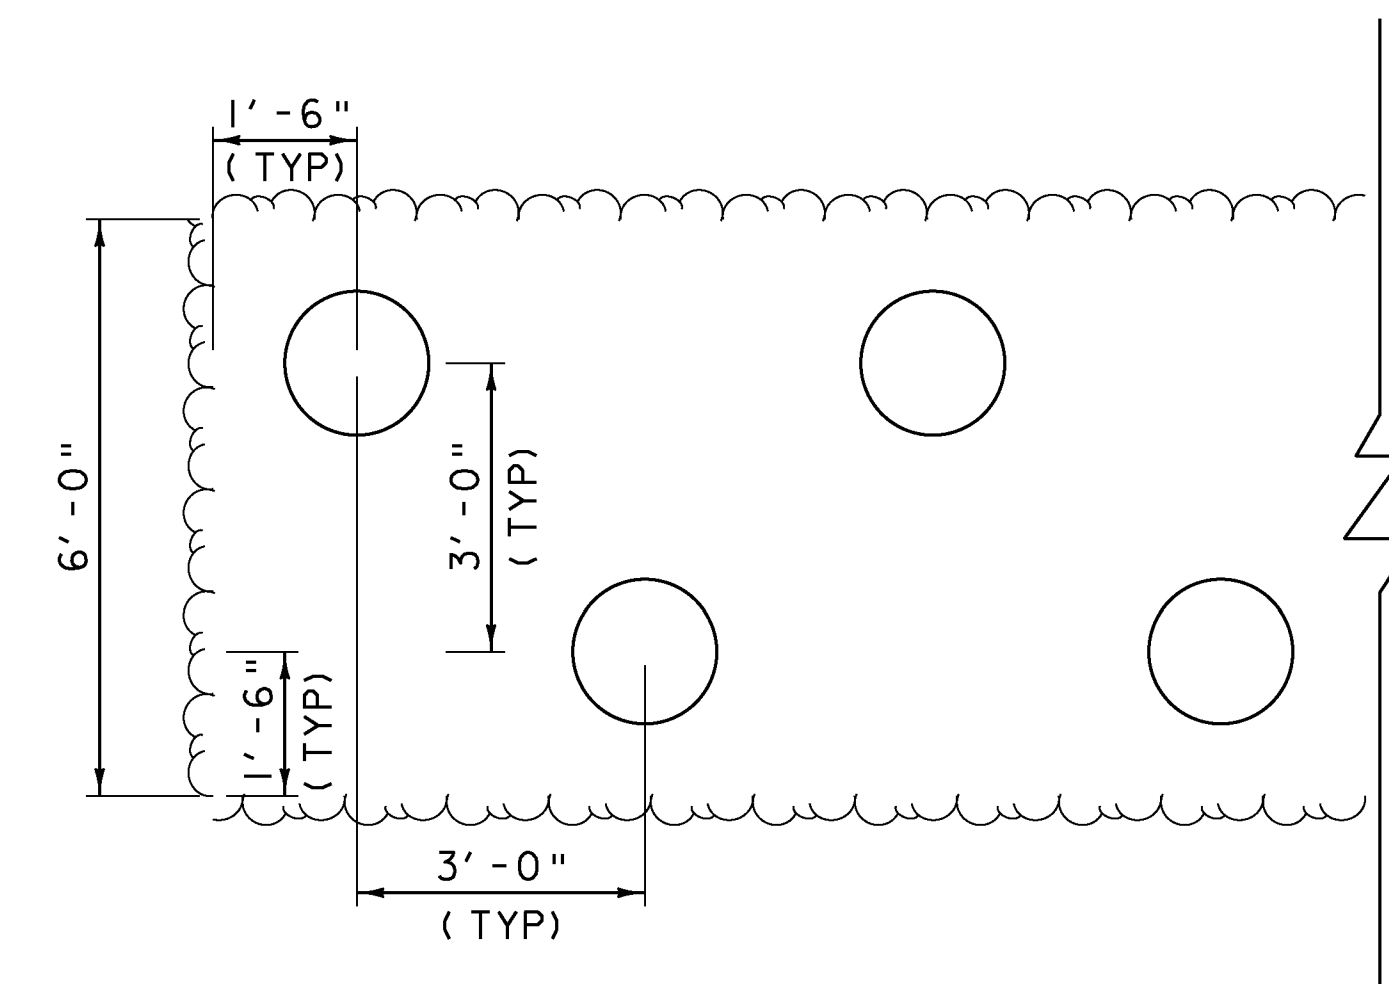

TYPICAL SHRUB BED LAYOUT

NOT TO SCALE

| | |
|-------------------------------|------------------------|
| PROJECT NAME: MILTON | PLOT DATE: 23-FEB-2011 |
| PROJECT NUMBER: STP 5800 (2) | DRAWN BY: D. LYMAN |
| FILE NAME: +92d289landdet.dgn | CHECKED BY: J. DEVLIN |
| PROJECT LEADER: J. SCHULTZ | SHEET 58 OF 104 |
| DESIGNED BY: D. LYMAN | |
| LANDSCAPE DETAIL SHEET | |