

646.40 DURABLE 4" WHITE LINE (THERMOPLASTIC)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)


MIDDLEBURY:
 STA. 321+00.0 - STA. 337+00.0 LT & RT

646.41 DURABLE 4" YELLOW LINE (THERMOPLASTIC)
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

MIDDLEBURY:
 STA. 321+00.0 - STA. 337+00.0 LT C RT
 S - S

675.50 REMOVING SIGNS
 AS SHOWN - 9

680.20 TRAVEL INFORMATION SIGNS (MOD.)
 MIDDLEBURY:
 STA. 324+50.0 LT (24 SF)

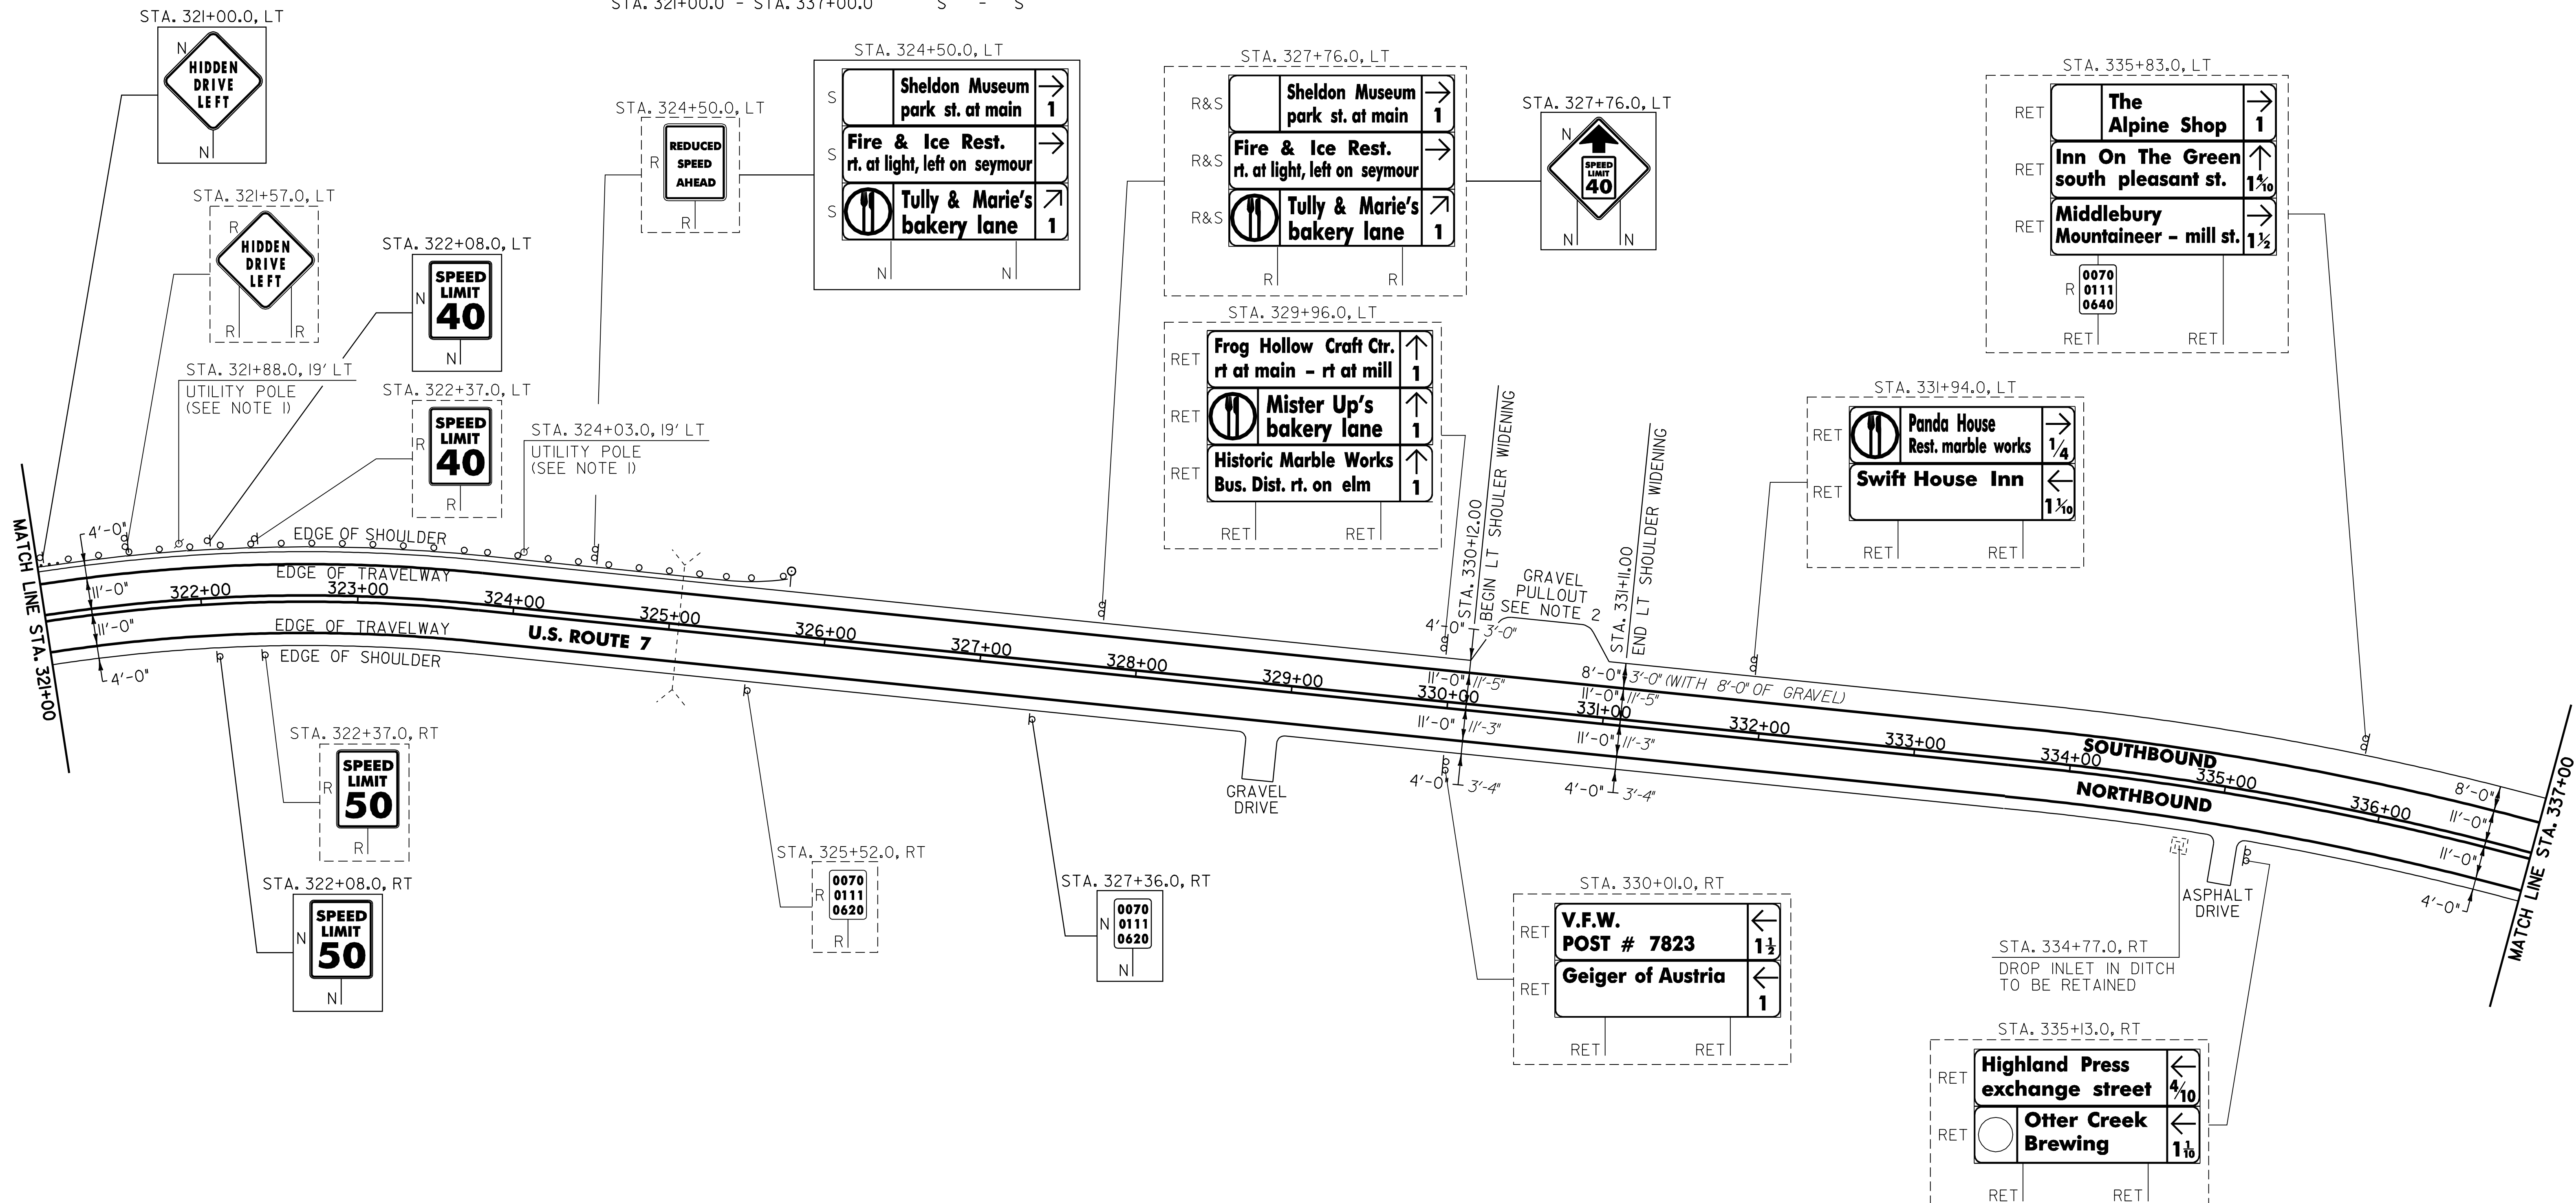

621.20 STEEL BEAM GUARDRAIL (GALVANIZED)

MIDDLEBURY:
 STA. 321+00.0 - STA. 325+37.5 LT (477.5 LF)

621.505 MANUFACTURED TERMINAL SECTION (FLARED)

MIDDLEBURY:
 STA. 325+37.5 - STA. 325+75.0 LT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL

MIDDLEBURY:
 STA. 321+00.0 - STA. 325+14.0 LT (414.0 LF)

676.10 DELINEATORS WITH STEEL POSTS

♀ TYPE I WHITE

MIDDLEBURY:
 STA. 325+75.0 LT

NOTES:

- SEE SHEET 62 FOR REDUCED STEEL BEAM GUARDRAIL POST SPACING AT UTILITY POLE DETAIL.
- PROVIDE A 5 FT WIDE, 2" TYPE IIIS APRON FOR THE EXISTING GRAVEL PULLOUT. ANY REQUIRED EXCAVATION SHALL BE PERFORMED AS DIRECTED BY THE RESIDENT ENGINEER AND PAID FOR UNDER ITEM 608.25 ALL PURPOSE EXCAVATOR RENTAL, TYPE I.

SIGN LEGEND

- R = REMOVE
- S = SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- EXISTING = - - - - -
- NEW = _____

NOT TO SCALE

PROJECT LAYOUT SHEET #3

PROJECT NAME: MIDDLEBURY - NEW HAVEN
 PROJECT NUMBER: NH 9813(1)S

FILE NAME: p97bl66.dgn
 PROJECT LEADER: D.E.G.
 DESIGNED BY: J.S.P.
 IPARM FILE: pbl66103.1

PLOT DATE: \$DATE\$
 DRAWN BY: C.A.K.
 CHECKED BY: D.W.E.
 SHEET 12 OF 63