


646.40 DURABLE 4" WHITE LINE (THERMOPLASTIC)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

NEW HAVEN:
 STA. 85+00.0 - STA. 101+00.0 LT & RT
 STA. 85+00.0 - STA. 98+00.0 DASHED RT

646.41 DURABLE 4" YELLOW LINE (THERMOPLASTIC)
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED

NEW HAVEN:
 STA. 85+00.0 - STA. 101+00.0 LT C RT
 S - S

675.50 REMOVING SIGNS
 AS SHOWN - 3

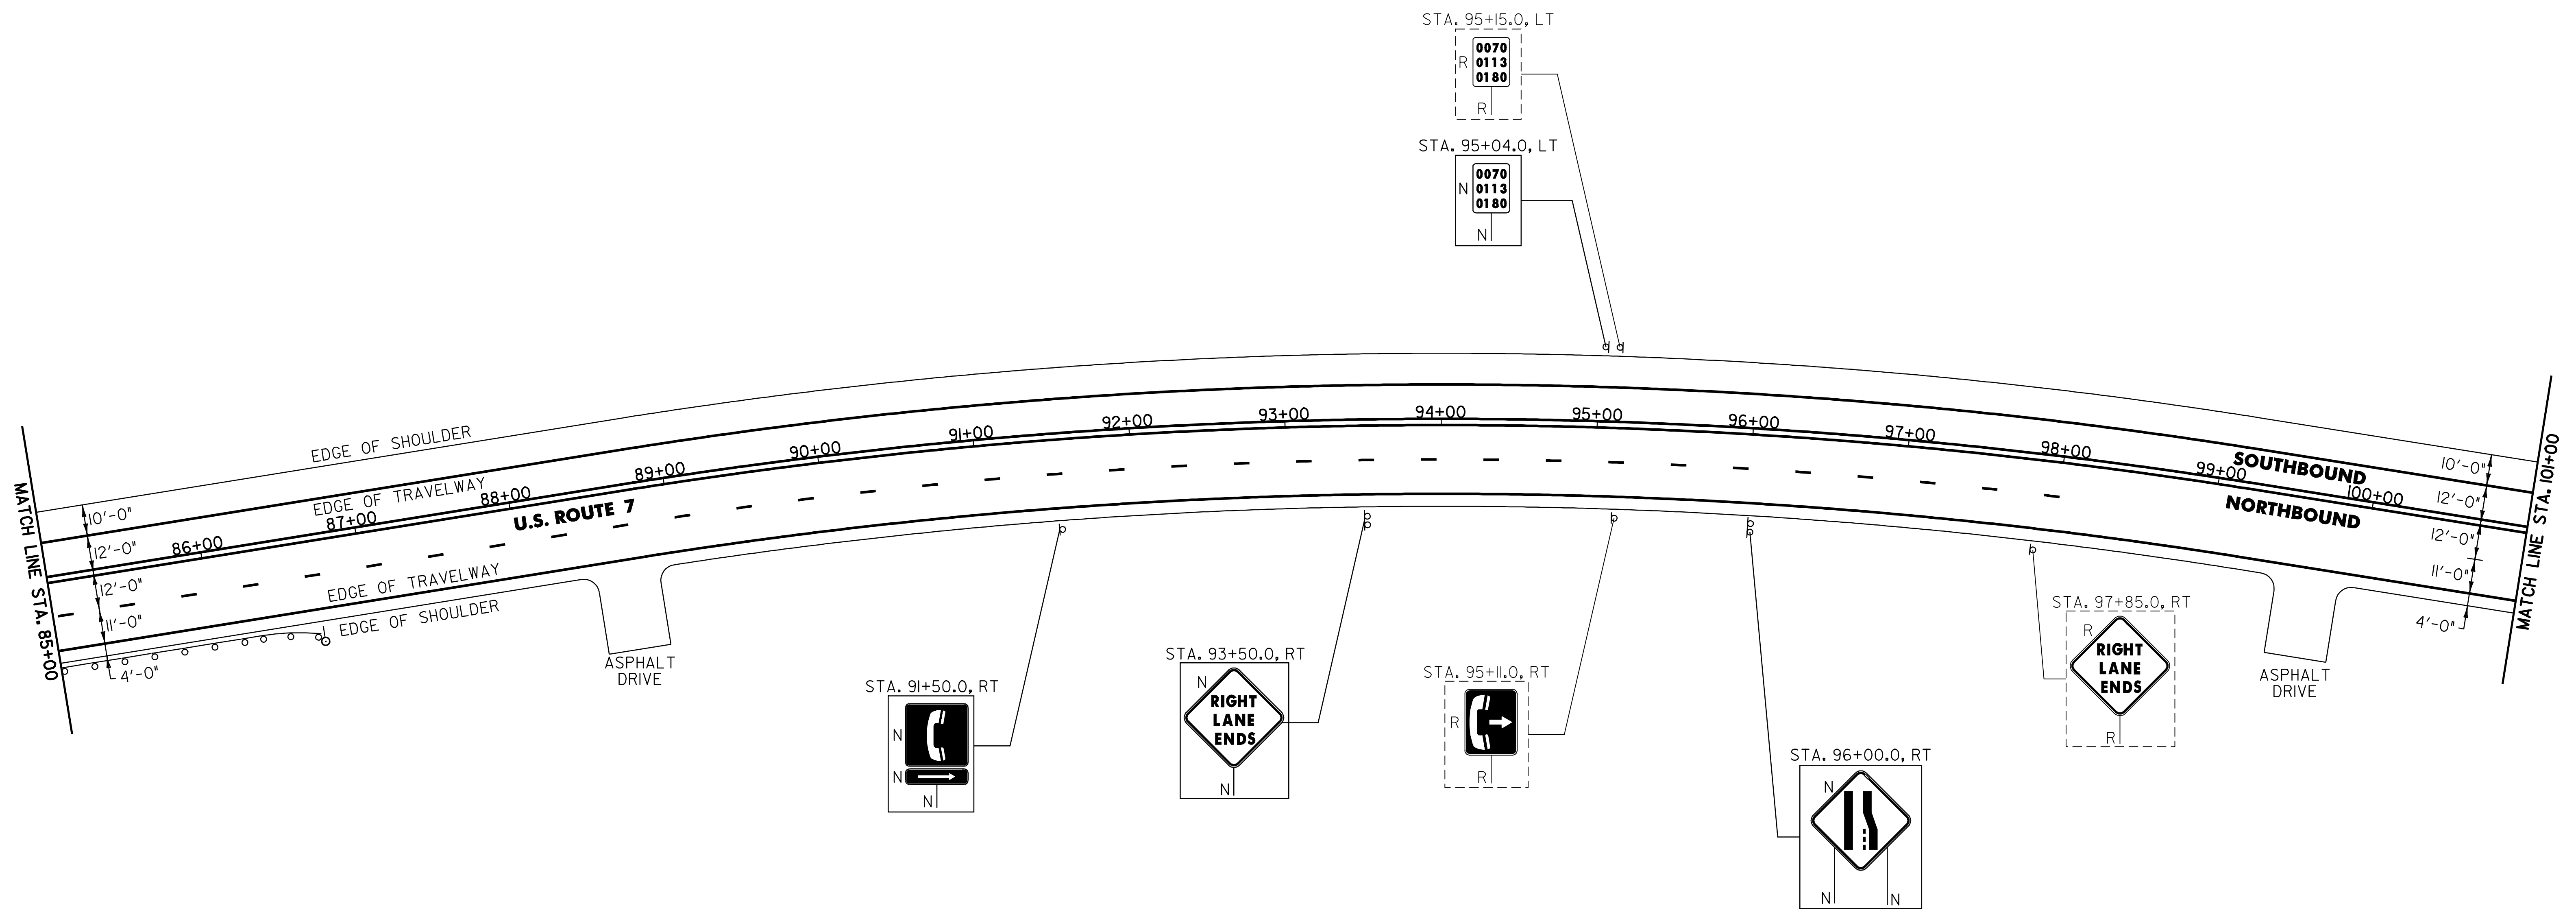

621.20 STEEL BEAM GUARDRAIL (GALVANIZED)
 NEW HAVEN:
 STA. 85+00.0 - STA. 86+30.0 RT (130.0 LF)

621.505 MANUFACTURED TERMINAL SECTION (FLARED)
 NEW HAVEN:
 STA. 86+30.0 - STA. 86+67.5 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 NEW HAVEN:
 STA. 85+00.0 - STA. 86+48.0 RT (148.0 LF)

676.10 DELINEATORS WITH STEEL POSTS
 ♀ TYPE I WHITE
 NEW HAVEN:
 STA. 86+67.5 RT

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = - - - - -
 NEW = _____

PROJECT LAYOUT SHEET #13

PROJECT NAME: MIDDLEBURY - NEW HAVEN
 PROJECT NUMBER: NH 9813(1)S
 FILE NAME: p97b166.dgn
 PROJECT LEADER: D.E.G.
 DESIGNED BY: J.S.P.
 IPARM FILE: pbl66113.i
 PLOT DATE: \$DATE\$
 DRAWN BY: C.A.K.
 CHECKED BY: D.W.E.
 SHEET 22 OF 63

NOT TO SCALE