

646.40 DURABLE 4" WHITE LINE (THERMOPLASTIC)  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

NEW HAVEN:  
 STA. 133+00.0 - STA. 148+50.0 LT & RT

646.41 DURABLE 4" YELLOW LINE (THERMOPLASTIC)  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

NEW HAVEN: LT C RT  
 STA. 133+00.0 - STA. 138+50.0 S - D -  
 STA. 138+50.0 - STA. 142+50.0 - D - S  
 STA. 142+50.0 - STA. 146+50.0 D - S  
 STA. 146+50.0 - STA. 148+50.0 S - S  
 STA. 147+36.48 DOUBLE SOLID LT, TH-26

646.46 DURABLE 24" STOP BAR (THERMOPLASTIC)  
 NEW HAVEN:  
 STA. 147+36.48 LT, TH-26

646.66 TEMPORARY 24" STOP BAR (PAINT)  
 NEW HAVEN:  
 STA. 147+36.48 LT, TH-26


646.50 DURABLE LETTER OR SYMBOL (THERMOPLASTIC)  
 NEW HAVEN:  
 STA. 147+36.48 LT, TH-26, "S,T,O,P" (4 EA)

646.70 TEMPORARY LETTER OR SYMBOL (PAINT)  
 NEW HAVEN:  
 STA. 147+36.48 LT, TH-26, "S,T,O,P" (4 EA)

675.50 REMOVING SIGNS  
 AS SHOWN - 12

675.60 ERECTING SALVAGED SIGNS  
 AS SHOWN - 2

680.20 TRAVEL INFORMATION SIGNS (MOD.)  
 NEW HAVEN:  
 STA. 141+08.0 LT (16 SF)

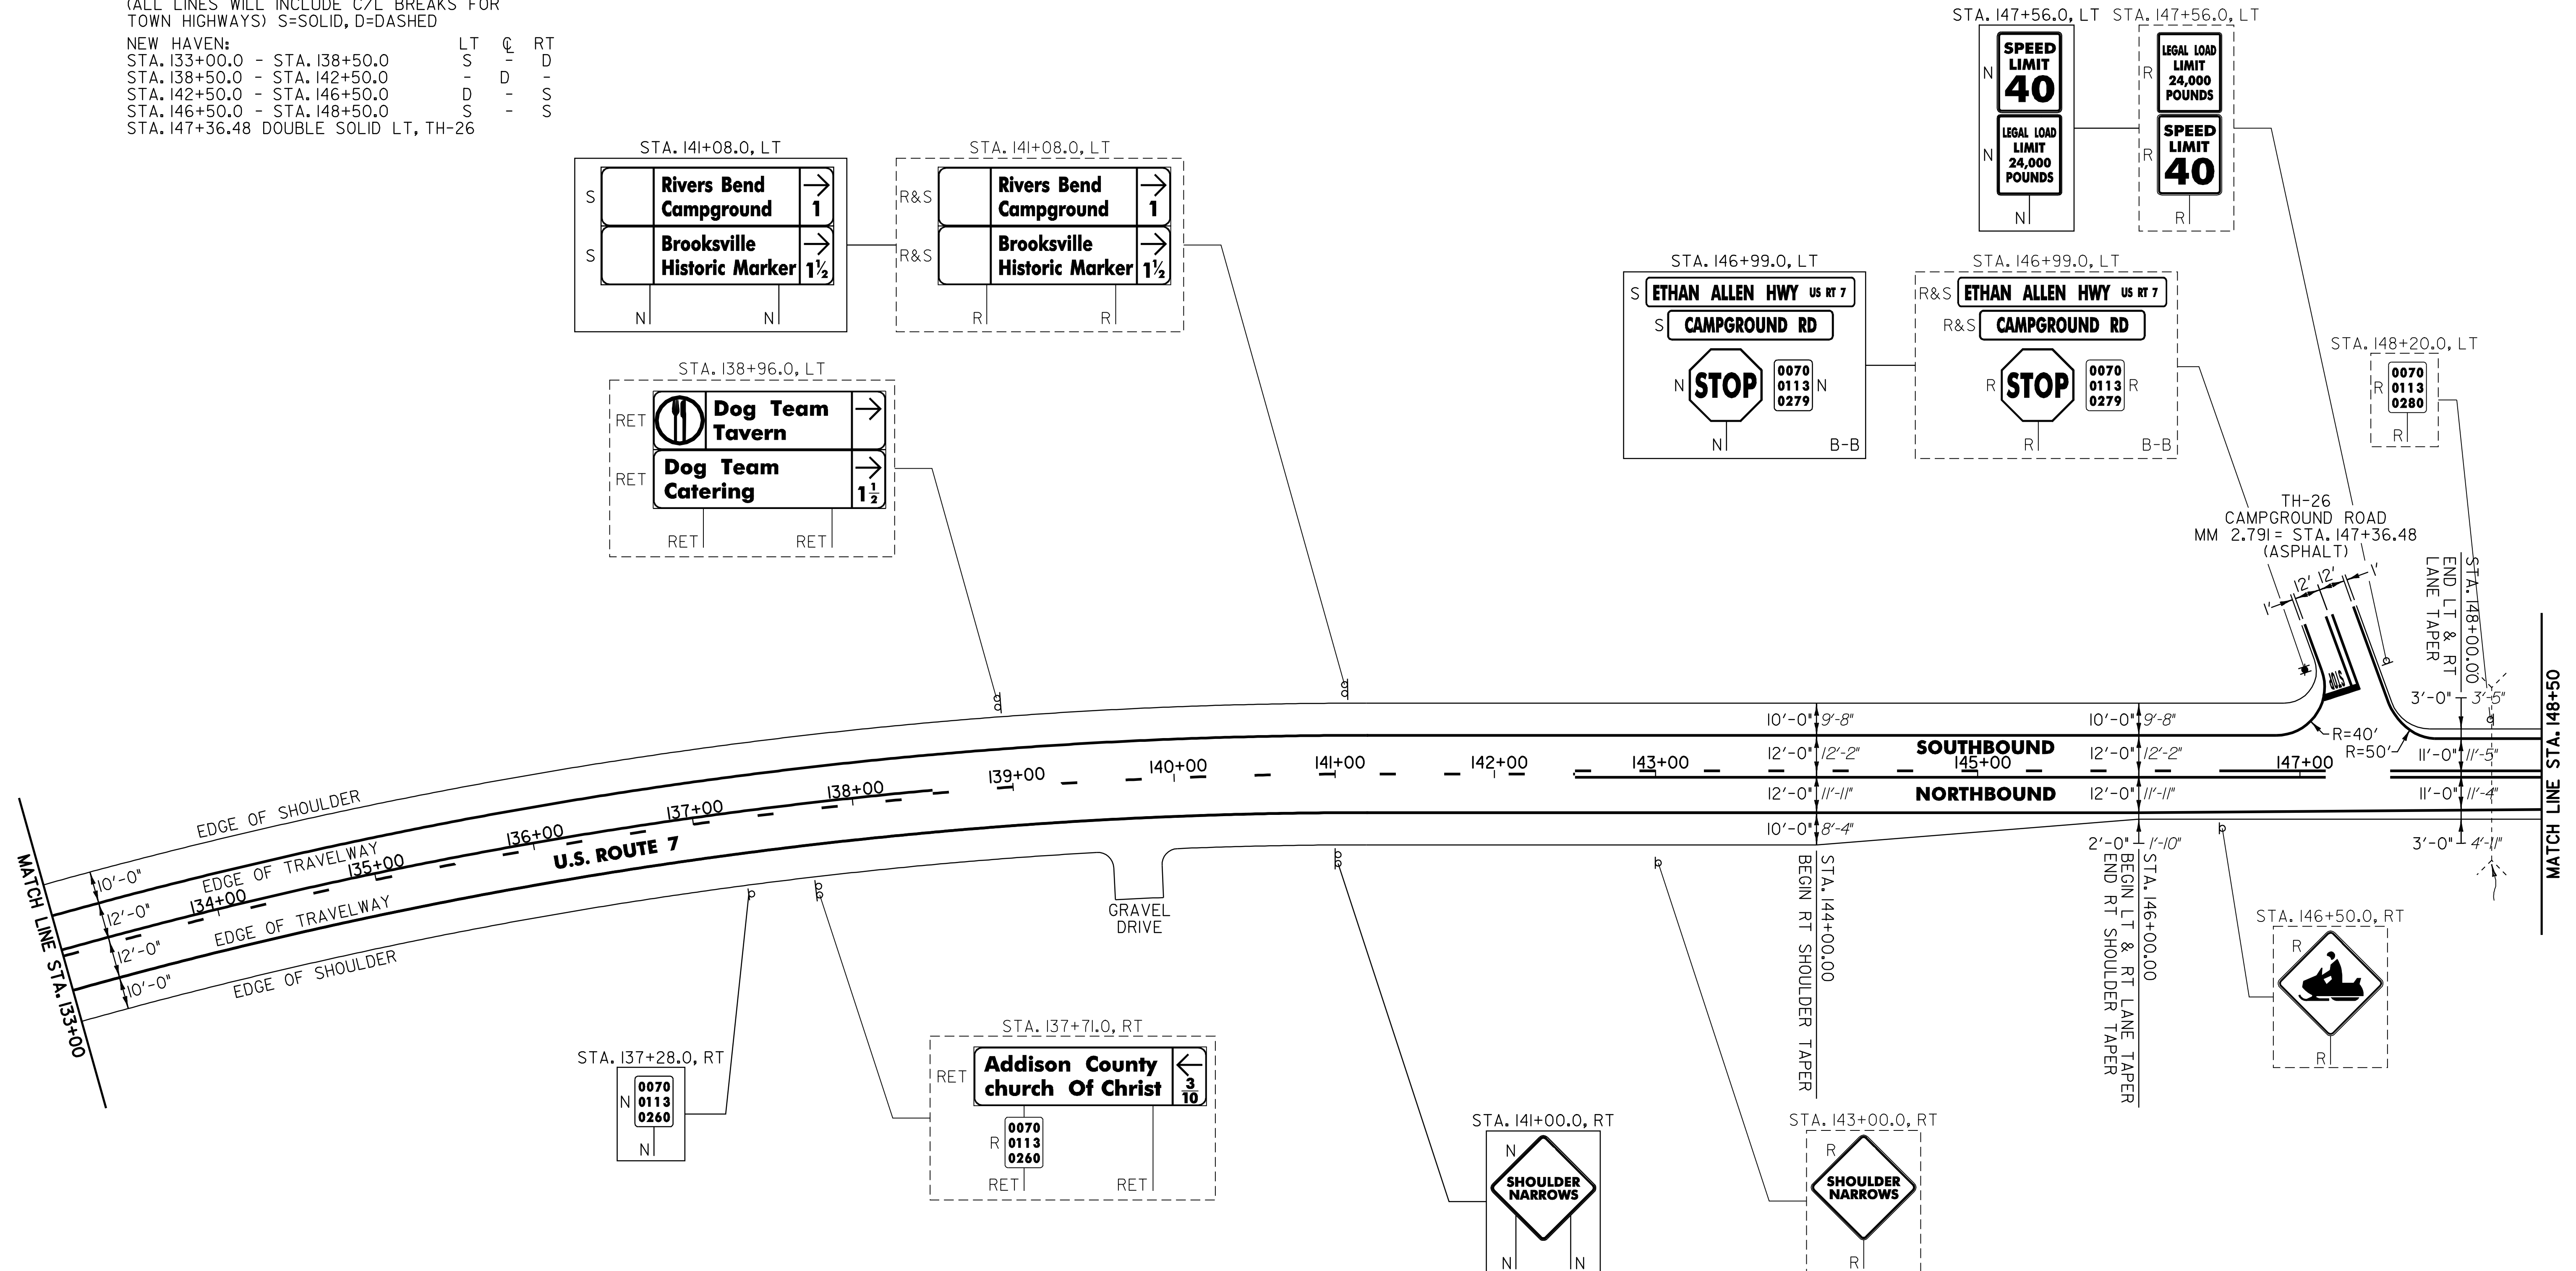

NOTES:

- PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM U.S. ROUTE 7 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.
- THERE ARE EXISTING UNDERGROUND UTILITIES ON THE LEFT SIDE OF U.S. ROUTE 7 IN THE VICINITY OF TH-26 IN NEW HAVEN. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING "DIG SAFE" AT (888) 344-7233 TO DETERMINE THE LOCATIONS OF THESE UTILITIES PRIOR TO PERFORMING ANY SUBSURFACE OPERATIONS IN THIS AREA.

**SIGN LEGEND**  
 R = REMOVE  
 S = SALVAGE  
 N = NEW  
 RET = RETAIN  
 B-B = BACK TO BACK  
 EXISTING = - - - - -  
 NEW = \_\_\_\_\_

<b>PROJECT LAYOUT SHEET #16</b>	PROJECT NAME: MIDDLEBURY - NEW HAVEN	
	PROJECT NUMBER: NH 9813(1)S	
FILE NAME: p97bl66.dgn	PROJECT LEADER: D.E.G.	PLOT DATE: \$DATE\$
DESIGNED BY: J.S.P.	IPARM FILE: pbl66116.i	DRAWN BY: C.A.K.
		CHECKED BY: D.W.E.
		SHEET 25 OF 63

NOT TO SCALE