


MATERIAL TOLERANCES		
PAVEMENT (TOTAL DEPTH):	±	5
SUBBASE (TOTAL DEPTH):	±	30
SAND BORROW (TOTAL DEPTH):	±	30


TYPICAL SECTIONS

NOT TO SCALE

45 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE 111S) - (1 - 45 LIFT)
 170 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT (TYPE 11S) - (2 - 85 LIFTS)
 610 SUBBASE OF DENSE GRADED CRUSHED STONE
 610 SAND BORROW

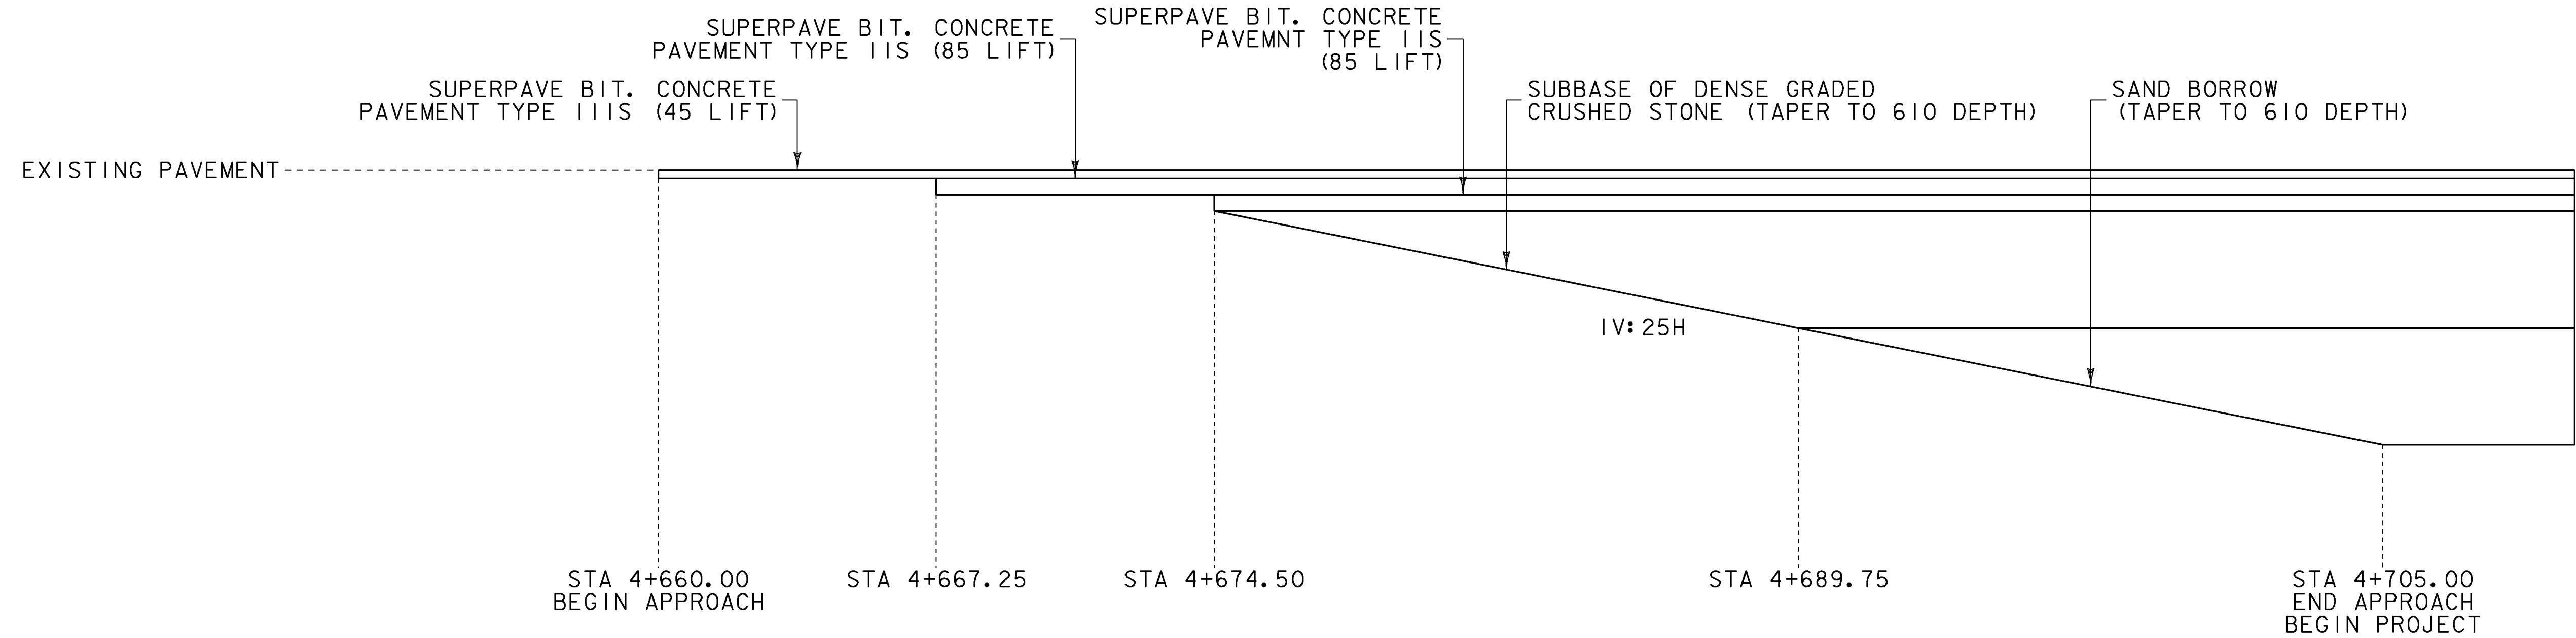

**US ROUTE 2
 BEGIN PROJECT MATERIAL TRANSITION DETAIL**

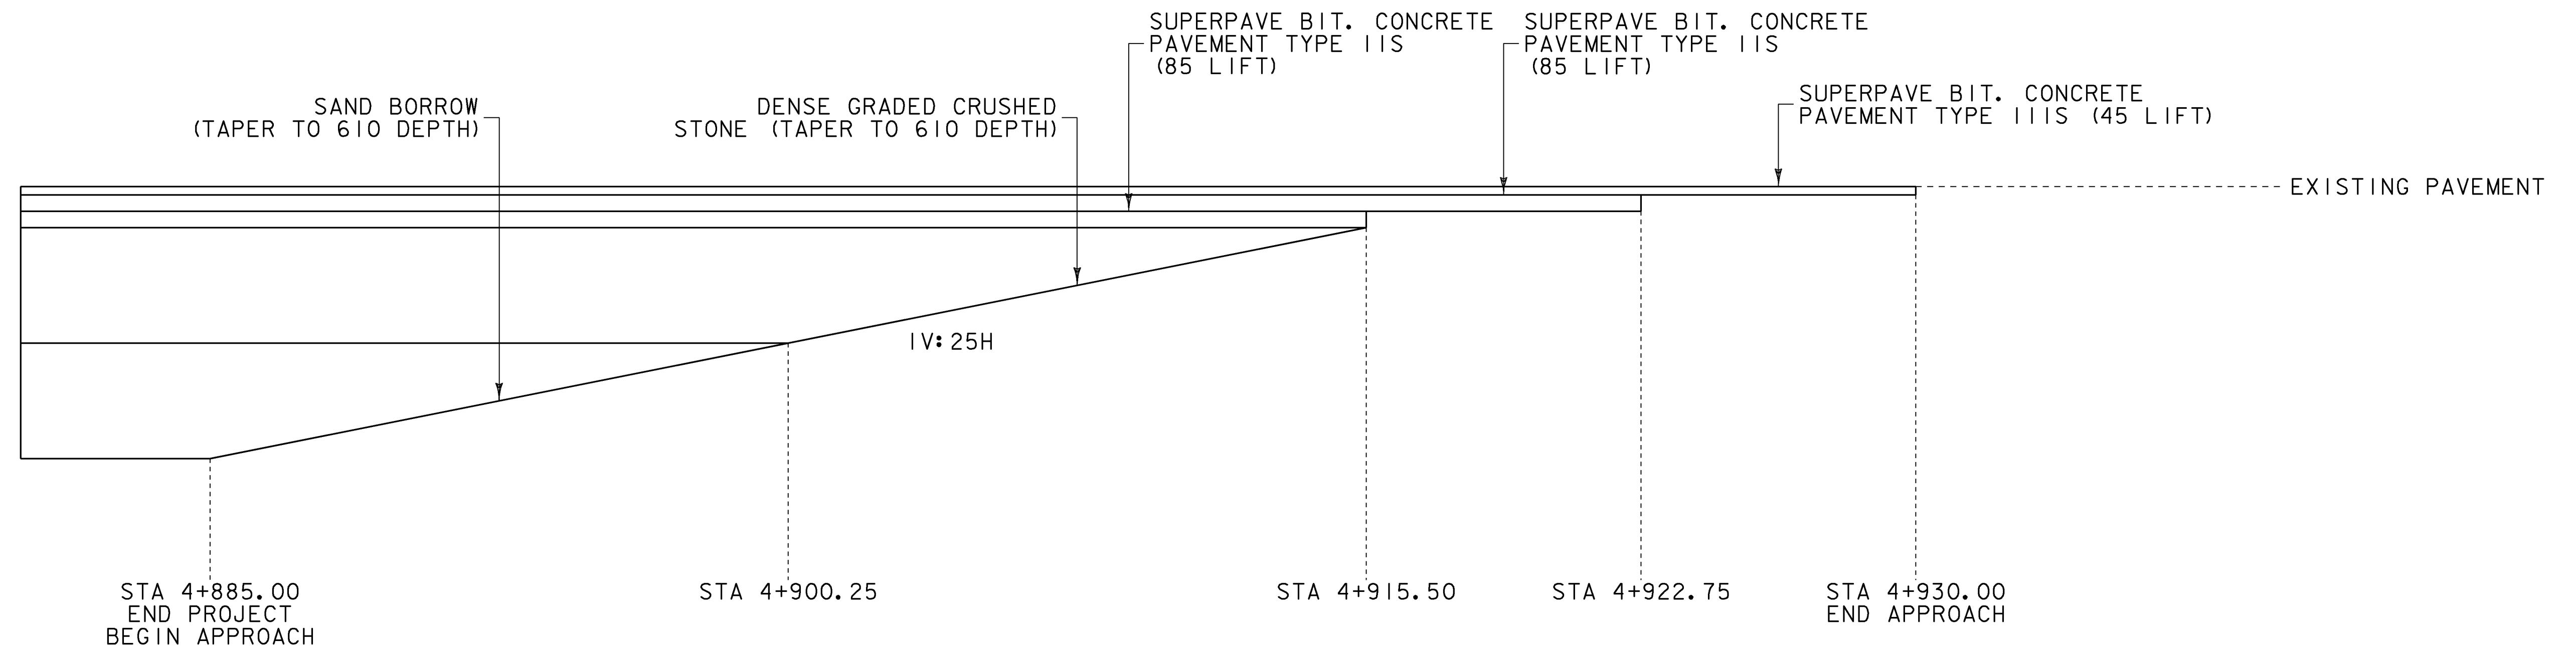

**US ROUTE 2
 END PROJECT MATERIAL TRANSITION DETAIL**

PROJECT NAME: EAST MONTPELIER
 PROJECT NUMBER: STPG 028 - 3(35)S

FILE NAME: +98b028+typ.dgn	PLOT DATE: 22-MAR-2010
PROJECT LEADER: J. SCHULTZ	DRAWN BY: I. DEGUTIS
DESIGNED BY: J. GRUCHACZ	CHECKED BY: J. DEVLIN
MATERIAL TRANSITION SHEET 1	SHEET 7 OF 142