N

VT STATE PLANE GRID

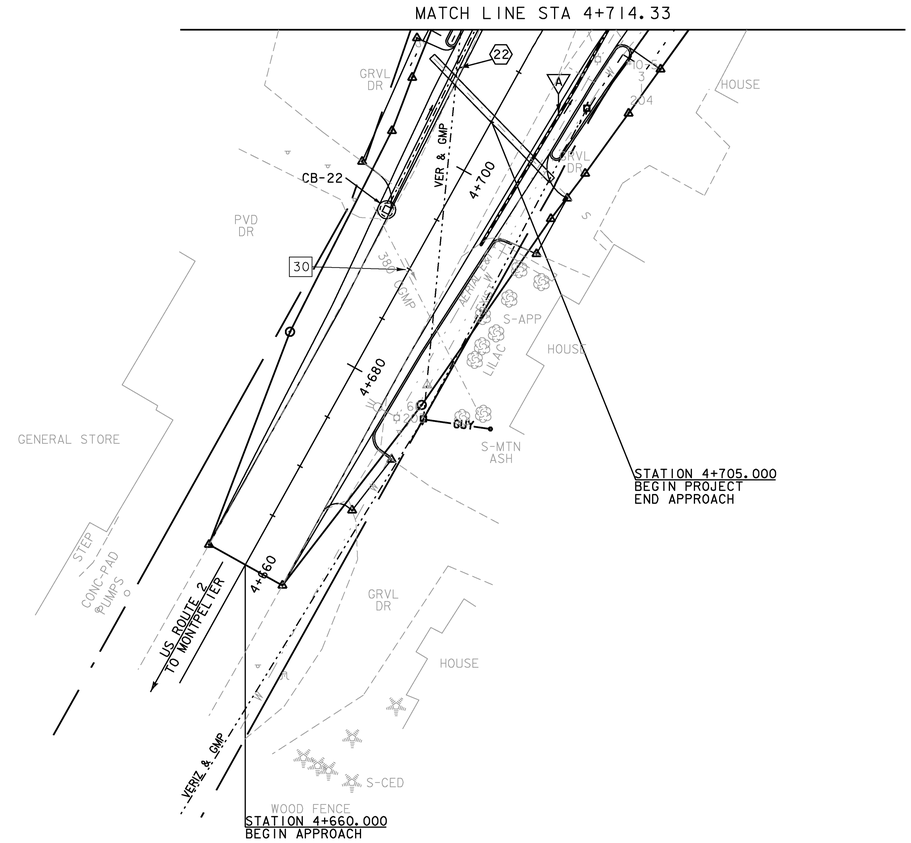

NEW DRAINAGE

22 STA 4+693.66 LT - 4+720.00 LT
NEW 450MM X 26.9M RCP/CPEP(SL)
W/1200MM PRCCB @ STA 4+693.66 LT
W/GRATE TYPE D(1)

EXISTING DRAINAGE

30 STA 4+693.30 LT - 4+681.77 RT
EXISTING 380MM X 20.7M CGMP = REMOVE

605.11 200 MM UNDERDRAIN PIPE

A STA 4+695.00 RT - 4+825.00 RT
NEW 200MM X 123.7M UNDERDRAIN PIPE
W/FLUSHING BASIN @ STA 4+695.00 RT

625.10 SLEEVES FOR UTILITIES (1 X 600MM)
STA. 4+703.05 RT APPROX. - 4+707.48 LT APPROX,
NEW 600MM X 15.3M APPROX. CPEP(SL)

NOTE:
THE EXISTING PRIVATE SEWER LINE DEPICTED AT APPROXIMATE STATION 4+700.75 RT - 4+711.00 LT IS FOR REFERENCE ONLY. SEWER LINE LOCATION, DEPTH, AND MATERIAL IS UNKNOWN. THE SELECTED CONTRACTOR SHALL EXERCISE EXTREME CAUTION WHEN WORKING IN THE GENERAL VICINITY OF THIS SEWER LINE AND SHALL INSTALL A 600MM CPEP(SL) SLEEVE ADJACENT TO THE EXISTING LINE FOR FUTURE USE. WORK SHALL BE IN ACCORDANCE WITH, AND PAYMENT MADE UNDER 625.10 SLEEVES FOR UTILITIES (1 X 600MM). ALL WORK AS DESCRIBED SHALL OCCUR WITHIN THE STATE OF VERMONT OWNED RIGHT-OF-WAY.

0 10 20 30

SCALE IN METERS

PROJECT NAME:	EAST MONTPELIER
PROJECT NUMBER:	STPG 028-3(35)S
FILE NAME: t98b028bdr.dgn	PLOT DATE: 29-MAR-2010
PROJECT LEADER: J. SCHULTZ	DRAWN BY: D. LYMAN
DESIGNED BY: J. GRUCHACZ	CHECKED BY: J. DEVLIN
DRAINAGE LAYOUT SHEET 1	SHEET 38 OF 142