

646.40 DURABLE 100 mm WHITE LINE (THERMOPLASTIC)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

WALLINGFORD:
 STA. 3+720.0 - STA. 4+100.0 LT & RT

646.41 DURABLE 100 mm YELLOW LINE (THERMOPLASTIC)
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED

WALLINGFORD:
 STA. 3+720.0 - STA. 4+100.0 LT CL RT
 S S S

646.60 TEMPORARY 100 mm WHITE LINE (PAINT)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)


WALLINGFORD:
 STA. 3+720.0 - STA. 4+100.0 LT & RT

646.61 TEMPORARY 100 mm YELLOW LINE (PAINT)
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED

WALLINGFORD:
 STA. 3+720.0 - STA. 4+100.0 LT CL RT
 S S S

675.50 REMOVING SIGNS

AS SHOWN - 4

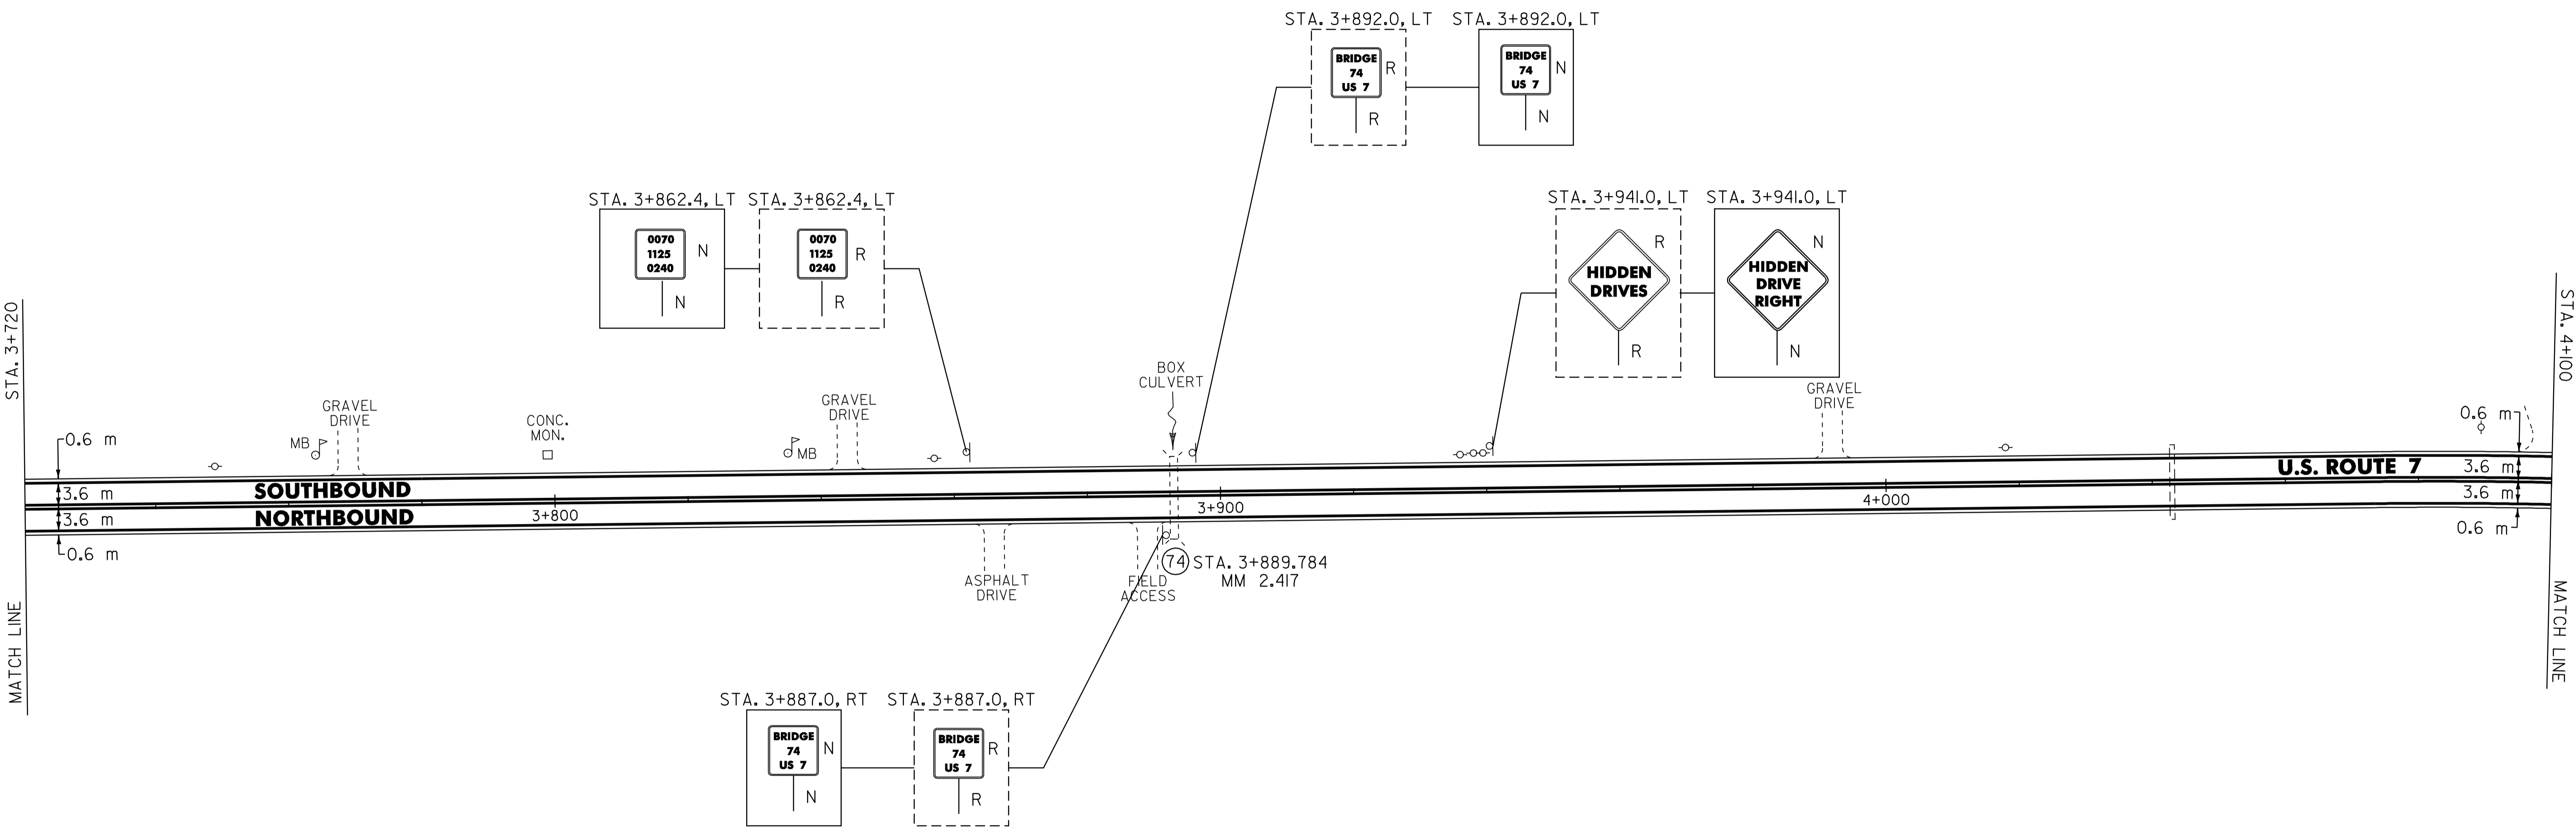

NOTE:

I. THE CONTRACTOR SHOULD BE AWARE THAT EXISTING BURIED UTILITIES (SUCH AS PHONE CABLE, FIBER OPTIC CABLE, SEWER LINES, ETC.) ARE LOCATED ADJACENT TO U.S. ROUTE 7 WITHIN THE PROJECT LIMITS. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING "DIG SAFE" AT 1-888-344-7233 TO DETERMINE THE EXACT LOCATIONS OF THESE UTILITIES PRIOR TO INSTALLING GUARDRAIL, CLEANING DITCHES OR PERFORMING ANY OTHER OPERATIONS THAT MAY DISTURB THE EXISTING SUBSURFACE CONDITIONS.

SIGN LEGEND
 R= REMOVE
 S= SALVAGE
 N= NEW
 RET= RETAIN
 B-B= BACK TO BACK
 EXISTING= -----
 NEW= _____
 ⊕ = SIGN TO BE RETURNED TO THE TOWN OF WALLINGFORD

PAVING PROJECT LAYOUT # 11

SURVEYED BY N/A DATE N/A
 DRAWN BY C.A.K. DATE 8/05
 SQUAD LEADER D.E.G.
 DESIGN FILE NO. z pave/98b098/pb098.dgn
 IPARM pb098ll.1 DATE 08-JUL-2007 15
 FILE PLOTT08-JUL-2007 15
 PROJ. NAME WALLINGFORD
 PROJ. NO. NH_2108(1)S_&_SIP_EH04(6)
 SHEET 31 OF 110 SHEETS _____

DATUM
 VERTICAL N/A
 HORIZONTAL N/A