VTrans Metric

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	
VT. ROUTE 100										
ROCHESTER:										
1	10+493	10+960	RT	467						
2	11+001	11+137	LT	136						
3	11+024	11+104	RT	80						
4	11+145	11+225	RT	80						
5	11+262	11+290	LT	28						
6	11+756	11+974	LT	218						
7	13+144	13+322	LT	178						
HANCOCK:										
1	0+000	0+467	LT	467						
2	2+021	3+713	LT	1692						
3	3+890	4+025	LT	135						
GRANVILLE:										
1	0+000	0+348	LT	348						
2	1+843	1+988	LT	145						
3	3+589	3+761	RT	172						
4	3+907	4+369	RT	462						
SUBTOTAL				4608						
ROUNDING				92						
TOTAL				4700						

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	

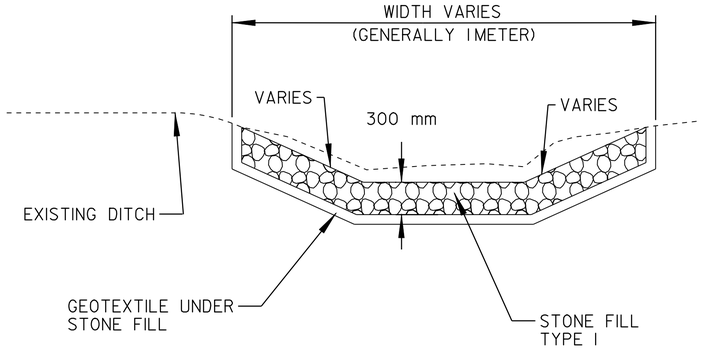

DITCH DETAIL

NOT TO SCALE

NOTES:

1. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2 AND 5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT: ROCHESTER - GRANVILLE

PROJECT NO.: AC STP 2124(1)S

DESIGN FILE NAME: /pave/98bl80/pbl80.dgn

IPARM FILE NAME: pbl80dlt.I

SURVEYED BY: N/A

SQUAD LEADER: I.P.K.

PLOT DATE: 21-DEC-2006 15

SURVEY DATE: N/A

DRAWN BY: C.A.K.

SHEET: 8 OF 49