

646.40 DURABLE 100 mm WHITE LINE  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

ROCHESTER:  
STA. 10+860.0 - STA. 11+420.0 LT & RT

646.60 TEMPORARY 100 mm WHITE LINE  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

ROCHESTER:  
STA. 10+860.0 - STA. 11+420.0 LT & RT

646.41 DURABLE 100 mm YELLOW LINE  
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED


ROCHESTER:  
STA. 10+860.0 - STA. 11+420.0 LT S C RT S

646.61 TEMPORARY 100 mm YELLOW LINE  
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

ROCHESTER:  
STA. 10+860.0 - STA. 11+420.0 LT S C RT S

DITCHING LOCATIONS

ROCHESTER:  
STA. 10+860 - STA. 10+960 RT  
STA. 11+001 - STA. 11+137 LT  
STA. 11+024 - STA. 11+104 RT  
STA. 11+145 - STA. 11+225 RT  
STA. 11+262 - STA. 11+290 LT  
(SEE SHEET 8 FOR DETAILS)

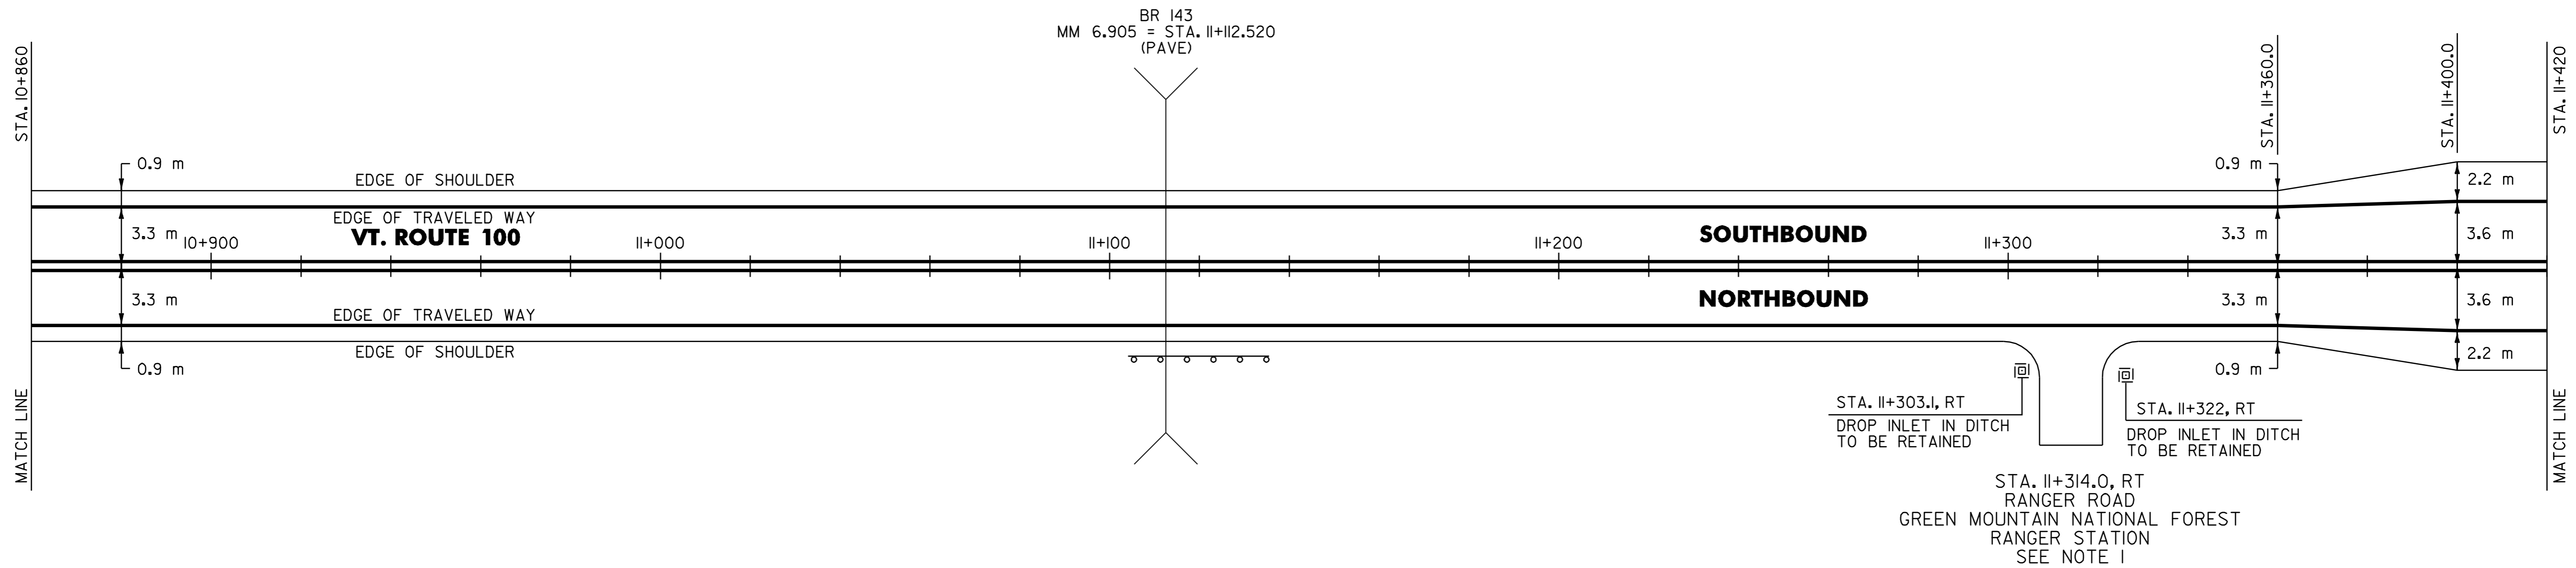

621.20 STEEL BEAM GUARDRAIL

ROCHESTER:  
STA. 11+106.8 - STA. 11+122.0 RT (15.2 m)

621.60 ANCHOR FOR STEEL BEAM RAIL

ROCHESTER:  
STA. 11+106.8 RT

621.505 MANUFACTURED TERMINAL SECTION (FLARED)

ROCHESTER:  
STA. 11+122.0 RT

NOTE:

1. PROVIDE A 35 mm TYPE III 5 m WIDE APRON FOR THE EXISTING ASPHALT DRIVE.

DATUM	
VERTICAL	N/A
HORIZONTAL	N/A

<b>PAVING PROJECT LAYOUT</b>	SURVEYED BY	N/A	DATE	N/A
	DRAWN BY	C.A.K.	DATE	11/00
	SQUAD LEADER	T.P.K.		
	DESIGN FILE NO.	/pave/98bl80/pbl80.dgn		
	IPARM FILE	pbl80p03.i	DATE PLOTTED	21-DEC-2006 15
PROJ. NAME	ROCHESTER-GRANVILLE			
PROJ. NO.	AC_SIP_2124(1)S			
SHEET	11	OF	49	SHEETS