LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10				
US ROUTE 5, BARTON				m	m	m	m2	m3	m2	
DISTRICT #9										
1	9+631	9+787	RT		156		156			
2	9+812	10+000	RT		188		188			
3	10+100	10+400	RT		300		300			
4	10+760	10+950	LT		190		190			
5	11+350	11+400	LT		50		50			
6	11+650	12+570	RT		920		920			
7	12+400	12+480	LT		80		80			
8	12+850	12+980	LT		130		130			
9	13+005	13+200	LT		195		195			
10	13+650	13+800	LT		150		150			
11	13+800	13+910	RT		110		110			
12	14+025	14+275	LT		250		250			
13	14+900	15+300	LT		400		400			
14	15+260	15+470	RT		210		210			
15	15+600	15+950	LT		350		350			
PROJECT SUBTOTALS					3679		3679			
ROUNDING					41		41			
PROJECT TOTALS					3720		3720			

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10				
							m2	m3	m2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10				
							m2	m3	m2	

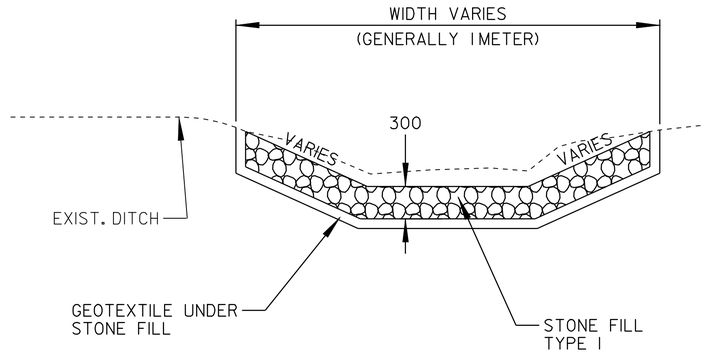

DITCH DETAIL

NOT TO SCALE

NOTES:

PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2 AND 5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

THIS SHEET NOT USED FOR RECORD PLANS.

VAOT Metric

DITCH CLEANING DETAIL SHEET

PROJECT : BARTON-IRASBURG

PROJECT NO.: STP 2107(I)S

DESIGN FILE NAME: pave/98c096/pc096.dgn
IPARM FILE NAME: pc096d101.i
SURVEYED BY: CLD ENGINEERS INC
SQUAD LEADER: WRH

PLOT DATE: 21-MAY-2007 13
SURVEY DATE: 6/99
DRAWN BY: MPS
SHEET: 11 OF 49