LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			653.20	613.10	649.31	
SITE	STATION	STATION	POS.	0-2.5	>2.5		TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m2	m3	m2	
VT. ROUTE 142 (VERNON)										
1	0+032	0+306	LT.	274			274			
2	0+724	0+885	LT.	161			161			
3	1+677	1+770	LT.	93			93			
4	1+683	1+770	RT.	87			87			
5	2+173	2+655	LT.	482			482			
6	2+768	3+122	LT.	354			354			
7	3+428	3+524	LT.		96			29	96	
8	4+966	5+058	RT.	92			92			
9	5+311	5+440	RT.	129			129			
10	5+520	5+633	LT.	113			113			
11	6+067	6+437	LT.		370			113	370	
12	6+437	7+306	LT.	869			869			
13	7+178	7+306	RT.		128			39	128	
14	9+045	9+109	LT.	64			64			
15	9+640	9+720	RT.	80			80			
16	10+252	10+702	LT.	450			450			
17	12+262	12+392	LT.	130			130			
18	12+392	13+116	LT.		724			221	724	
19	13+390	13+679	LT.		289			88	289	
20	13+840	13+953	LT.	113			113			
VT. ROUTE 142 (BRATTLEBORO)										
21	0+426	1+159	LT.		733			223	733	
22	1+352	1+609	LT.	257			257			
23										
24										
25										
26										
SUBTOTAL				3748	2340		3748	713	2340	
ROUNDING				12	10		2	12	10	
TOTAL				3750	2350		3750	725	2350	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			653.20	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m2	m3	m2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			653.20	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m2	m3	m2	

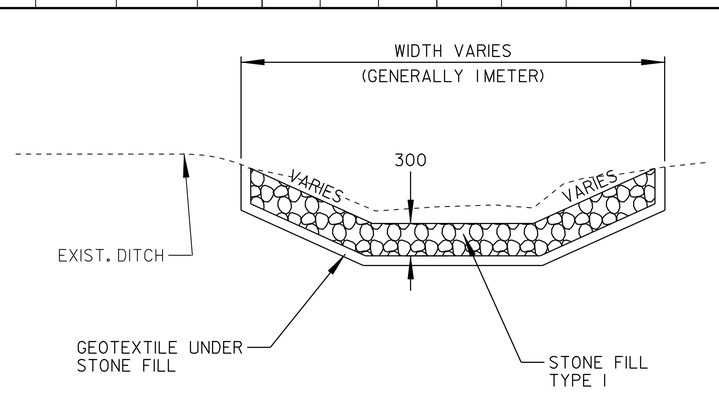

DITCH DETAIL

NOT TO SCALE

NOTES:

PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS INDICATED ON THIS SHEET OR AS DIRECTED BY THE ENGINEER. PAYMENT WILL BE UNDER APPLICABLE EQUIPMENT RENTAL ITEM(S).

AN ESTIMATED QUANTITY OF TEMPORARY EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. TEMPORARY EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 0 AND 2.5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 2.5 PERCENT OR AS DIRECTED BY THE ENGINEER.

VAOT Metric

DITCH CLEANING DETAIL SHEET

PROJECT NAME : **VERNON - BRATTLEBORO**

PROJECT NO. : **AC STP 2126(1)S**

DESIGN FILE NAME: /pave/98cl84/pcl84.dgn
IPARM FILE NAME: pcl84ds.i
SURVEYED BY: WILDER/LOCKE
SQUAD LEADER:

PLOT DATE: 08-SEP-2009
SURVEY DATE:
DRAWN BY: WILDER
SHEET: 11 OF 33