LOCATION				FEET OF DITCHING		MISC. ITEMS			REMARKS
						654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE		EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-2.5	> 2.5	SY	CY	SY	
U.S. ROUTE 7									
TOWN OF CLARENDON									
1	0+00	1+48	LT	148		49			
2	106+29		RT		25		3	14	
3	118+80		LT-RT		25		3	14	CLEAN 18" CULVERT INLET AND OUTLET
4	134+38		RT	100		33			
5	139+92		LT-RT		25		3	14	CLEAN INLET & OULET
6	146+26		RT		10		1	6	CLEAN 18" CULVERT INLET
7	203+55		RT		10		1	6	CLEAN OUTLET DITCH
8	211+20		RT		10		1	6	CLEAN OUTLET DITCH
9	241+30		RT		10		1	6	CLEAN OUTLET DITCH
10	259+72		RT		10		1	6	CLEAN OUTLET DITCH
11	264+53		RT		10		1	6	CLEAN OUTLET DITCH
ROUNDING						3	5	2	
TOTALS				248	135	85	20	80	

LOCATION				FEET OF DITCHING		MISC. ITEMS			REMARKS
						654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE		EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-2.5	> 2.5	SY	CY	SY	

LOCATION				FEET OF DITCHING		MISC. ITEMS			REMARKS
						654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE		EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-2.5	> 2.5	SY	CY	SY	

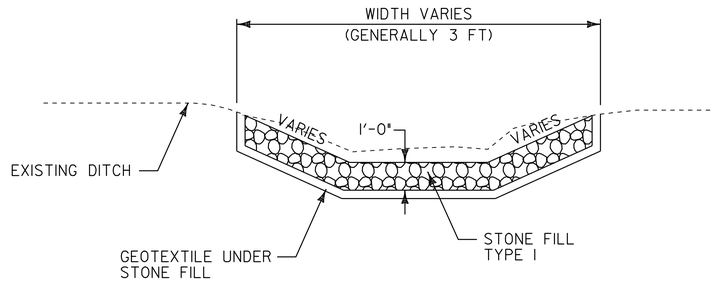

DITCH DETAIL
N.T.S.

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 0 AND 2.5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 2.5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT NAME: WALLINGFORD - RUTLAND TOWN
PROJECT NUMBER: AC NH 2207(1)S

FILE NAME: p99b166.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: D.W.E.
PLOT DATE: 12-MAR-2007 11:27
DRAWN BY: C.A.K.
CHECKED BY: D.E.G.
SHEET 12 OF 95