LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
							653.20	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10	SY	CY	SY	
U.S. ROUTE 2 DANVILLE										
1	101+75	102+15	RT		40		18			
2	101+90	102+15	LT		25		11			
3	130+60	136+60	LT			600		89	267	
4*	138+25	139+25	LT	100						
5	139+40	141+40	LT	200						
6	164+40	165+40	RT		100		45			
7	181+75		LT	10						CLEAR COVER OF OVERGROWTH AROUND GRATE
8	189+86		RT	10						CLEAR COVER OF OVERGROWTH AROUND GRATE
9	197+00	203+00	RT		600		267			
		SUBTOTAL		320	765	600	341	89	267	
		ROUNDING		-	-	-	9	11	33	
		TOTAL		320	765	600	350	100	300	

* A PLANT SPECIES OF SPECIAL CONCERN (SEDGE) IS LOCATED WITHIN THE DITCH TO THE WEST OF THE DISTRICT GARAGE. DITCHING AT THIS LOCATION SHALL INCLUDE ONLY THE CLEANING OF THE EXISTING DITCH. THE DITCH WILL NOT BE WIDENED OR MODIFIED IN ANY WAY, EXCEPT FOR THE CLEANING. EQUIPMENT FOR DITCHING AT THIS LOCATION SHALL BE LOCATED ON THE ROADWAY SIDE OF THE DITCH AND SHALL NOT BE LOCATED ON THE NORTH SIDE OF THE DITCH. THE RESIDENT ENGINEER SHALL NOTIFY BOB POPP, VANR NON-GAME AND NATURAL HERITAGE PROGRAM, AT 802-476-0127 PRIOR TO DITCHING AT THIS LOCATION.

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
							653.20	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10	SY	CY	SY	

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
							653.20	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			TEMP. EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10	SY	CY	SY	

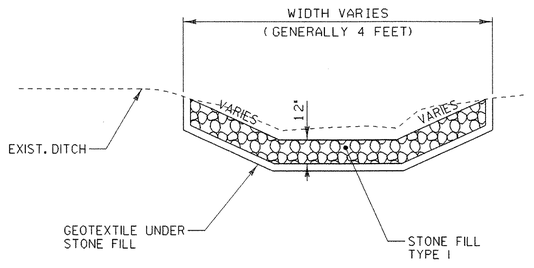

DITCH DETAIL

NOT TO SCALE

NOTES:

1. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING, SEED AND STONE FILL TYPE I HAVE BEEN INCLUDED. DITCHES WITH A GRADE LESS THAN 1 PERCENT SHALL BE SEEDED. TEMPORARY EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2.5 PERCENT. STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 2.5 PERCENT, OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT NAME: DANVILLE
PROJECT NUMBER: NH 2205 (1)S

FILE NAME: pave/99b162/99b162 — PLOT DATE: 12-JAN-2007
PROJECT LEADER: EPD — DRAWN BY: SJB
DESIGNED BY: JDA — CHECKED BY: EPD
PLOT FILE: 99B162DIT.I — SHEET 12 OF 63