LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							613.10	649.31	654.10	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL TYP. I	GEOT. UNDER STONE FILL	EROS. MATT.	
				0-1	1-2.5	2.5-10				
VT ROUTE 15, UNDERHILL-CAMBRIDGE							m^3	m^2	m^2	
DISTRICT #8										
	UNDERHILL									
1	7+077.9	7+327.3	LT			249	75	249		
	WESTFORD									
2	0+593.8	0+774.1	LT		180					BITUMINOUS GUTTER 3.0M - 3.6M WIDE +/-
3	0+967.2	1+142.6	RT		175				175	
4	1+899.0	2+319.1	RT			420	126	420		
5	2+768.1	2+834.1	RT		66				66	
6	3+621.0	3+778.7	RT			158	47	158		
	CAMBRIDGE									
7	0+664.7	2+132.4	RT			1468	440	1468		INTERMITTING-60% +/-
8	2+478.4	2+639.3	LT			161	48	161		REPAIR SLOPE AT STA. 2+400 TO STA. 2+560, LT.
9	2+478.4	2+639.3	RT			161	48	161		
10	2+864.6	2+908.1	LT			43	13	43		
11	2+864.6	3+057.8	RT			193	58	193		
PROJECT SUBTOTALS (EST.)				421	2853	855	2853	241		
ROUNDING				-	-	15	47	4		
PROJECT TOTALS				421	2853	870	2900	245		

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							613.10	649.31	654.10	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL TYP. I	GEOT. UNDER STONE FILL	EROS. MATT.	
				0-1	1-2.5	2.5-10				
							m^3	m^2	m^2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							613.10	649.31	654.10	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL TYP. I	GEOT. UNDER STONE FILL	EROS. MATT.	
				0-1	1-2.5	2.5-10				
							m^3	m^2	m^2	

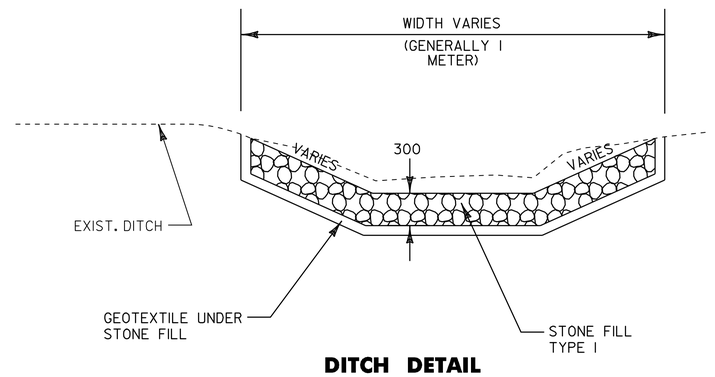

DITCH DETAIL

NOT TO SCALE

NOTES:

PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2 AND 5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

ARCHIVED IN DPR

Dufresne-Henry

DITCH CLEANING DETAIL SHEET

PROJECT NAME: UNDERHILL - - CAMBRIDGE

PROJECT NUMBER: STP 2212(I)S

FILE NAME: /pave/99bl76/pbl76.dgn PLOT DATE: 26-JAN-2006 11:0

PROJECT LEADER: JLL DRAWN BY: D-H

DESIGNED BY: D-H CHECKED BY:

IPARM FILE NAME: pbl76dd.i SHEET 6 OF 36