LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-2	2-5	>5				
VT ROUTE 100, DOVER				m	m	m	m2	m3	m2	
DISTRICT #1										
1	0+300	0+445	LT	145						ON LAYOUT SHEETS
2	0+815	0+900	LT	85						
3	0+925	0+980	LT		55		55			
4	1+515	1+575	RT		60		60			
5	1+900	2+088	RT	188						
6	4+420	4+460	LT		40		40			
		SUBTOTAL		418	155		155			
VT ROUTE 100, STRATTON										
DISTRICT #1										
7	0+095	0+630	RT			535		161	856	
8	0+346	0+410	LT			64		19	102	
9	0+422	0+507	LT			85		26	136	
10	0+678	0+740	LT		62		62			
11	0+800	0+860	RT	60						
12	0+870	0+945	LT			75		23	120	
13	0+875	0+975	RT			100		30	160	
14	0+975	1+000	RT			25		8	40	
15	1+020	1+552	RT			532		160	851	
16	1+159	1+175	LT			16		5	26	
17	1+305	1+360	LT			55		17	88	
18	1+696	1+706	LT			10		3	16	
		SUBTOTAL		60	62	1497	62	452	2395	
PROJECT SUBTOTALS				478	217	1497	217	452	2395	
ROUNDING				12	3	28	3	8	30	
PROJECT TOTALS				490	220	1525	220	460	2425	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-2	2-5	>5				
							m2	m3	m2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-2	2-5	>5				
							m2	m3	m2	

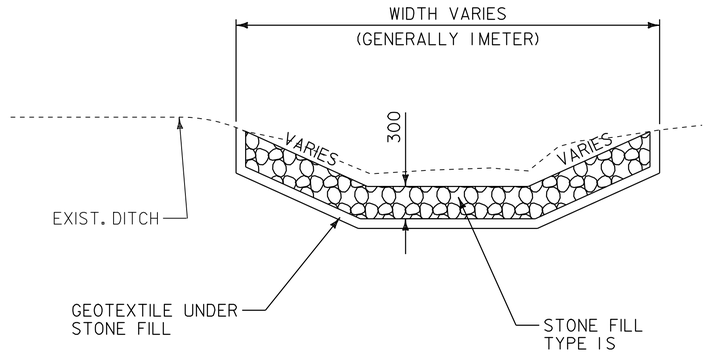

DITCH DETAIL

NOT TO SCALE

NOTES:

PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2 AND 5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

VAOT Metric

DITCH CLEANING DETAIL SHEET

PROJECT : DOVER-STRATTON

PROJECT NO. : STP 2214(I)S

DESIGN FILE NAME: /pave/99bl80/pbl80.dgn

IPARM FILE NAME: pbl80dc.i PLOT DATE: 24-MAY-2007

SURVEYED BY: CLD ENGINEERS, Inc SURVEY DATE: 5/00

SQUAD LEADER: WRH DRAWN BY: PTS

SHEET: 9 OF 49