VTrans Metric

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
VERMONT ROUTE 313							m^2	m^3	m^2	
ARLINGTON:										
1	10+940.0	11+039.0	RT	99						
2	11+000.0	11+350.0	LT	350						
3	11+161.0	11+274.0	RT	113						
4	12+340.0	12+723.0	RT	383						
5	12+594.0	12+723.0	LT	129						
SUNDERLAND:										
6	0+000.0	0+100.0	LT	100						
7	0+000.0	0+200.0	RT	200						
SUBTOTAL				1374						
ROUNDING				76						
TOTAL				1450						

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	

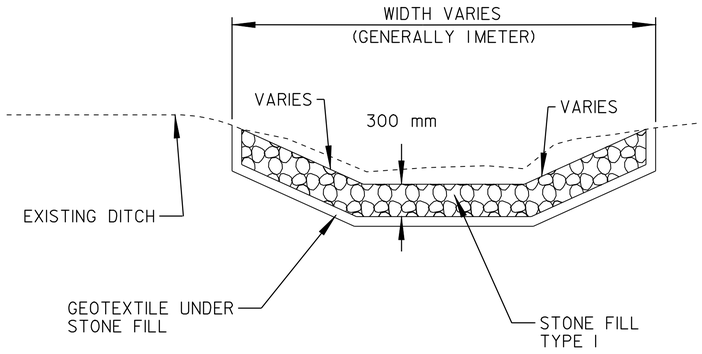

DITCH DETAIL

NOT TO SCALE

NOTES:

1. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2 AND 5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT: ARLINGTON - SUNDERLAND

PROJECT NO.: STP 2223(1)S

DESIGN FILE NAME: /pave/98b134/pb198.dgn
IPARM FILE NAME: pb198dc.i
SURVEYED BY: N/A
SQUAD LEADER: T.P.K.

PLOT DATE: 17-APR-2007 10
SURVEY DATE: N/A
DRAWN BY: C.A.K.
SHEET: 7 OF 16