


646.40 DURABLE 100 mm WHITE LINE
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 SUNDERLAND:
 STA. 0+080.0 - STA. 0+620.0 LT & RT

646.41 DURABLE 100 mm YELLOW LINE
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED
 SUNDERLAND:
 STA. 0+080.0 - STA. 0+258.0 S - D
 STA. 0+258.0 - STA. 0+515.0 - D -
 STA. 0+515.0 - STA. 0+620.0 D - S

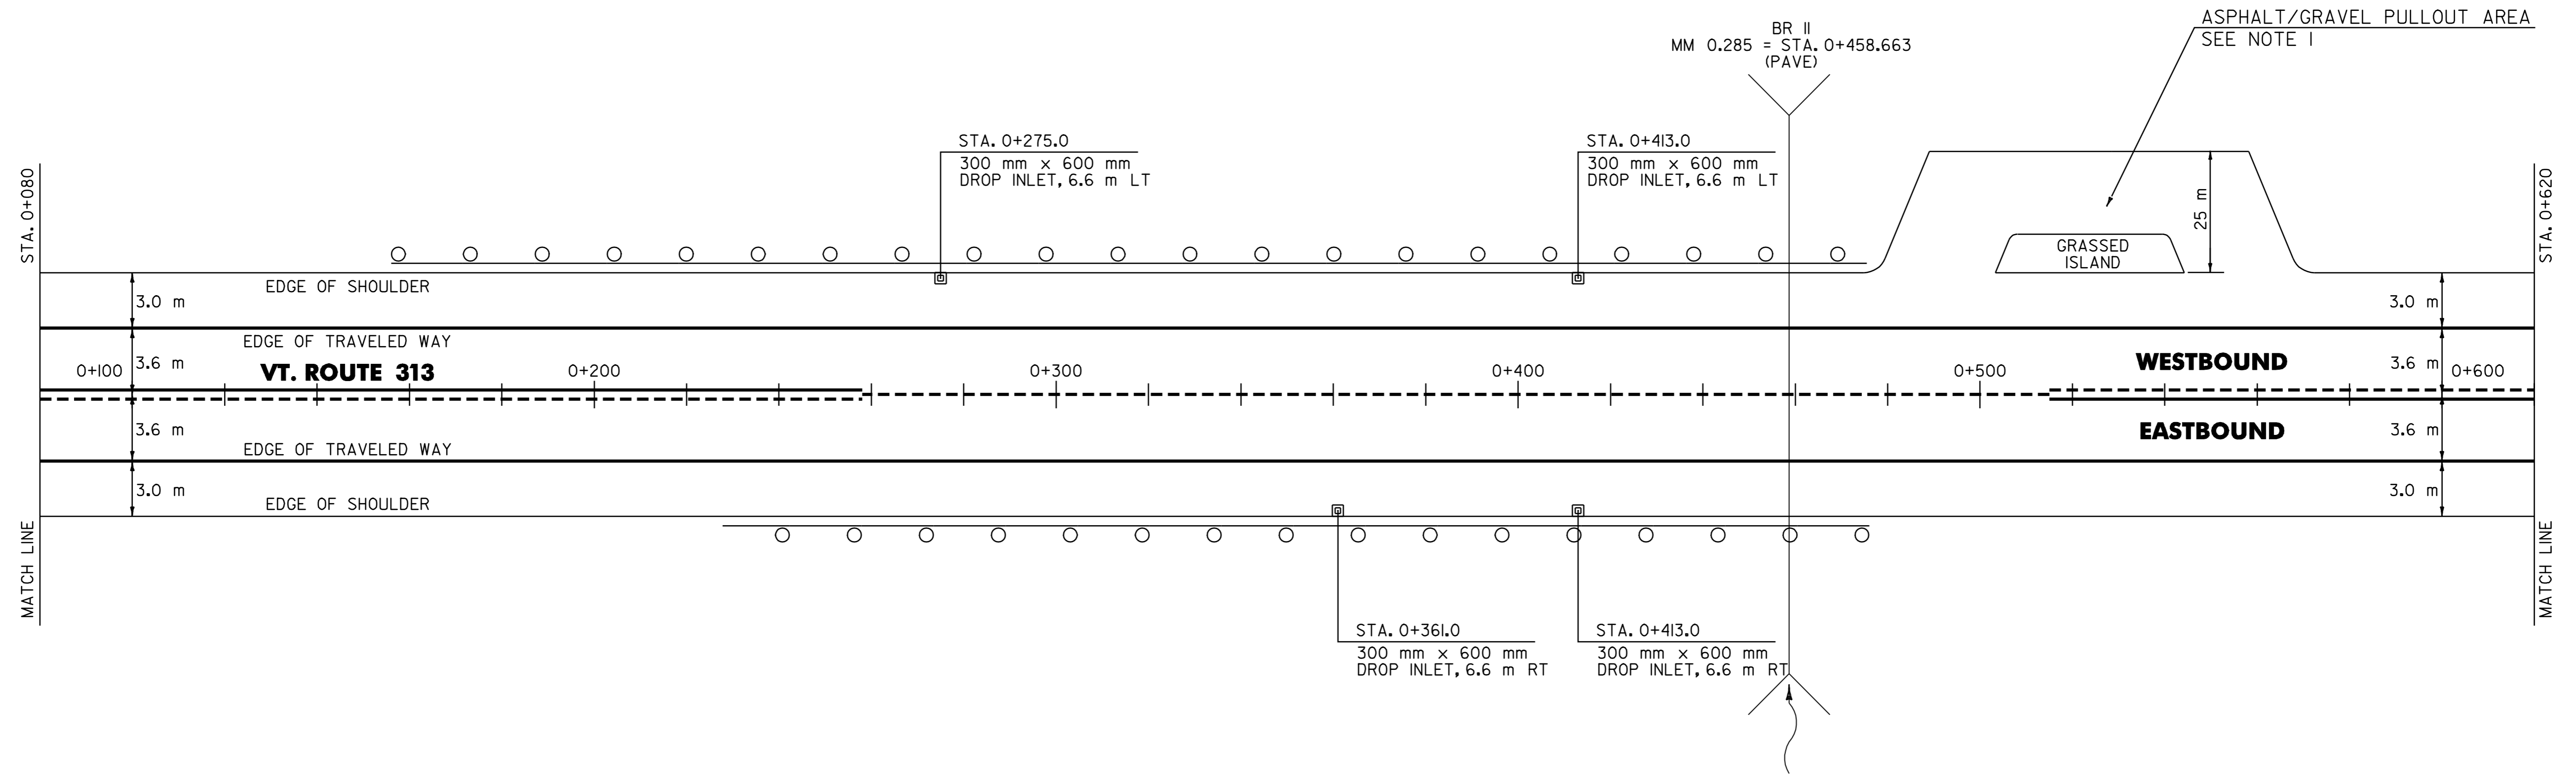

NOTE:

I. PAVE THE ENTIRE PULLOUT AREA WITH TWO 25 mm LIFTS OF TYPE IV MEDIUM DUTY BITUMINOUS CONCRETE PAVEMENT. PLACE 75 mm OF ITEM 301.28 SUBBASE OF CRUSHED GRAVEL (FINE GRADED) ON THE EXISTING GRAVEL SURFACES PRIOR TO PAVING. ANY REQUIRED EXCAVATION SHALL BE PERFORMED AS DIRECTED BY THE RESIDENT ENGINEER AND PAID UNDER ITEM 608.25.

301.28 SUBBASE OF CRUSHED GRAVEL (FINE GRADED)

SUNDERLAND:
 STA. 0+480.0 - STA. 0+565.0 LT (105 m³)

604.42 CHANGE ELEVATION OF DI, CB OR MH

SUNDERLAND:
 STA. 0+275.0 LT
 STA. 0+361.0 RT
 STA. 0+413.0 LT
 STA. 0+413.0 RT

616.35 TREATED TIMBER CURB

SUNDERLAND:
 STA. 0+205.0 - STA. 0+415.0 LT (210 m)
 STA. 0+291.0 - STA. 0+416.0 RT (125 m)

621.20 STEEL BEAM GUARDRAIL

SUNDERLAND:
 STA. 0+162.2 - STA. 0+458.6 LT (296.4 m)
 STA. 0+234.1 - STA. 0+465.9 RT (231.8 m)

621.505 MANUFACTURED TERMINAL SECTION

SUNDERLAND:
 STA. 0+162.2 LT
 STA. 0+234.1 RT
 STA. 0+458.6 LT
 STA. 0+465.9 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL

SUNDERLAND:
 STA. 0+153.0 - STA. 0+470.0 LT (317 m)
 STA. 0+224.0 - STA. 0+476.0 RT (252 m)

DATUM	
VERTICAL	N/A
HORIZONTAL	N/A

**PAVING
 PROJECT
 LAYOUT
 # 5**

SURVEYED BY	N/A	DATE	N/A
DRAWN BY	C.A.K.	DATE	2/01
SQUAD LEADER	T.P.K.		
DESIGN FILE NO.	/pave/99b198/pb198.dgn		
IPARM FILE	pb198105.i	DATE PLOTTED	7-APR-2007 10:4
PROJ. NAME	ARLINGTON - SUNDERLAND		
PROJ. NO.	STP 2223(I)S		
SHEET	12 OF 16	SHEETS	