

GEOTEXTILE FOR SILT FENCE
 STA. 33+80 TO 34+92, LT.
 STA. 34+99 TO 36+22, LT.
 STA. 36+27 TO 37+50, LT.
 STA. 2+10 TO 2+34, RT.
 STA. 2+79 TO 3+32, RT.
 STA. 3+66 TO 5+08, RT.

EROSION MATTING
 STA. 0+13 TO 3+44, RT.
 STA. 0+25 TO 5+97, LT.
 STA. 20+20 TO 24+69, RT.

GEOTEXTILE FOR SILT FENCE (INLET PROTECTION)
 STA. 2+74, RT.
 STA. 21+45, RT.

STONE OUTLET PROTECTION
 STA. 37+48 TO 37+49, LT.
 STA. 37+74 TO 37+82, LT.

STONE LINED PILOT CHANNEL
 STA. 34+15 TO 35+62, LT.

STONE CHECK DAMS
 STA. 35+64, LT.
 STA. 36+63, LT.
 STA. 1+00, RT.
 STA. 1+87, RT.

SNOW FENCE (MOD.-PDF)
 STA. 38+58, RT. TO 40+50, LT. (507')
 STA. 3+88, RT. TO 32+06, LT. (1033')


SNOW FENCE (MOD.-ARCH)
 STA. 2+43, RT. TO 3+88, LT. (147')
 STA. 35+65, RT. TO 38+55, LT. (466')

- NOTES:**
1. PLACE CONSTRUCTION FENCE OUTSIDE LIMITS OF CONSTRUCTION.
 2. CONSTRUCTION FENCE TO BE PAID FOR UNDER 620.70 - SNOW FENCE (MOD.-PDF) OR (MOD.-ARCH)
 3. CONSTRUCTION FENCE SHALL BE PLACED IN A MANNER TO PROTECT WETLANDS FROM CONSTRUCTION ACTIVITIES.
 4. ALL DRAINAGE PIPES CONSTRUCTED IN PHASE 1 SHALL BE TERMINATED AND CAPPED PRIOR TO BEGINNING PHASE 2 CONSTRUCTION.


MATCHLINE - SEE EPSC PLAN 3

EROSION CONTROL LEGEND

- EROSION MATTING
- STONE LINED PILOT CHANNEL
- SILT FENCE
- CULVERT INLET PROTECTION
- ROCK BARRIER INLET PROTECTION
- STONE CHECK DAMS
- STONE OUTLET PROTECTION
- VEHICLE TRACKING PAD
- SNOW FENCE (MOD.-PDF)
- SNOW FENCE (MOD.-ARCH)

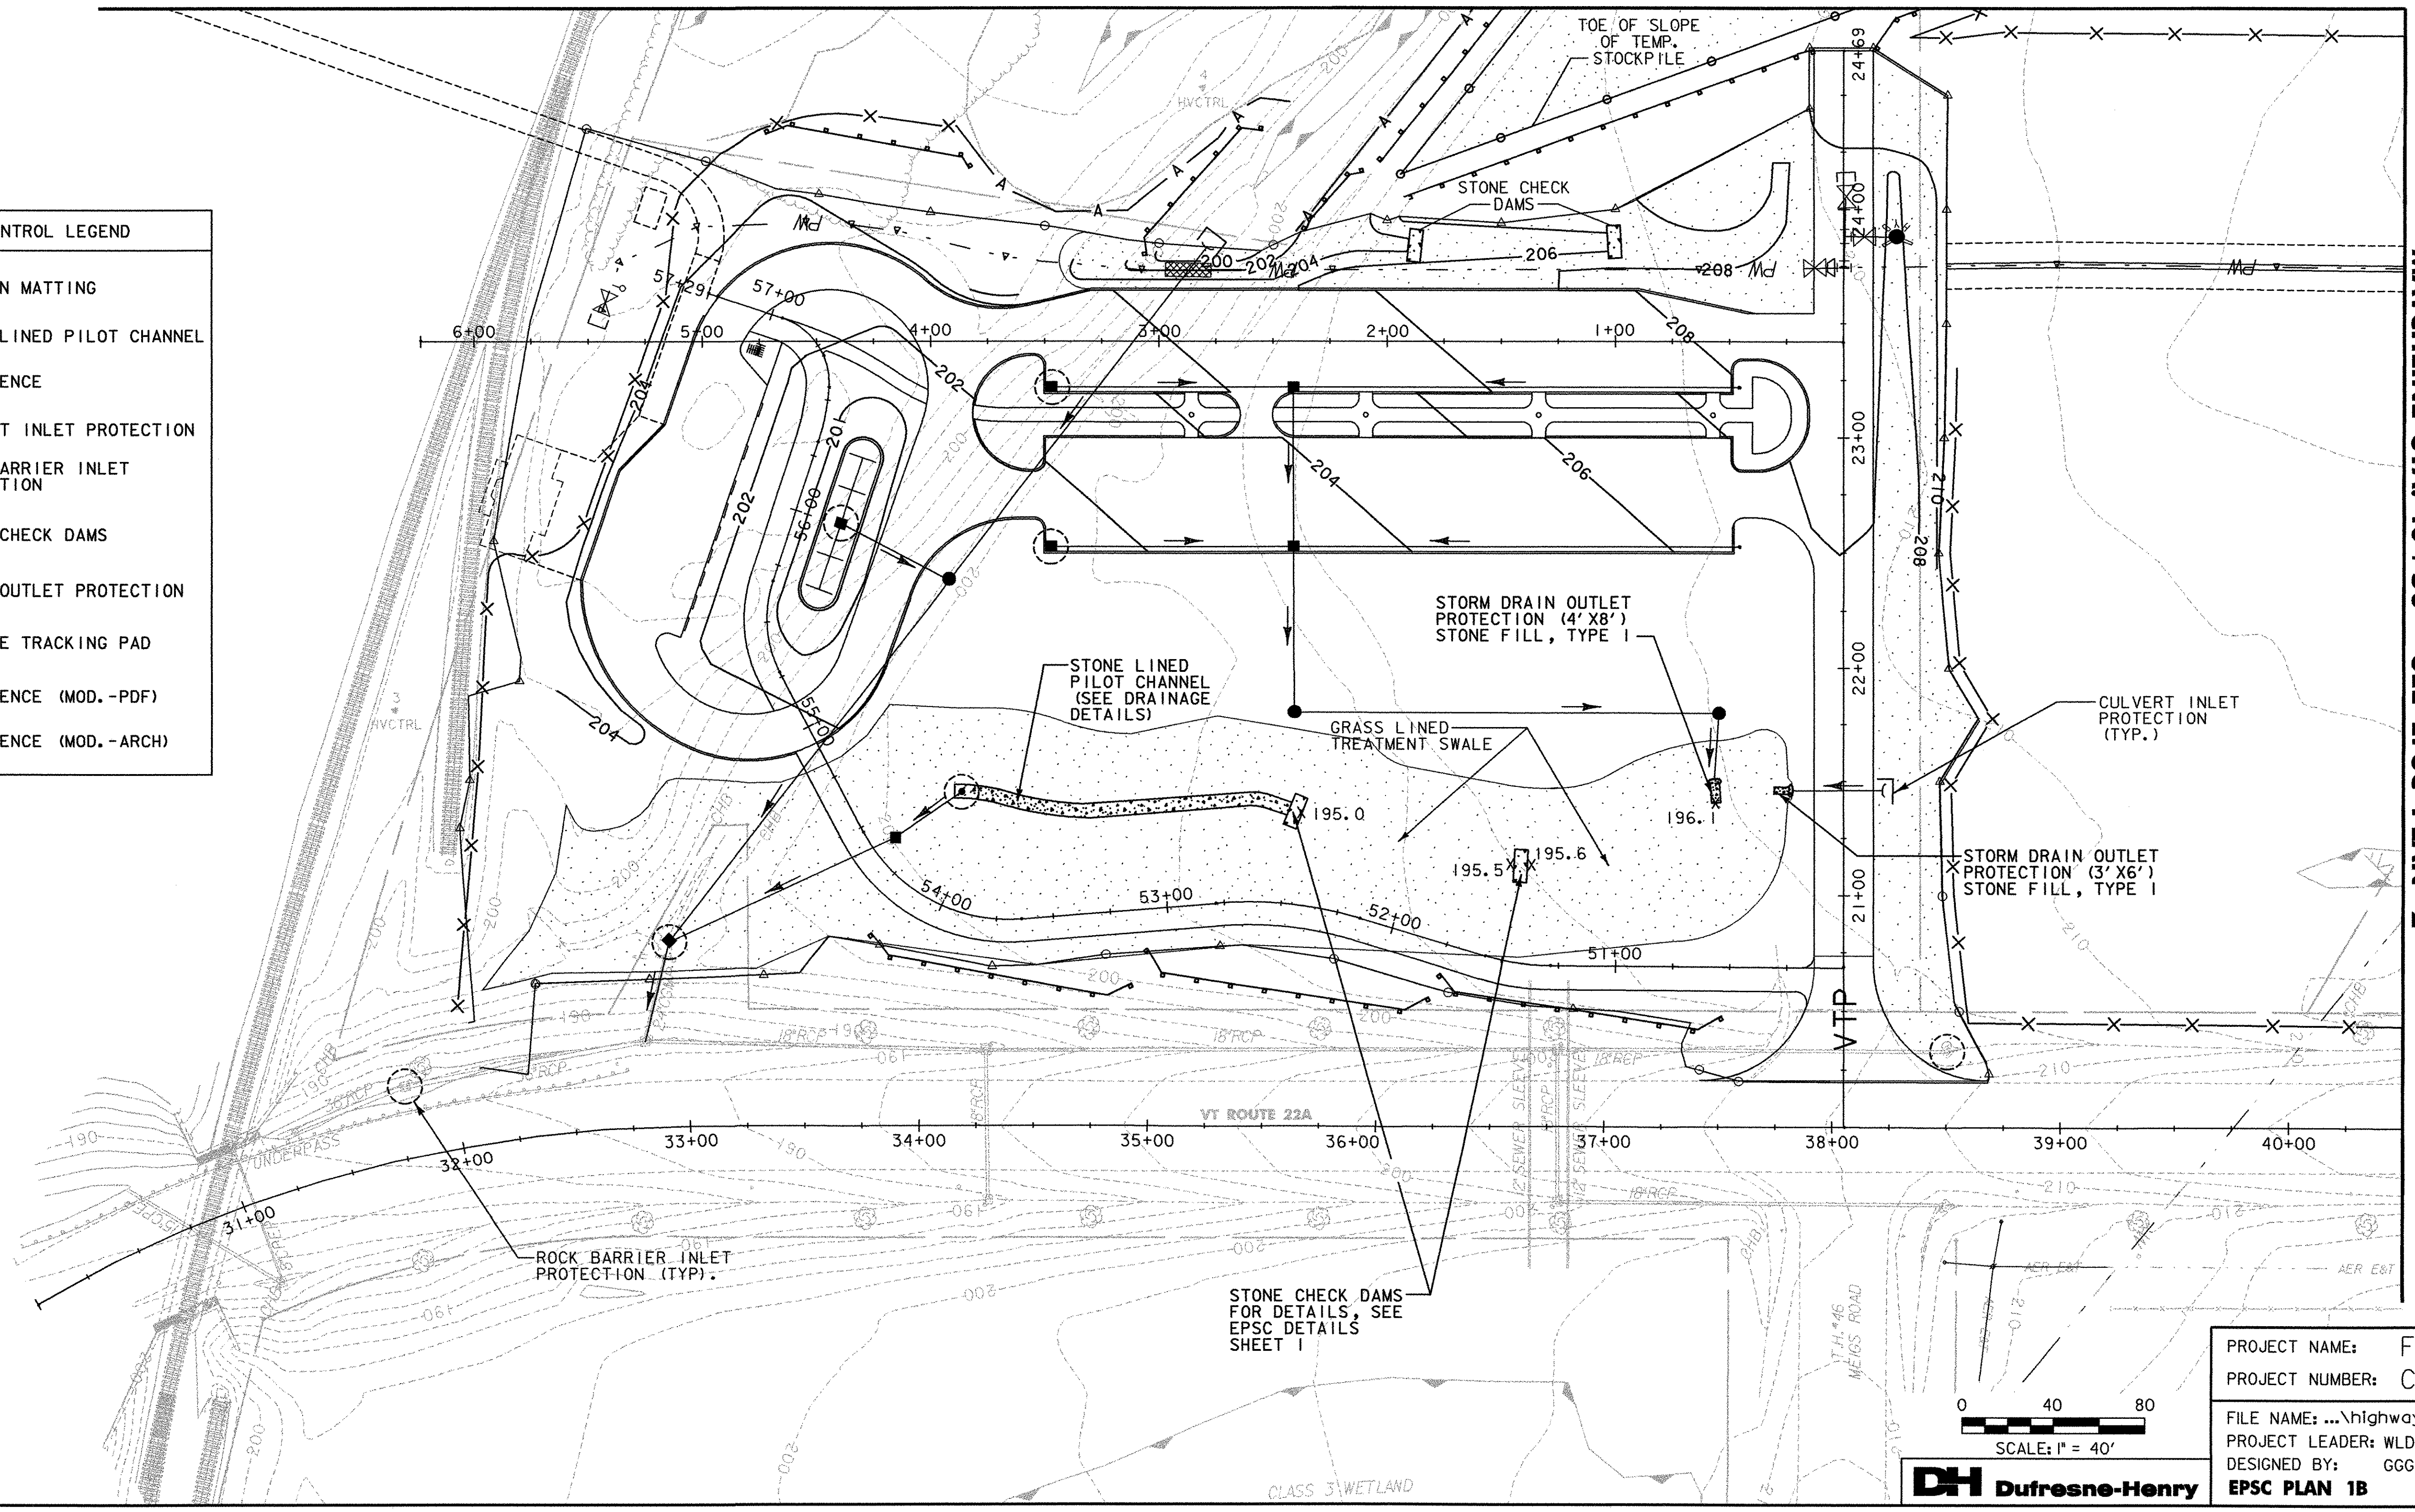

MATCHLINE STA. 40+50 - SEE EPSC PLAN 2

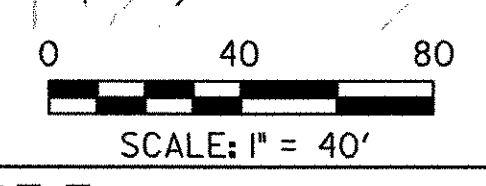

PROJECT NAME: FERRISBURGH/VERGS-FERRISBURGH
 PROJECT NUMBER: CMG PARK (15)S/STP EH01(21)
 FILE NAME: ...\\highway\PlotFiles\59eps\cb.p PLOT DATE: 4/19/2006
 PROJECT LEADER: WLD DRAWN BY: MBL/SRZ
 DESIGNED BY: GGG CHECKED BY: GAS
EPSC PLAN 1B SHEET 59 OF 65