

QUANTITY SHEET



PRINCIPAL SPILLWAY OPTION # 3 WITHOUT EMERGENCY SPILLWAY

NO.	ITEM	UNIT	QUANTITY BREAKDOWN					TOTAL
			SPILLWAY		EROSION CONTROL		TRAFFIC CONTROL	
201.10	CLEARING & GRUBBING (INCL. INDIV. TREE & STUMPS)	LS	1.0					1
203.15	COMMON EXCAVATION (MOD)	CY	8650					8650
203.30	EARTH BORROW (MOD - BORROW SITE)	CY	2050					2050
203.32	GRANULAR BORROW (MOD - TOE DRAIN FILTER MATERIAL)	CY	378					378
208.40	COFFERDAM (MOD)	LS	1					1
301.25	SUBBASE OF CRUSHED GRAVEL (COARSE GRADED) (MOD.)	CY	25					25
301.26	SUBBASE OF CRUSHED GRAVEL (FINE GRADED)	CY	150					150
301.35	SUBBASE OF DENSE GRADED CRUSHED STONE (MOD.)	CY	25					25
401.10	AGGREGATE SURFACE COURSE	CY	90					90
501.25	CONCRETE, CLASS B (MOD - FLY ASH)	CY	152					152
507.15	REINFORCING STEEL	LB	28600					28600
529.15	REMOVAL OF STRUCTURE (MOD - PRINCIPAL SPILLWAY)	EA	1					1
601.0920	24" CPEP	LF	25					25
601.5824	24" CPEP ELBOW	EA	1					1
604.50	STEEL GRATE (MOD - TRASH RACK)	EA	1					1
605.10	6" UNDERDRAIN (MOD)	LF	75					75
605.90	UNDERDRAIN RISER	EA	1					1
605.95	UNDERDRAIN FLUSHING BASIN	EA	1					1
608.25	ALL PURPOSE EXCAVATOR RENTAL, TYPE I	HR			24			24
609.15	DUST AND ICE CONTROL WITH CALCIUM CHLORIDE	TON				1		1
613.10	STONE FILL, TYPE I	CY	190					190
613.11	STONE FILL, TYPE II	CY	100					100
620.70	SNOW FENCE (MOD)	LF	1120					1120
621.20	STEEL BEAM GUARDRAIL	LF	350					350
621.80	REMOVAL AND DISPOSAL OF GUARDRAIL	LF	350					350
621.90	TEMPORARY TRAFFIC BARRIER	LF				60		60
629.26	GATE VALVE (MOD - SLUICE GATE)	EA	1					1
631.10	FIELD OFFICE - ENGINEERS (MOD)	LS					1	1
631.16	TESTING EQUIPMENT - CONCRETE	LS					1	1
631.25	FIELD OFFICE - TELEPHONE (N.A.B.I.)	LU					1	1
635.10	MOBILIZATION	LS	1					1
641.10	TRAFFIC CONTROL	LS				1		1
649.31	GEOTEXTILE UNDER STONE FILL	SY	74					74
649.51	GEOTEXTILE FOR SILT FENCE	SY	480					480
651.15	SEED	LB	60					60
651.17	SEED - WINTER RYE	LB			60			60
651.18	FERTILIZER	LB	500					500
651.20	AGRICULTURAL LIMESTONE	TON			2			2
651.25	HAY MULCH	TON			2			2
651.26	HAY BALES FOR EROSION CONTROL (MOD - SAND BAGS)	EA			200			200
651.35	TOPSOIL	CY	270					270
652.10	EROSION & SEDIMENT CONTROL PLAN	LS			1			1
652.20	MONITORING EROSION & SEDIMENT CONTROL PLAN	HR			40			40
652.30	FIELD MAINTENANCE OF EROSION & SEDIMENT CONTROL PLAN (N.A.B.I.)	LU			1			1

DATUM
 VERTICAL ASSUMED
 HORIZONTAL NAD 83

PLOTTED 05/21/2003

NO.	DATE	REVISIONS	BY	CK'D

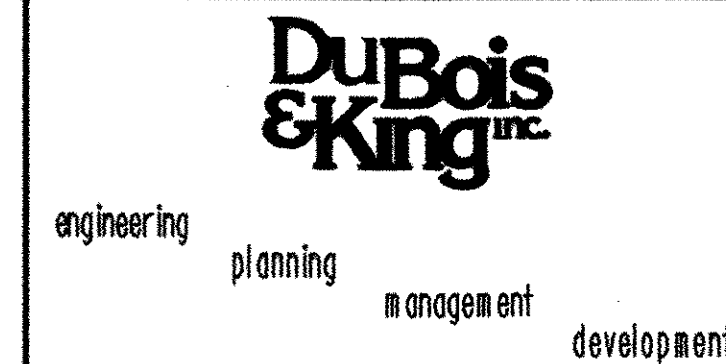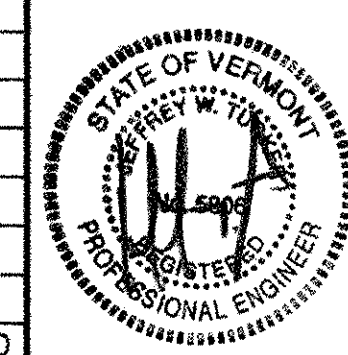

TOWN OF WARREN
 WARREN, VERMONT
 BLUEBERRY LAKE DAM
 REHABILITATION PROJECT
 QUANTITY SHEET

DRAWN BY SRP	DATE MAY 2003
CHECKED BY JWT	PROJ. NO. R16663
PROJ. ENG.	DRAW. NO. 1294
SHEET 5 OF 24	

L:\WORKSPACE\1\WORK\PROJECTS\WARREN\05/21/2003 11:05:32 AM