


# QUANTITY SHEET 1

SUMMARY OF ESTIMATED QUANTITIES										TOTALS		DESCRIPTIONS				DETAILED SUMMARY OF QUANTITIES			
							ROADWAY	EROSION CONTROL	BRIDGE	FULL C.E. ITEMS	GRAND TOTAL	FINAL	UNIT	ITEMS	ITEM NUMBER	ROUND	QUANTITIES	UNIT	ITEMS
							1				1		LS	CLEARING AND GRUBBING, INCLUDING INDIVIDUAL TREES AND STUMPS	201.10				
							0.2				0.2		ACRE	THINNING AND TRIMMING	201.30				
							60				60		CY	COMMON EXCAVATION	203.15				
							5				5		CY	SOLID ROCK EXCAVATION	203.16				
							20				20		CY	EXCAVATION OF SURFACES AND PAVEMENTS	203.28				
							20				20		CY	TRENCH EXCAVATION OF EARTH, EXPLORATORY (N.A.B.I.)	204.22				
									25		25		CY	STRUCTURE EXCAVATION	204.25				
									20		20		CY	GRANULAR BACKFILL FOR STRUCTURES	204.30				
							30				30		SY	COLD PLANING, BITUMINOUS PAVEMENT	210.10				
							10				10		CY	SUBBASE OF CRUSHED GRAVEL, FINE GRADED	301.26				
							7.5				7.5		CY	AGGREGATE SURFACE COURSE	401.10				
							1				1		LU	PRICE ADJUSTMENT, ASPHALT CEMENT (N.A.B.I.)	406.50				
									11		11		CY	CONCRETE, HIGH PERFORMANCE CLASS B	501.34				
									1		1		LS	SHORING SUPERSTRUCTURE	502.10				
									1		1		LS	STRUCTURAL STEEL	506.75				
									1630		1630		LB	REINFORCING STEEL, LEVEL I	507.11				
									50		50		LF	DRILLING AND GROUTING DOWELS	507.16				
									33		33		MFBM	STRUCTURAL LUMBER AND TIMBER, UNTREATED	522.20				
									3		3		MFBM	STRUCTURAL LUMBER AND TIMBER, TREATED	522.25				
									8.5		8.5		MFBM	NONSTRUCTURAL LUMBER, UNTREATED	522.30				
									90		90		LF	JOINT SEALER, POLYURETHANE	524.21				
									1		1		EACH	PARTIAL REMOVAL OF STRUCTURE	529.20				
									1		1		CY	REMOVAL OF CONCRETE OR MASONRY	529.25				
									25		25		SY	REPAIR OF CONCRETE SUBSTRUCTURE SURFACE, CLASS II	580.14				
									10		10		CY	DRY MASONRY	602.20				
									3		3		CY	REBUILT STONE MASONRY	602.35				
									52		52		SY	REPAIRING STONE MASONRY	602.40				
								22			22		HR	ALL PURPOSE EXCAVATOR RENTAL, TYPE I	608.25				
							15				15		CY	STONE FILL, TYPE II	613.11				
							50				50		CY	STONE FILL, TYPE III	613.12				
							2				2		EACH	ENERGY ABSORPTION ATTENUATOR, SAND-FILLED PLASTIC BARREL	621.57				
							100				100		LF	TEMPORARY TRAFFIC BARRIER	621.90				
							160				160		HR	UNIFORMED TRAFFIC OFFICERS	630.10				
										1	1		LS	FIELD OFFICE, ENGINEERS	631.10				
										1000	1000		DL	FIELD OFFICE TELEPHONE (N.A.B.I.)	631.26				
							1				1		LS	MOBILIZATION/DEMOBILIZATION	635.11				
							1				1		LS	TRAFFIC CONTROL	641.10				
							120				120		SY	GEOTEXTILE UNDER STONE FILL	649.31				
								65			65		SY	GEOTEXTILE FOR SILT FENCE, WOVEN WIRE REINFORCED	649.515				
								5			5		LB	SEED	651.15				

9/15/2015 10:54:28 AM C:\Users\m4256p\Documents\904225qty.dgn

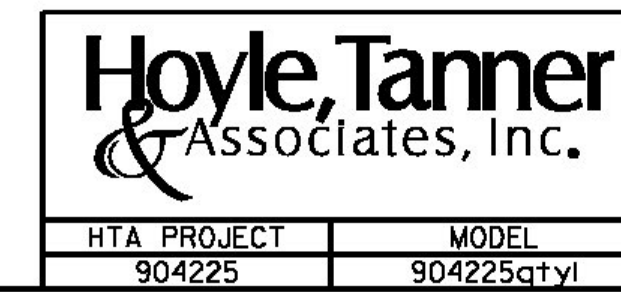

PROJECT NAME: TOWNSHEND  
PROJECT NUMBER: STP SCTT(I)  
FILE NAME: 904225qty.dgn  
PROJECT LEADER: M.D.SARGENT  
DESIGNED BY: J.C.RIPLEY  
**QUANTITY SHEET #1**

PLOT DATE: 8/13/2015  
DRAWN BY: T.A.GELINAS  
CHECKED BY: S.T.JAMES  
SHEET 9 OF 60