



SPLICING DETAIL

1. PLACE THE END POST OF ONE FENCE INSIDE THE END POST OF THE OTHER FENCE.
2. ROTATE BOTH POSTS AT LEAST 180 DEGREES IN A CLOCKWISE DIRECTION TO CREATE A TIGHT SEAL WITH THE FABRIC MATERIAL.
3. DRIVE BOTH POSTS 18 INCHES INTO THE GROUND AND BURY THE FLAP IN THE TRENCH.

POSTS @ 1.2 m SPACING (MAX)

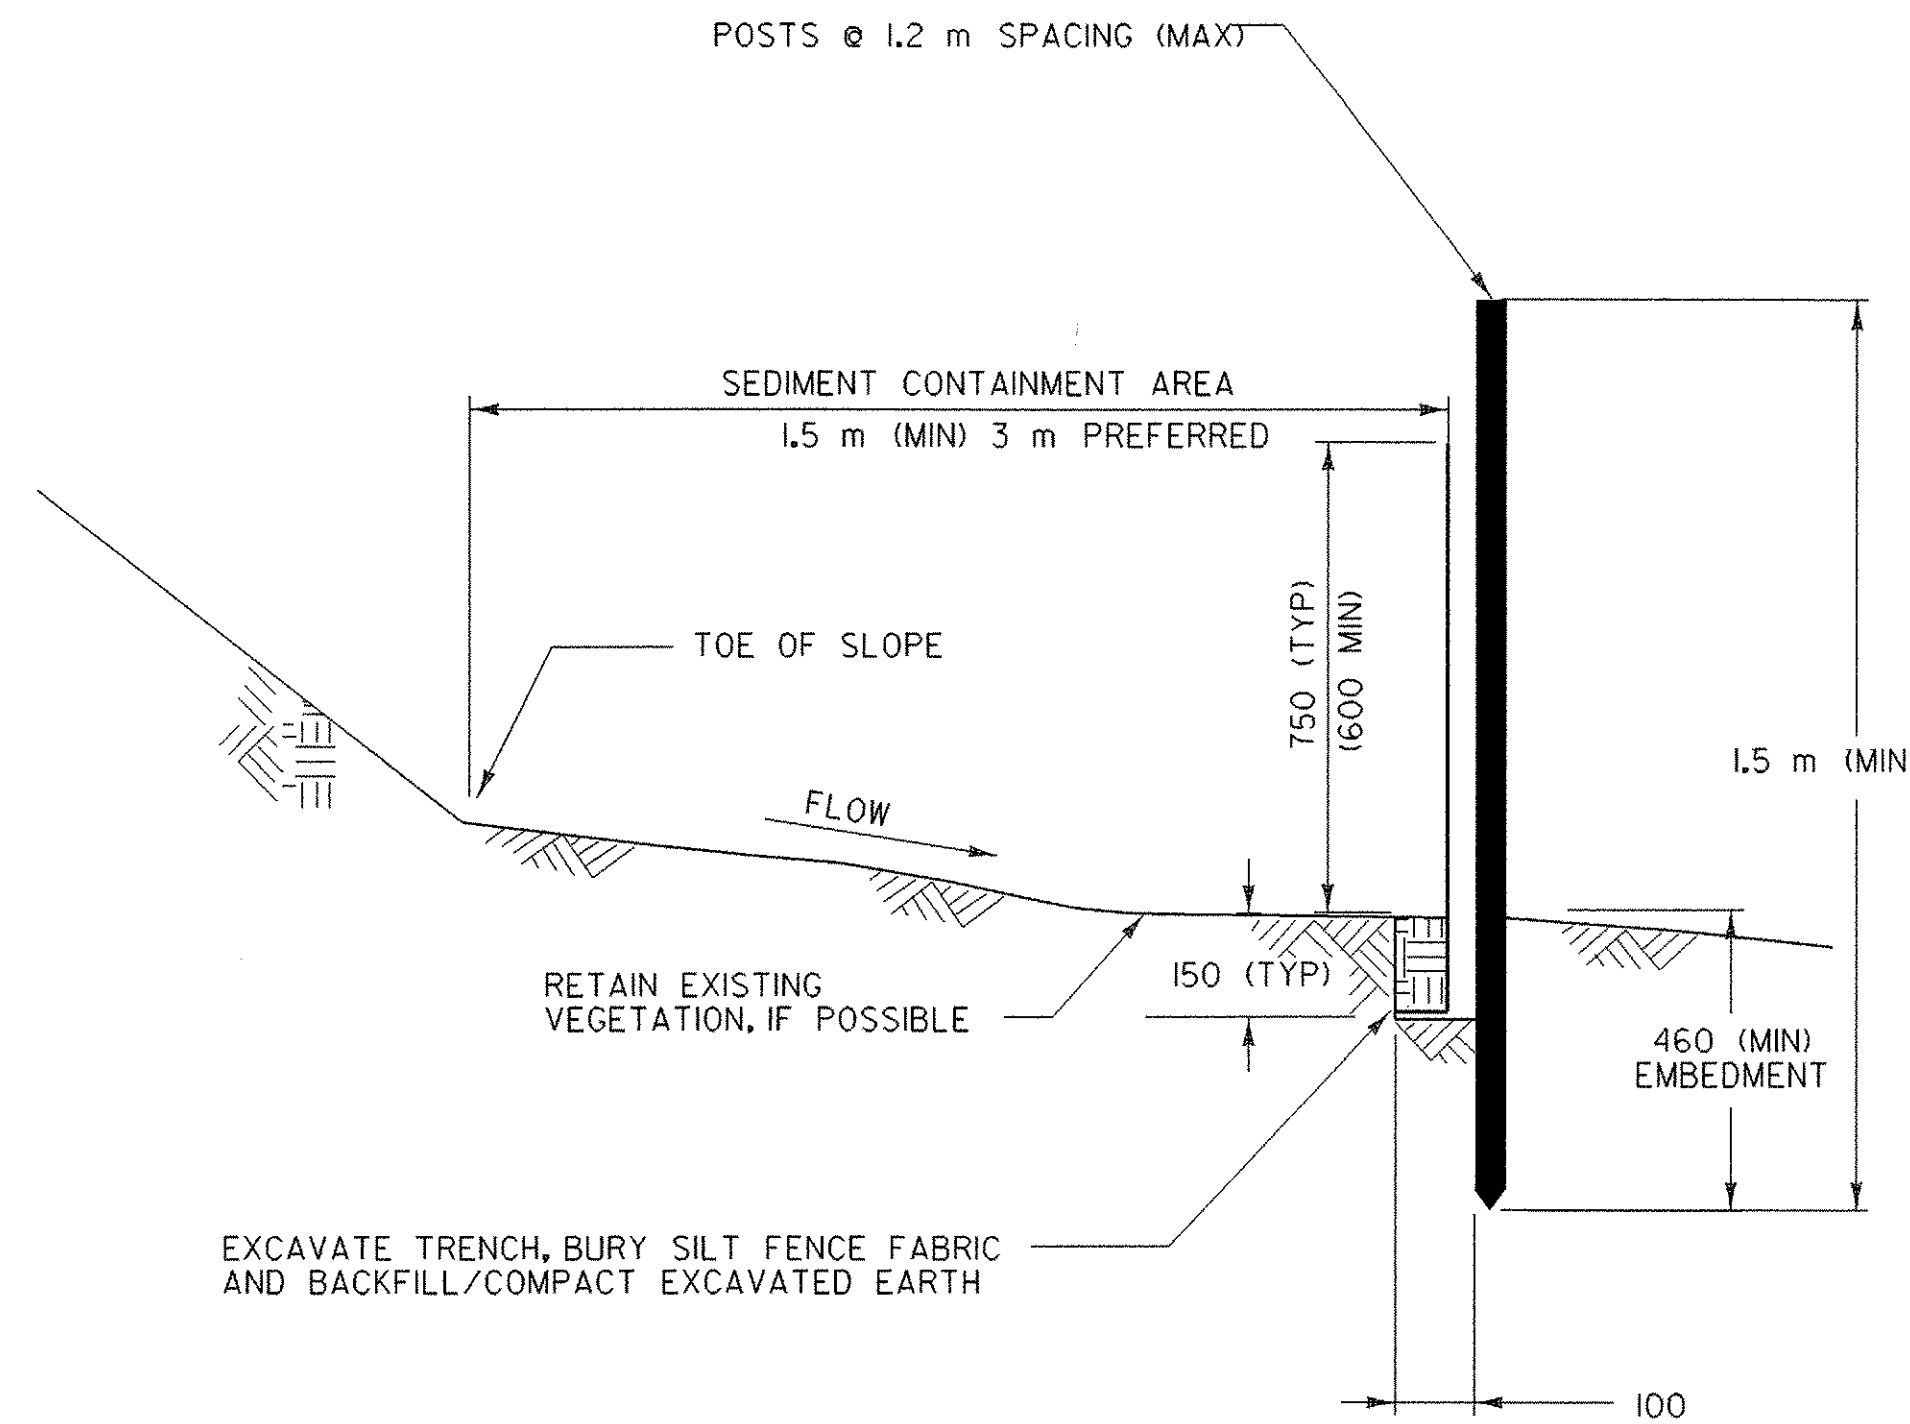


**DETAIL 'A'
TEMPORARY SILT FENCE**
N.T.S.

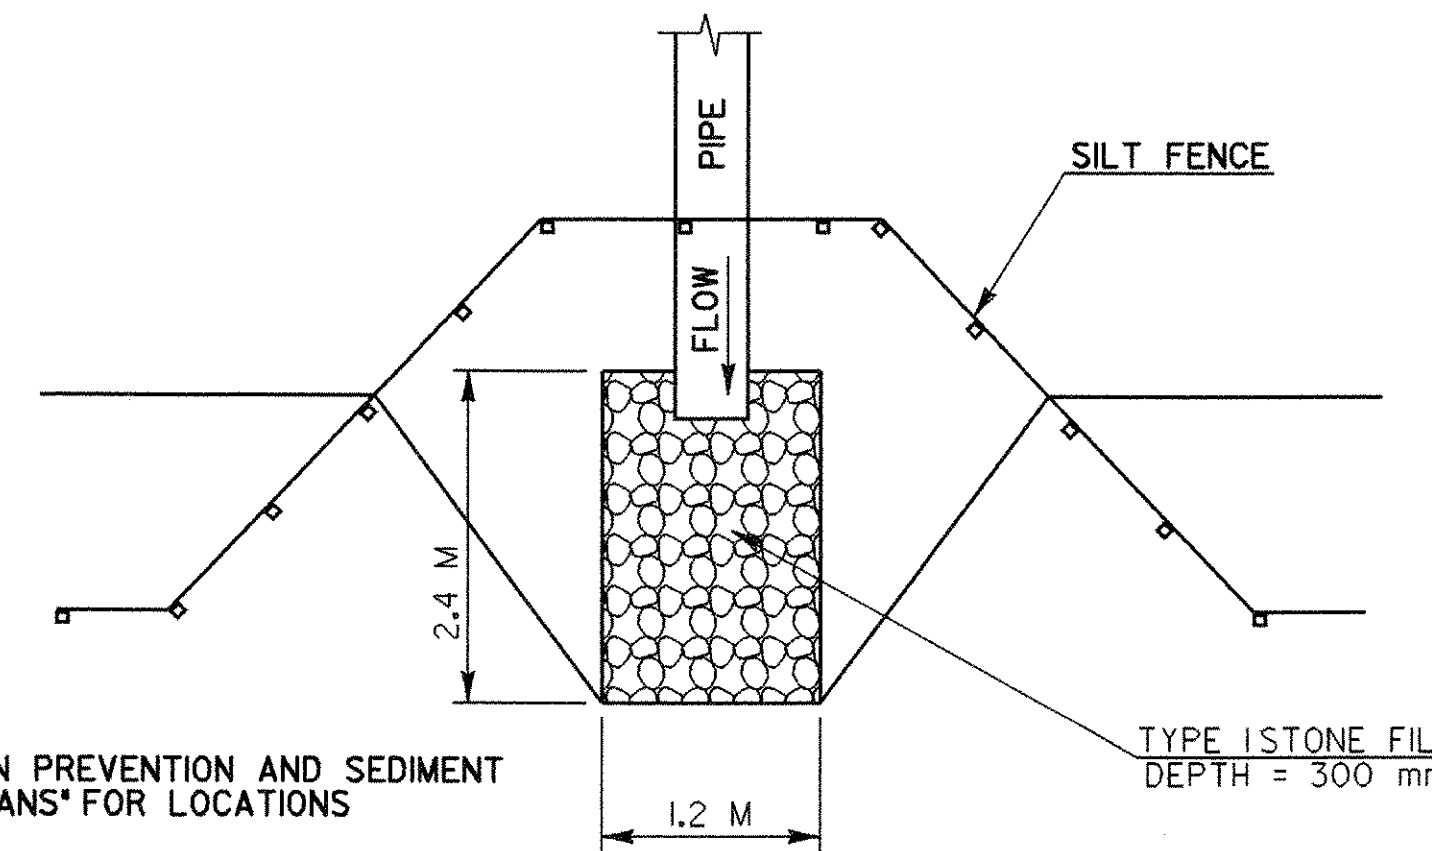

NOTES

1. SEE 'EROSION PREVENTION AND SEDIMENT CONTROL PLANS' FOR LOCATIONS
2. ALL TEMPORARY PADS TO BE SIZED AS DESCRIBED ABOVE
3. GEOTEXTILE UNDER STONE FILL SHALL BE PLACED UNDER THE STONE PADS.


**DETAIL 'E'
EXISTING PIPE OUTLET CONTROL**
N.T.S.

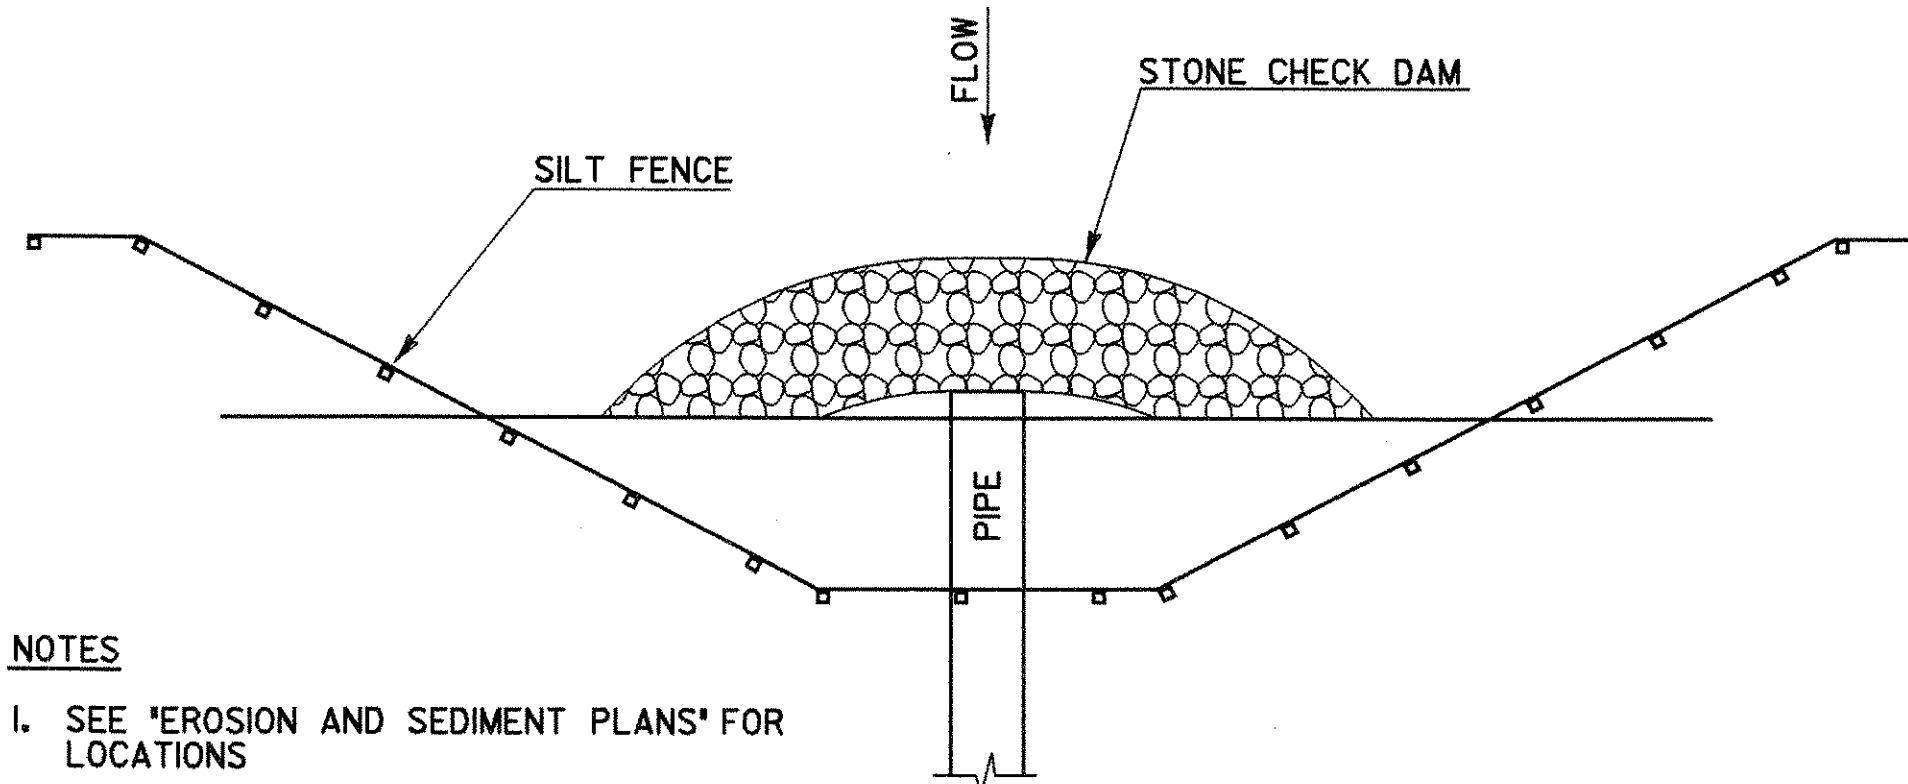

NOTES

1. SEE 'EROSION AND SEDIMENT PLANS' FOR LOCATIONS
2. ROCK CHECK DAM SHALL BE SIZED TO CREATE 600mm PONDING OF STORMWATER BEFORE ENTERING PIPE.
3. GEOTEXTILE UNDER STONE FILL SHALL BE PLACED UNDER THE STONE PADS.


**DETAIL 'G'
EXISTING PIPE INLET CONTROL**
N.T.S.

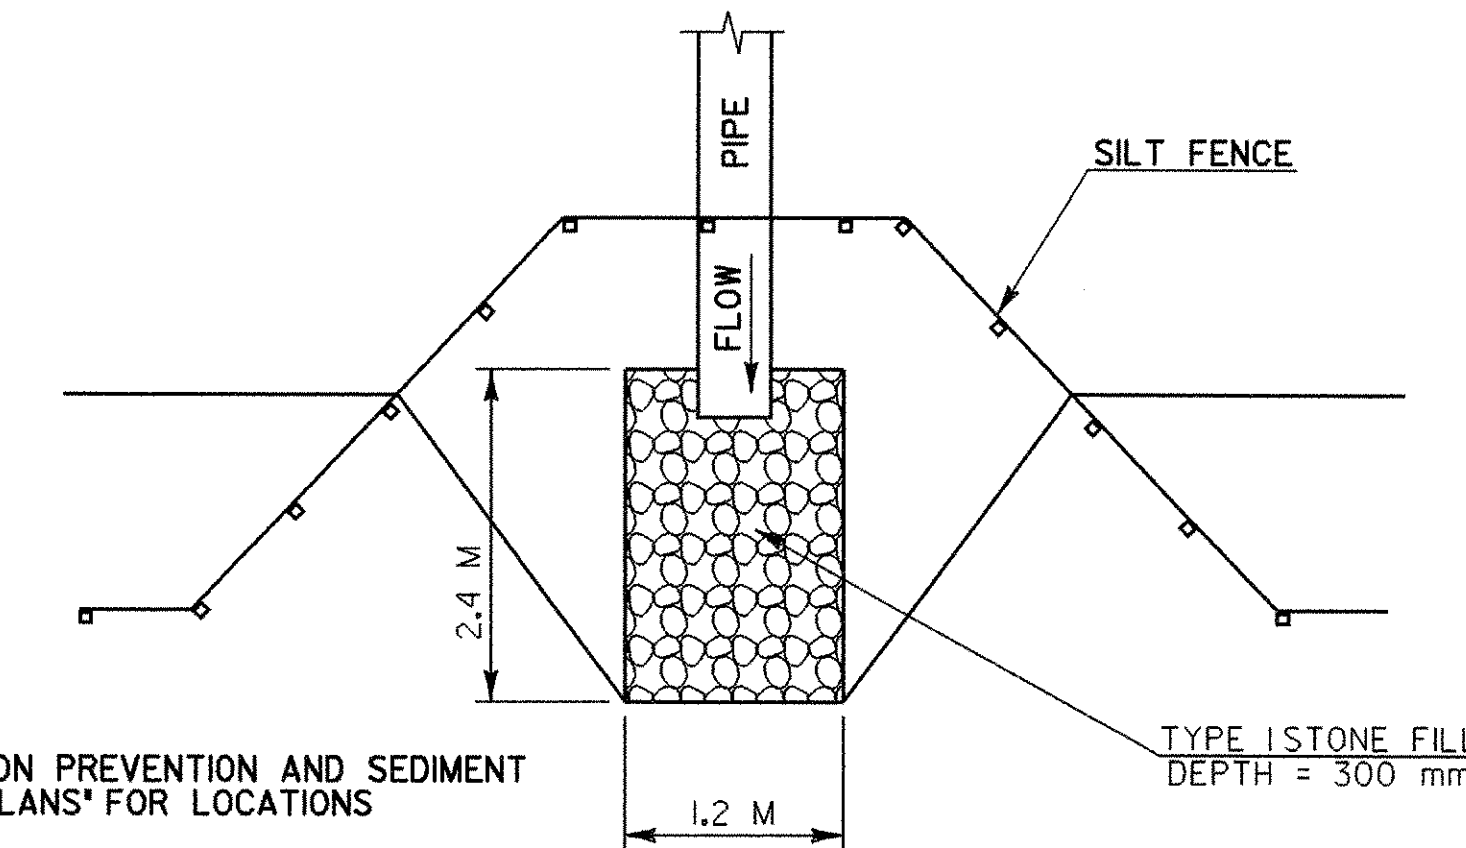

NOTES

1. SEE 'EROSION PREVENTION AND SEDIMENT CONTROL PLANS' FOR LOCATIONS
2. ALL TEMPORARY PADS TO BE SIZED AS DESCRIBED ABOVE
3. GEOTEXTILE UNDER STONE FILL SHALL BE PLACED UNDER THE STONE PADS.

**DETAIL 'F'
PROPOSED PIPE OUTLET CONTROL**
N.T.S.

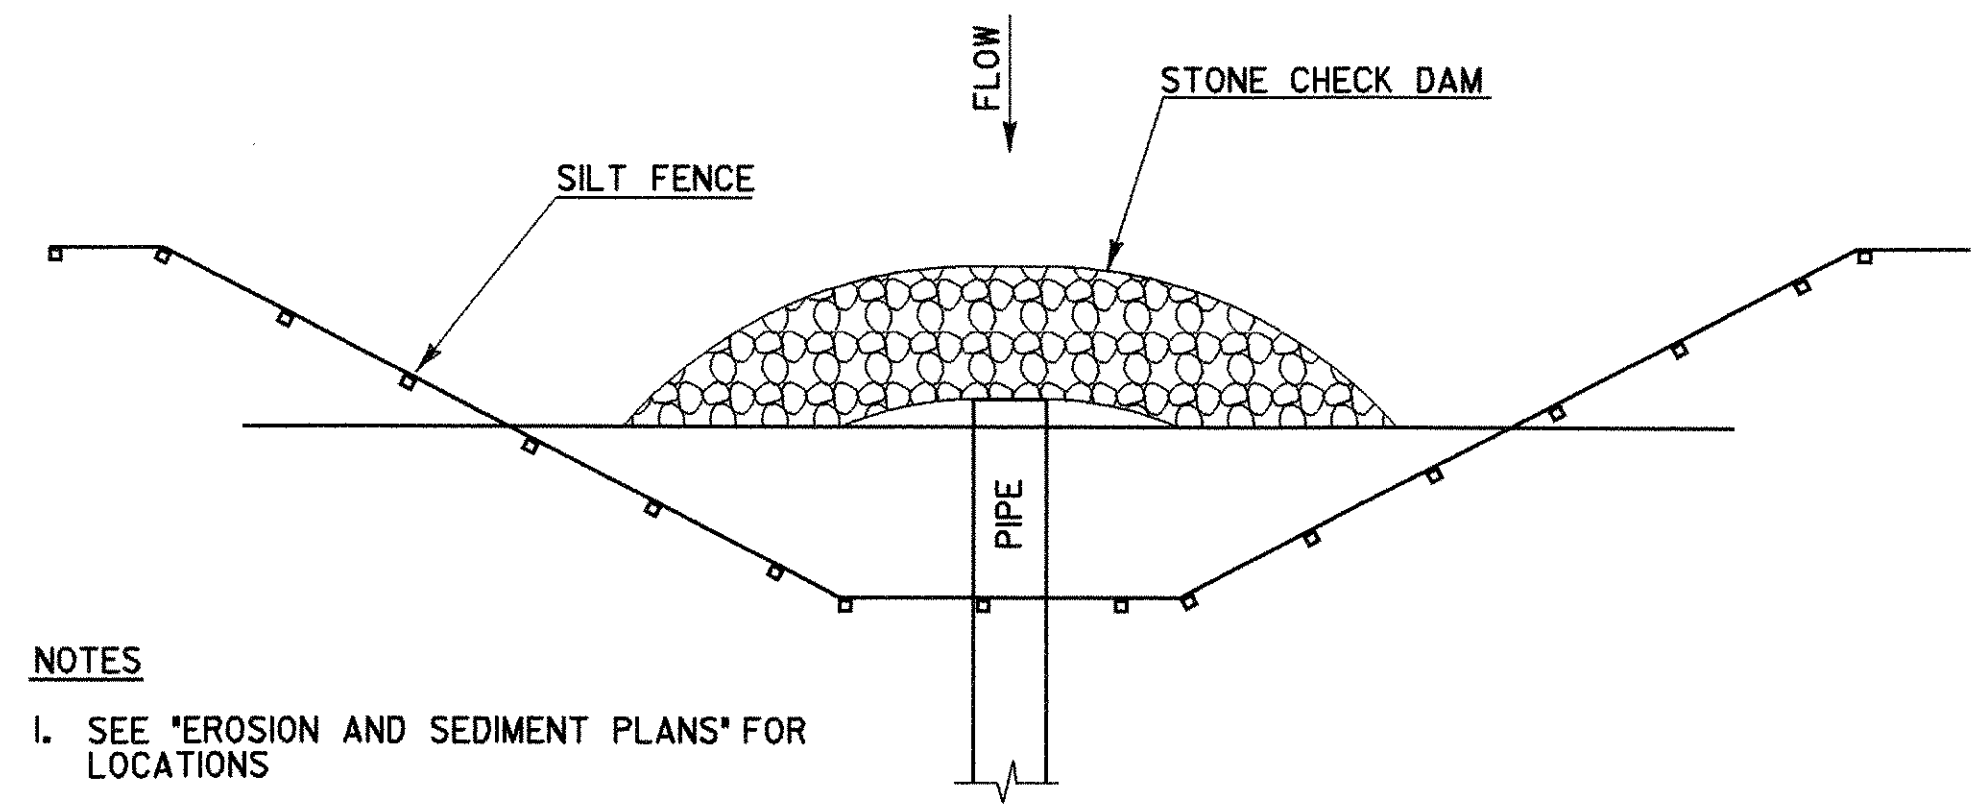

NOTES

1. SEE 'EROSION AND SEDIMENT PLANS' FOR LOCATIONS
2. ROCK CHECK DAM SHALL BE SIZED TO CREATE 600mm PONDING OF STORMWATER BEFORE ENTERING PIPE.
3. GEOTEXTILE UNDER STONE FILL SHALL BE PLACED UNDER THE STONE PADS.

**DETAIL 'H'
PROPOSED PIPE INLET CONTROL**
N.T.S.

SILT FENCE NOTES:

1. SILT FENCE SHALL BE INSTALLED ON A LINE OF EQUAL ELEVATION (CONTOUR). IT MAY BE INSTALLED AT THE BOTTOM OF THE SLOPE.
2. SILT FENCE SHALL NOT BE USED ACROSS CONCENTRATED FLOW.
3. SILT FENCE SHALL GENERALLY BE PLACED 1.2 m BEYOND TOE OF SLOPE TO PROVIDE ADEQUATE AREA FOR SEDIMENT STORAGE AND FACILITATE MAINTENANCE OF SEDIMENT CONTAINMENT AREA.
4. ALL ENDS SHALL BE 'J' HOOKED TO TRAP SEDIMENT.
5. THE BOTTOM EDGE OF SILT FENCE SHALL BE BURIED A MINIMUM OF 150 mm BELOW GROUND, AND KEYED IN 100 mm. THE FENCE SHALL BE INSTALLED WITH THE POSTS ON THE DOWNSTREAM SIDE OF THE FABRIC.
6. MEASURES SHALL BE INSPECTED EVERY SEVEN (7) CALENDAR DAYS AND WITHIN 24 HOURS OF A STORM EVENT GREAT ENOUGH TO CAUSE WATER TO LEAVE THE CONSTRUCTION SITE.
7. MEASURES SHALL BE CLEANED AND REPAIRED AS NEEDED. SEDIMENT SHALL BE REMOVED WHEN ACCUMULATION REACHES ONE-HALF OF THE MEASURE HEIGHT. SEDIMENT SHALL BE DISPOSED OF AS UNSUITABLE MATERIAL.
8. SILT FENCE SHALL BE REMOVED WHEN THE AREA HAS BEEN STABILIZED. AT TIME OF REMOVAL OF THE SILT FENCE, THE DISTURBED AREA SHALL BE REPAIRED AND STABILIZED.
9. PAYMENT FOR INSTALLATION AND REMOVAL OF SILT FENCE SHALL BE MADE UNDER THE GEOTEXTILE FOR SILT FENCE ITEM.
10. PAYMENT FOR MONITORING SILT FENCE SHALL BE MADE UNDER THE MONITORING EROSION & SEDIMENT CONTROL PLAN ITEM.
11. PAYMENT FOR MAINTAINING SILT FENCE SHALL BE MADE UNDER THE FIELD MAINTENANCE OF EROSION & SEDIMENT CONTROL PLAN ITEM, UNLESS MAINTENANCE IS REQUIRED DUE TO POOR INSTALLATION PRACTICES.
12. SEE 'EROSION PREVENTION AND SEDIMENT CONTROL PLANS' FOR LOCATIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE NOTED.



PROJECT NAME: HIGHGATE - FRANKLIN	PLOT DATE: 09-MAY-2005
PROJECT NUMBER: STP RS 030(I) SA	DRAWN BY: SQUAD B
FILE NAME: ...85c060/design/dc060d+1.dgn	CHECKED BY: SQUAD B
PROJECT LEADER: DELLASANTA	SHEET 161 OF 450
DESIGNED BY: SQUAD B	
IPARM FILE NAME: dc060ec2.1	