

**REMOVE EXISTING SIGNS**

STA. 14+14 LT.  
STA. 14+54 LT.  
STA. 14+75 RT.

**TRAFFIC SIGNS, TYPE A**

STA. 9+25 RT.

**ERECTING SALVAGED SIGNS**

STA. 14+75 RT.

**HD STEEL BEAM GUARDRAIL, GALVANIZED**

STA. 11+15 - 12+05 LT.  
STA. 12+74 - 13+44 LT.  
STA. 12+06 - 12+28 RT.  
STA. 12+97 - 14+93 RT.

**CONSTRUCT DRIVE**

STA. 11+25 RT. 1/2" TYPE III PAVED DRIVE

**BRIDGE RAILING - GALVANIZED HD STEEL BEAM/FASCIA MOUNTED**

STA. 12+05 - 12+74 LT.  
STA. 12+28 - 12+97 RT.

**CONSTRUCT FIELD DRIVE WITH 6" AGGREGATE SURFACE COURSE**

STA. 12+00 RT.  
STA. 13+50 LT.

**REMOVAL OF EXISTING FENCE**

STA. 10+25 LT. - 12+30 RT.  
STA. 12+91 RT. - 13+56 LT.

**WOVEN WIRE FENCE WITH WOOD POSTS\***

STA. 9+60 LT. - 11+25 LT.  
STA. 12+55 LT. - 13+40 LT.

\* FENCE SHALL BE BARBED WIRE AND SET ALONG NEW R.O.W. LINE

**DRIVE GATE FOR WOVEN WIRE FENCE**

STA. 13+40 LT. - 13+56 LT.

NEW OPTION PIPE  
(0.064" CSP, 0.060" CAAP OR CPEP)

STA. 13+32 LT - STA. 13+60 LT - 18" X 30'

NEW OPTION PIPE W/END SECTION  
(0.064" CSP, 0.060" CAAP OR CPEP)

STA. 10+80 C - 18" X 48'  
STA. 11+92 RT - STA. 12+22 RT - 18" X 32'


ANCHORS FOR STEEL BEAM GUARD RAIL

STA. 11+18 LT  
STA. 13+41 LT  
STA. 12+09 RT  
STA. 14+91 RT

**END R.O.W. PROJECT**

BRZ 1444(23)

STA. 15+25 26' RT.

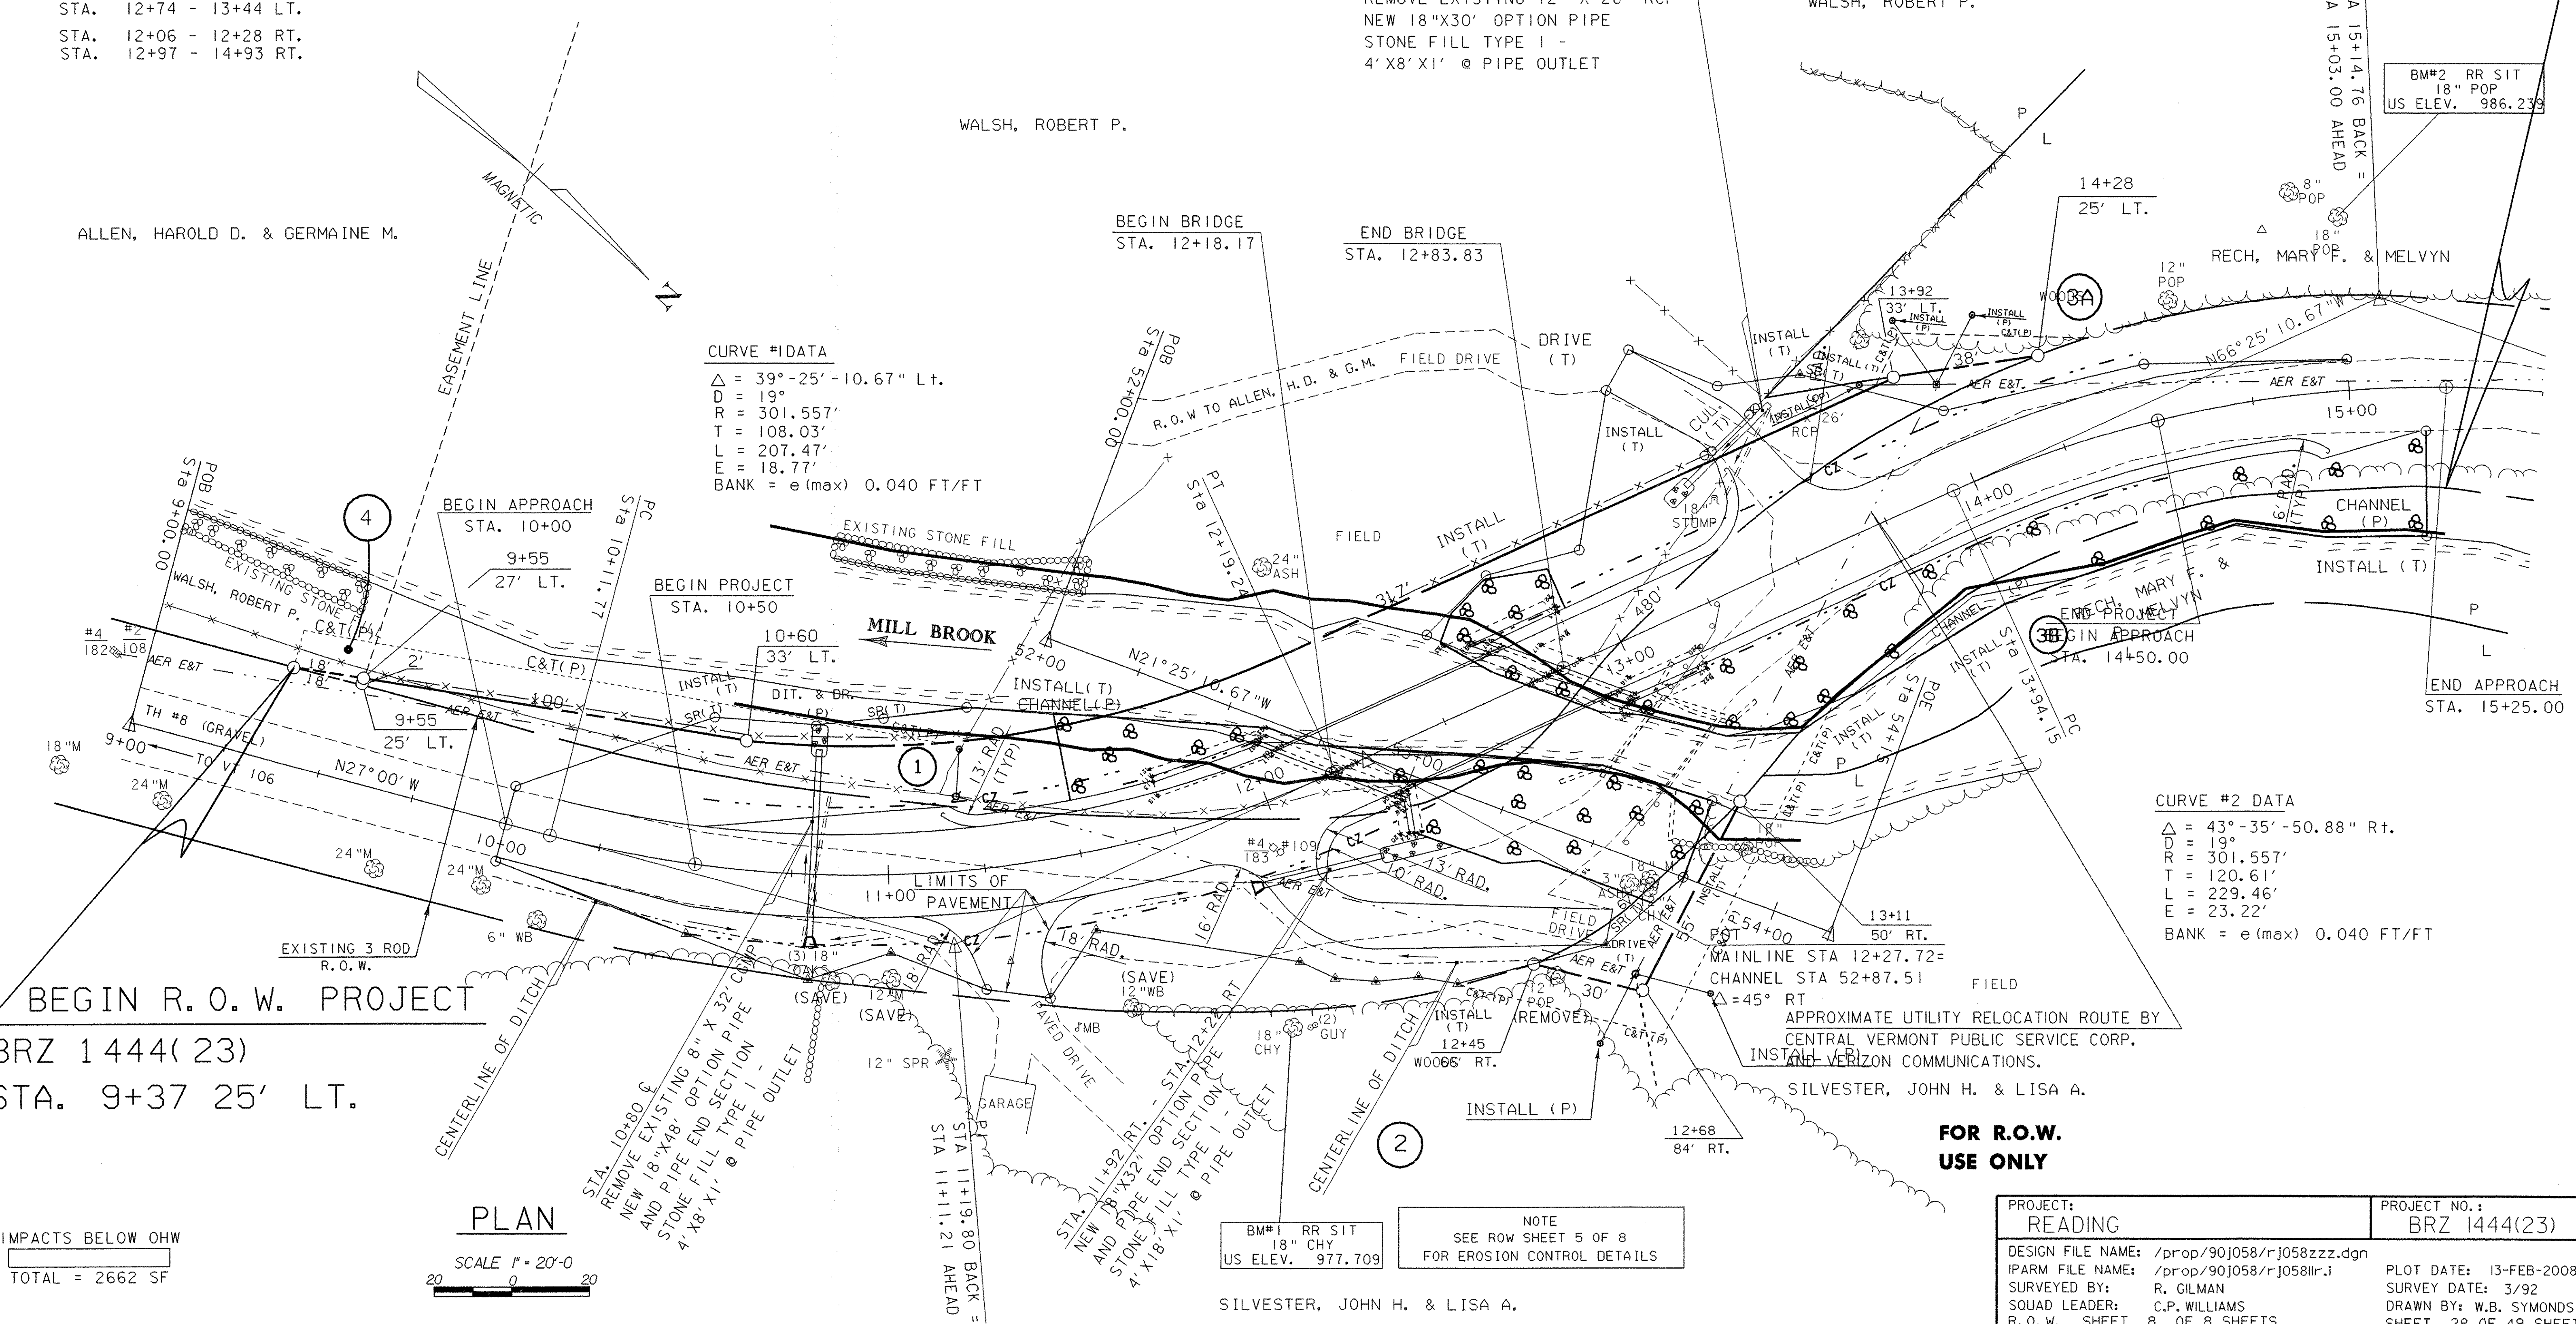

BEGIN R.O.W. PROJECT  
BRZ 1444(23)  
STA. 9+37 25' LT.

PLAN  
SCALE 1" = 20'-0"

IMPACTS BELOW OHW  
TOTAL = 2662 SF

**FOR R.O.W. USE ONLY**

PROJECT: <b>READING</b>	PROJECT NO.: <b>BRZ 1444(23)</b>
DESIGN FILE NAME: /prop/90j058/rj058zzz.dgn	PLOT DATE: 13-FEB-2008
IPARM FILE NAME: /prop/90j058/rj058llr.i	SURVEY DATE: 3/92
SURVEYED BY: R. GILMAN	DRAWN BY: W.B. SYMONDS
SQUAD LEADER: C.P. WILLIAMS	R.O.W. SHEET 8 OF 8 SHEETS
	SHEET 28 OF 49 SHEETS

NOTE  
SEE ROW SHEET 5 OF 8  
FOR EROSION CONTROL DETAILS

SILVESTER, JOHN H. & LISA A.