

NOTE:



CONSTRUCTION OF TEMPORARY DETOUR AT STATIONS 1+050 LT - 1+065 LT SHALL NOT INCLUDE CUTTING OF STEEP EMBANKMENT NORTHWEST OF PROJECT. CONSTRUCTION OF DETOUR IN THIS AREA SHALL BE ACCOMPLISHED BY FILLING AGAINST THE EMBANKMENT TO ACHIEVE DESIRED GRADE. THE CONTRACTOR SHOULD AVOID DISTURBING EXISTING VEGETATION WHEN REMOVING DETOUR FILL MATERIAL THAT IS AGAINST THE STEEP EMBANKMENT.

EROSION AND SEDIMENT CONTROL INDEX	
NO.	DESCRIPTION
①	INSTALL LINES OF SILT FENCING ON CONTOUR AS SHOWN.
②	ENDS OF FENCE TURNED UPHILL TO CREATE PONDING
③	PROJECT LIMITS DEMARCATION FENCE (SNOW FENCE (MOD.-PDF))

NOTE: ALL DISTURBED AREAS WITH SLOPES GREATER THAN 1:3 WILL REQUIRE TEMPORARY EROSION MATTING (SEE EROSION CONTROL DETAILS SHEET)



EROSION CONTROL LEGEND	
	SILT FENCE
	PROJECT DEMARCATION FENCE (SNOW FENCE (MOD.-PDF))
	STONE FILL TYPE IV
	STONE FILL TYPE I

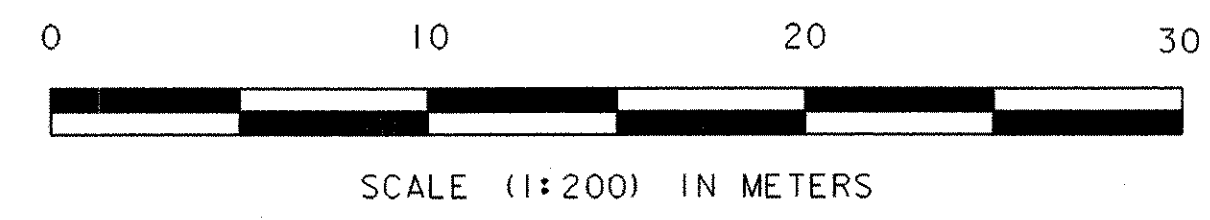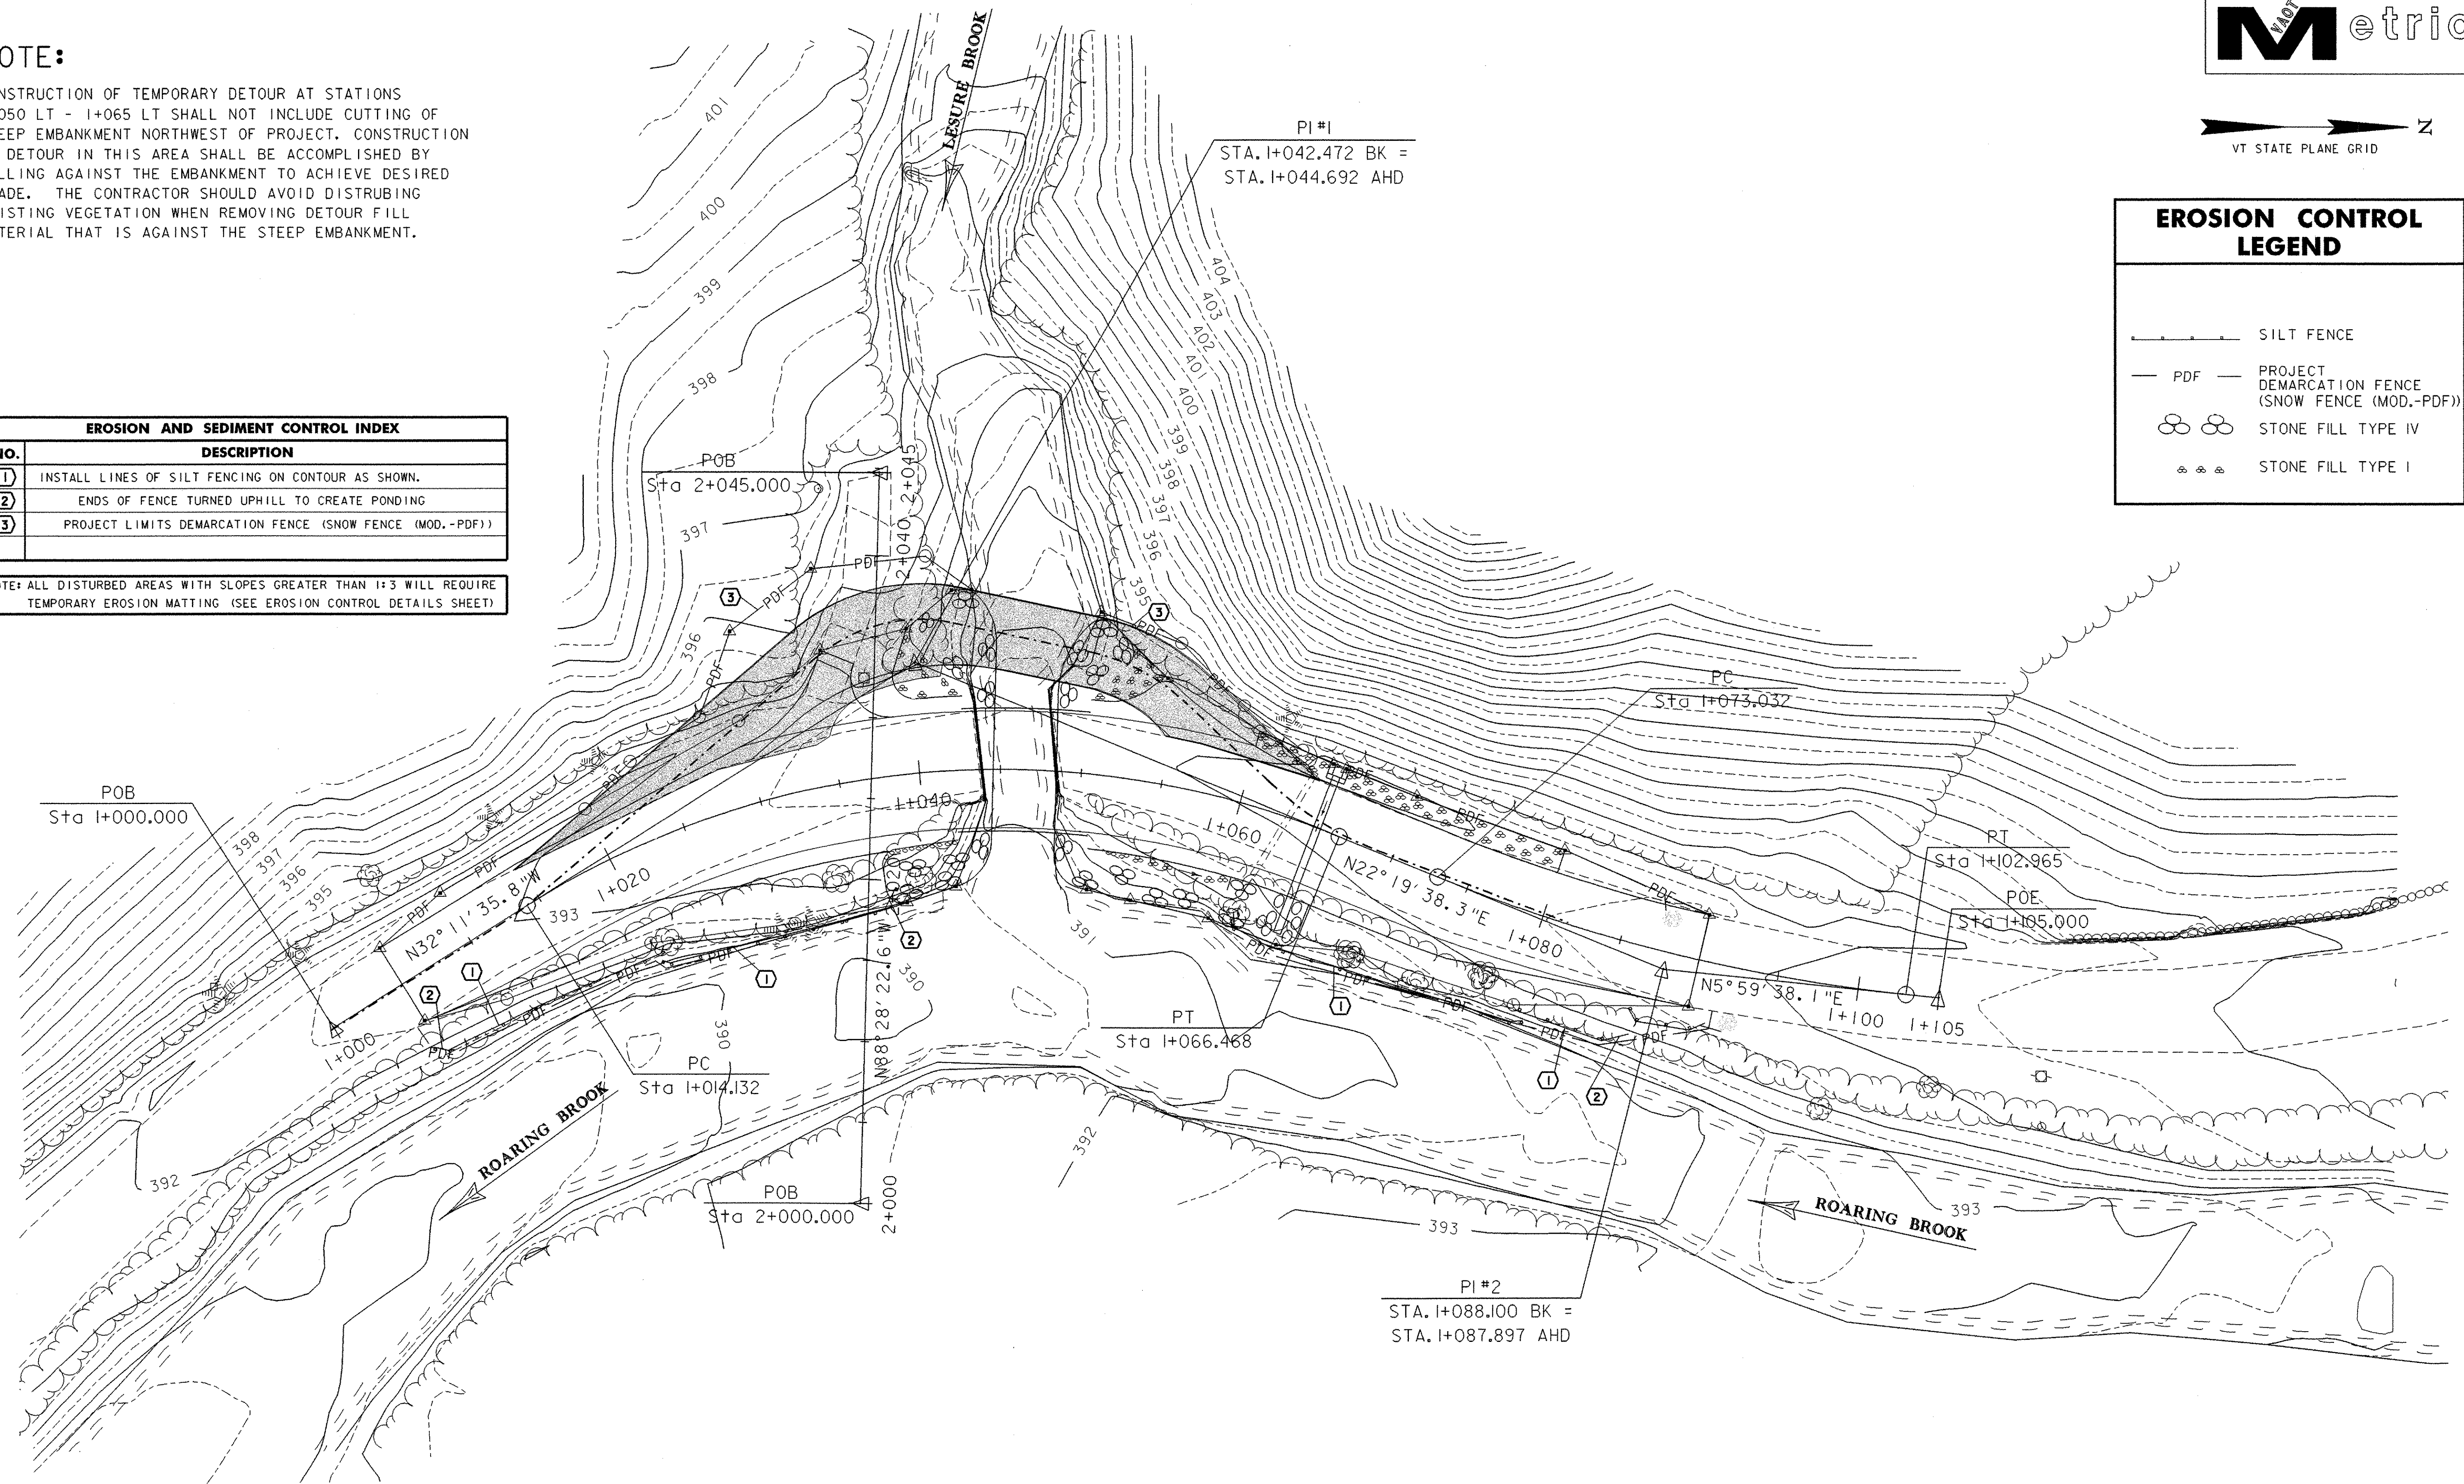

SHEET NAME: EXISTING CONDITIONS, RESOURCES, AND PERIMETER EROSION CONTROLS	
PROJECT NAME: STAMFORD	HIGHWAY NO.: TH 12
PROJECT NUMBER: TH3 94II	BRIDGE NO.: 14
	OVER: LESURE BROOK
FILE NAME: /str/1/94j072/sj072ec.dgn	PLOT DATE: 16-OCT-2003
PROJECT MANAGER: G.S. ROGERS	DRAWN BY: KJPMAL
DESIGNED BY: K. UPMAL	IPARM NAME: sj072ec.l
BRIDGE SHEET NUMBER:	SHEET 15 OF 38