


QUANTITY SHEET 4

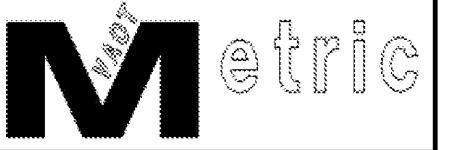

SUMMARY OF BRIDGE QUANTITIES										TOTALS		DESCRIPTIONS			DETAILED SUMMARY OF QUANTITIES		
						DECK	APP SLAB 1	APP SLAB 2	ABUT 1	ABUT 2	BRIDGE TOTAL	UNIT	ITEMS	ITEM NUMBER	QUANTITIES	UNIT	ITEMS
									130	140	270	CM	UNCLASSIFIED CHANNEL EXCAVATION	203.27			
									330	220	550	CM	GRANULAR BACKFILL FOR STRUCTURES	204.30			
									360	320	680	CM	COFFERDAM EXCAVATION, EARTH	208.30			
									50	40	90	CM	COFFERDAM EXCAVATION, ROCK	208.35			
									1		1	LS	COFFERDAM (STA. 1+108.000)	208.40			
										1	1	LS	COFFERDAM (STA. 1+134.000)	208.40			
						101					101	CM	CONCRETE, HIGH PERFORMANCE CLASS A	501.33			
							15	17	85	86	203	CM	CONCRETE, HIGH PERFORMANCE CLASS B	501.34			
						34310					34310	KG	STRUCTURAL STEEL, PLATE GIRDER	506.55			
							1586	1817	5955	5700	15058	KG	REINFORCING STEEL	507.15			
						10830					10830	KG	EPOXY COATED REINFORCING STEEL	507.17			
						1					1	LS	SHEAR CONNECTORS (960 - 22 X 180)	508.15			
						27			1	1	29	L	WATER REPELLENT, SILANE	514.10			
							7.5	7.5			15	M	BRIDGE EXPANSION JOINT, ASPHALTIC PLUG	516.10			
						224					224	SM	SHEET MEMBRANE WATERPROOFING, TORCH APPLIED	519.20			
									4	4	8	EACH	BEARING DEVICE ASSEMBLY, PREFORMED FABRIC PAD	531.10			
										10	10	CM	STONE FILL, TYPE I	613.10			
									205	205	410	CM	STONE FILL, TYPE III	613.12			
									170	160	330	SM	GEOTEXTILE UNDER STONE FILL	649.31			
									70	90	160	SM	GRUBBING MATERIAL	651.40			
						27					27	M	SPECIAL PROVISION (BRIDGE RAILING, ANODIZED 3 RAIL ALUMINUM)	900.640			
						27					27	M	SPECIAL PROVISION (BRIDGE RAILING, ANODIZED ALUMINUM/PEDESTRIAN)	900.640			
						35					35	T	SPECIAL PROVISION (BITUMINOUS CONCRETE PAVEMENT, SMALL QUANTITY)	900.680			