



KEYED NOTES :


- ▲ EXISTING ELECTRIC WALL HEATER TO BE REMOVED
DISCONNECT WIRES FROM CIRCUIT BREAKER & TAG BOTH ENDS OR REMOVE
PATCH WALL TO MATCH EXISTING.
- ▲ EXISTING ELECTRIC WALL HEATER TO REMAIN
- ▲ EXISTING ELECTRIC RADIATION TO REMAIN
- ▲ EXISTING ELECTRICAL PANELS
- ▲ PROVIDE NEW DIRECT VENT, WALL FURNACE
EMPIRE MODEL DV-215-SG 15,000 BTU INPUT
10,500 BTU OUTPUT
- ▲ RUN WIRE FOR THERMOSTAT ABOVE CEILING. PROVIDE CONDUIT,
WIREMOLD OR NEATLY ATTACH TO GAS PIPING WHERE EXPOSED.

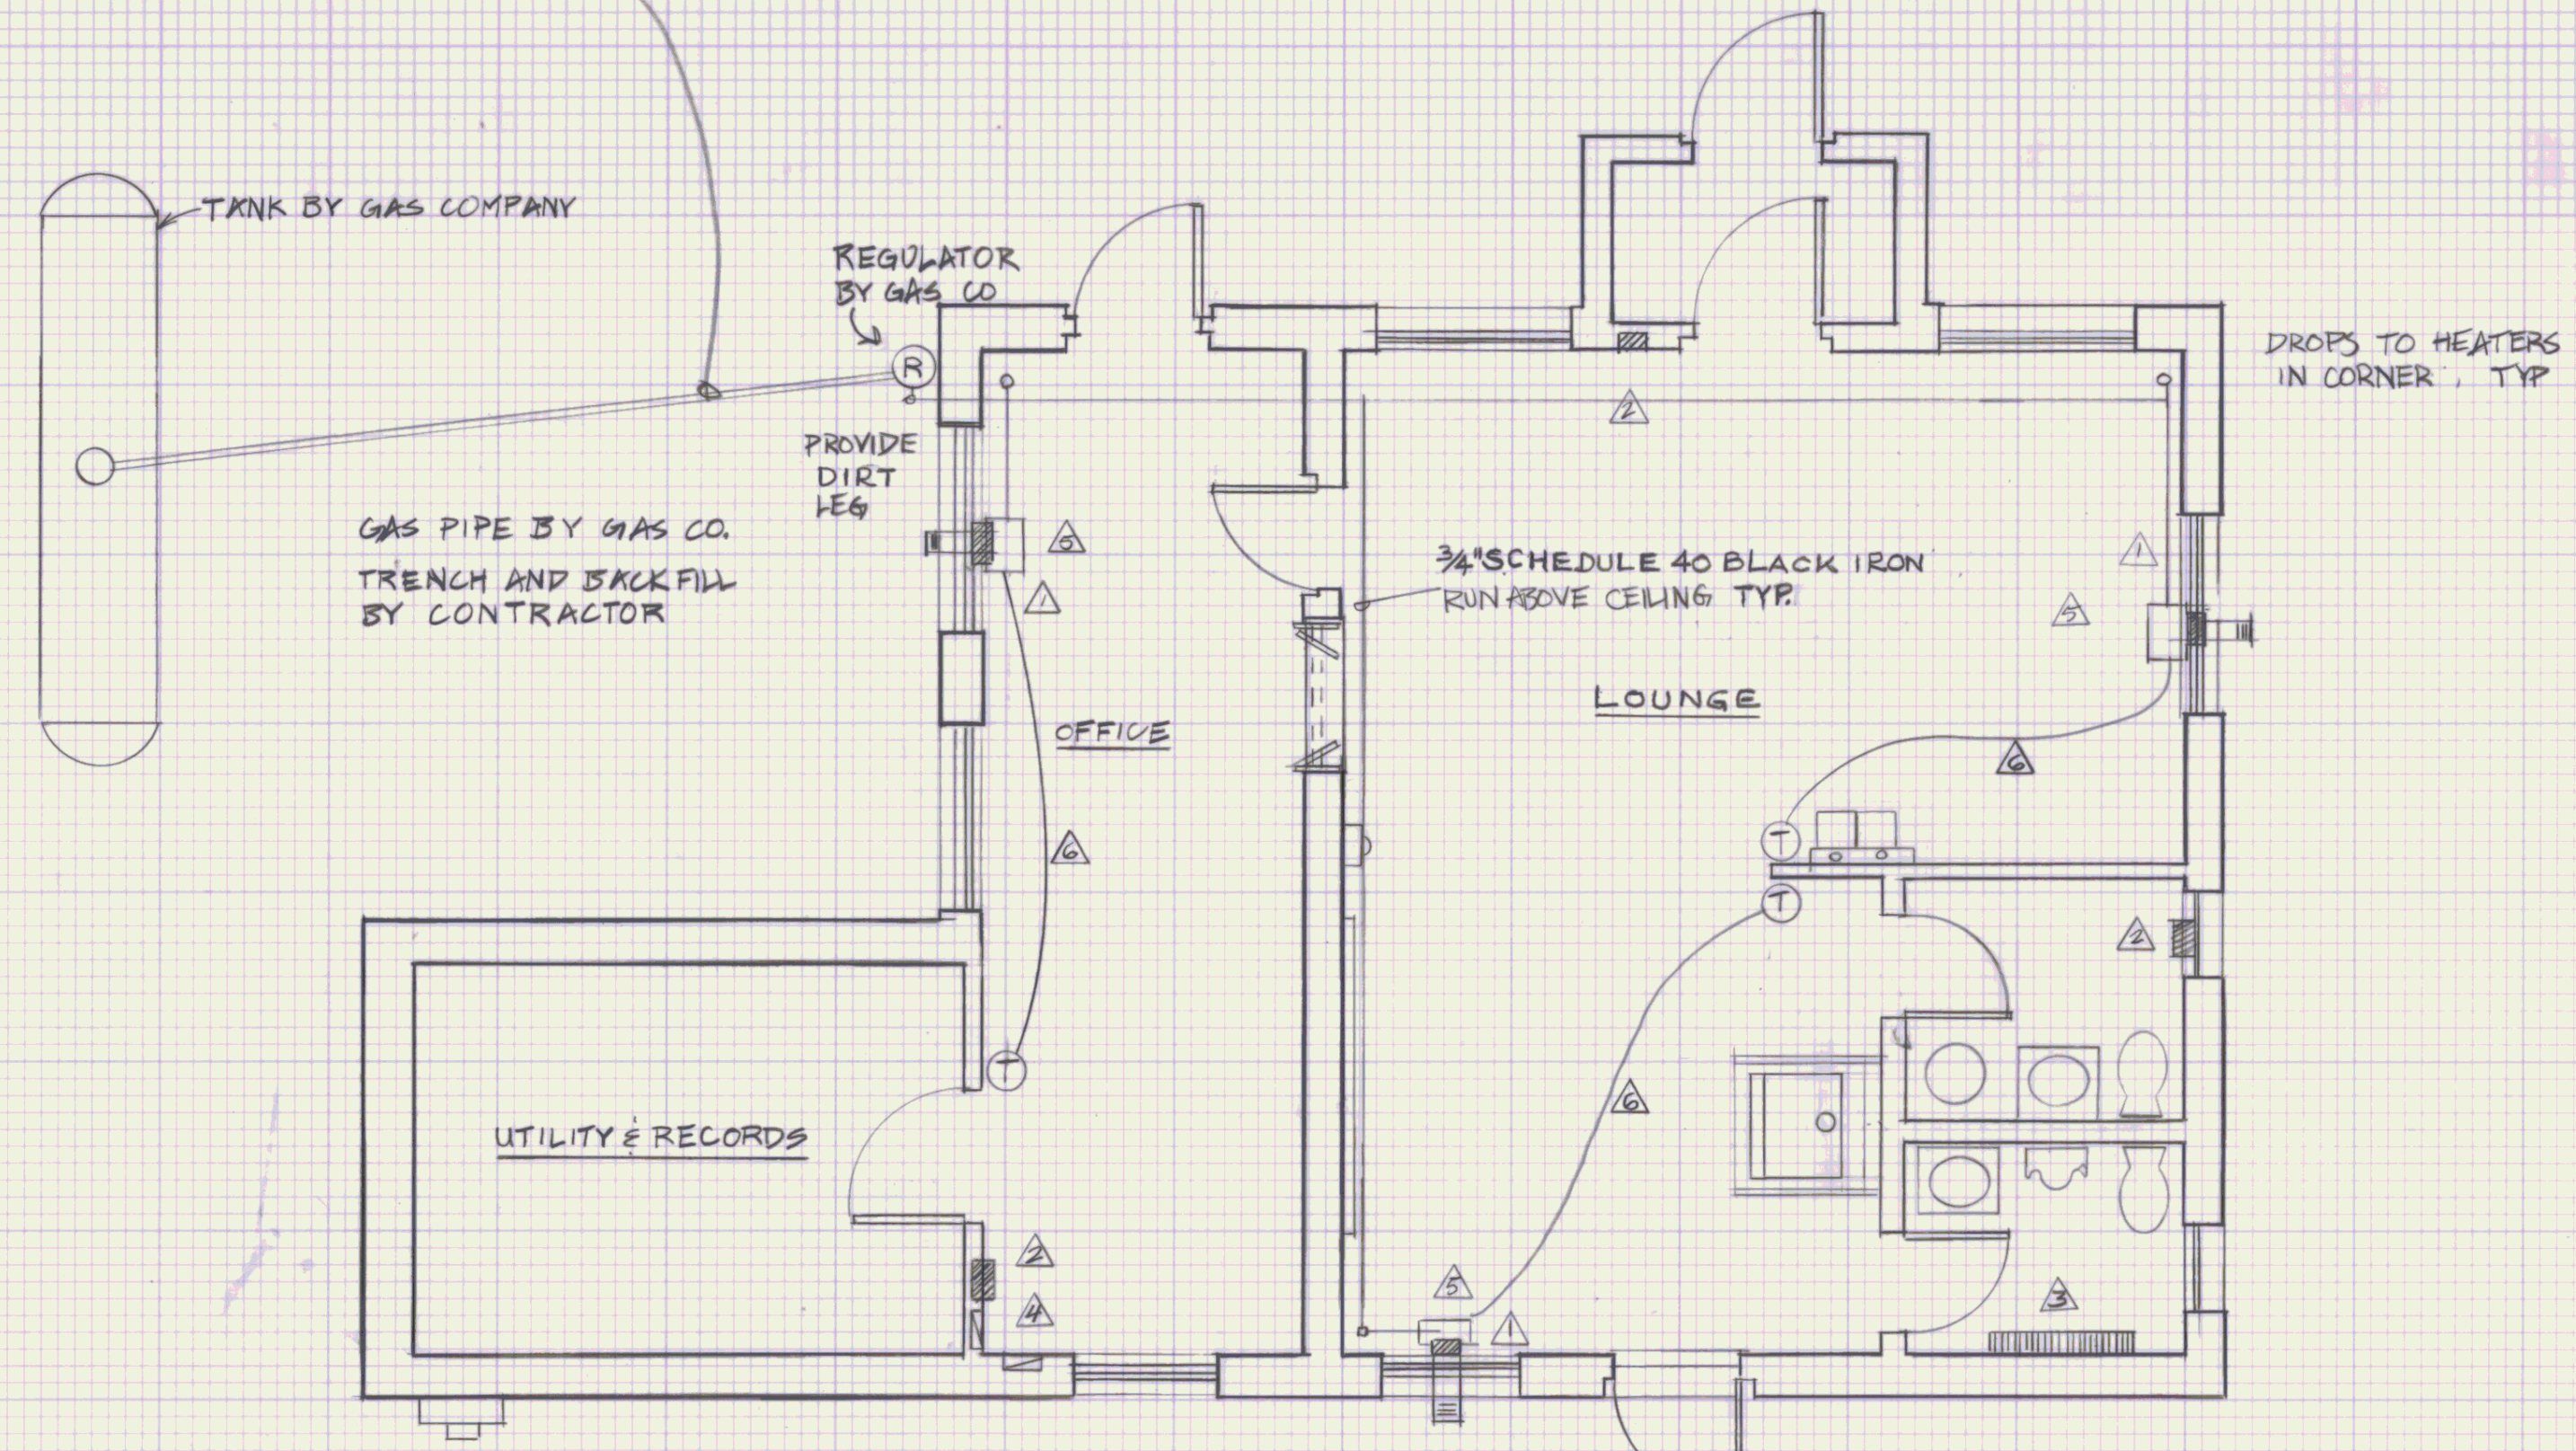

GROUND FLOOR 1/4" = 1'

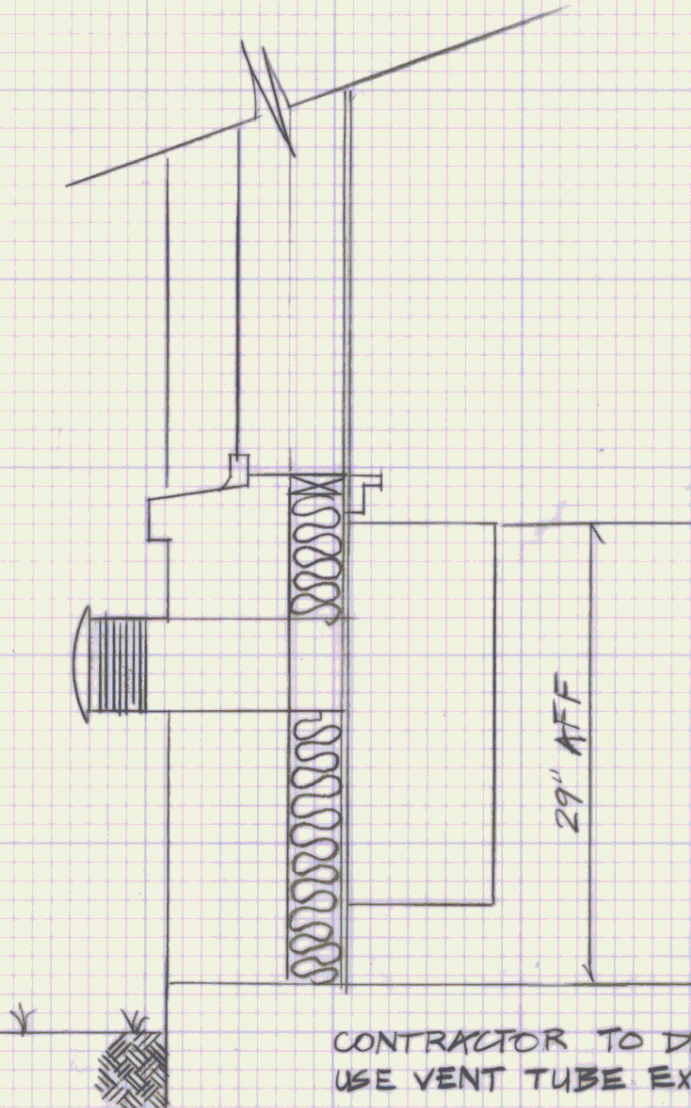

NOT TO SCALE

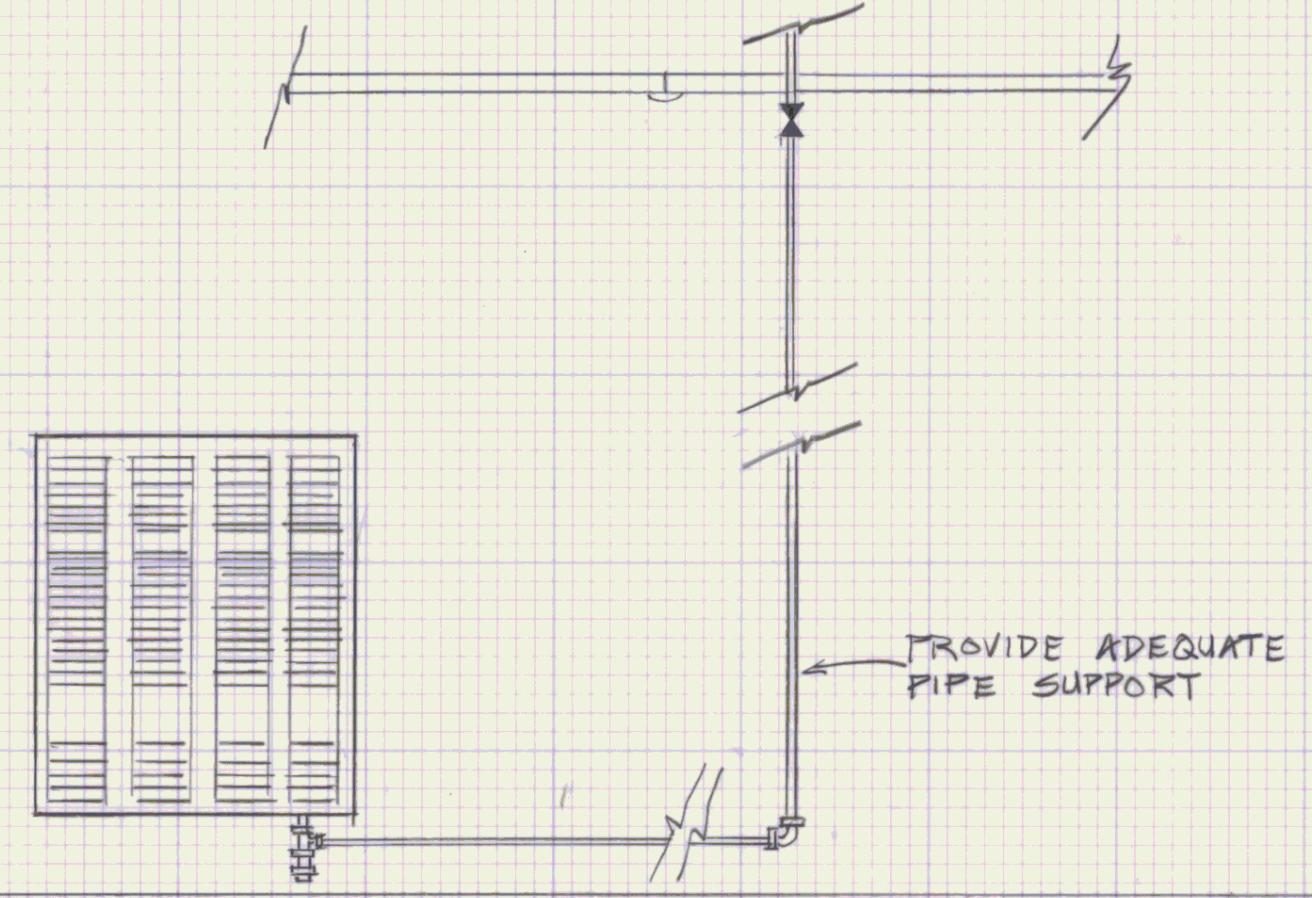

NOT TO SCALE

STATE OF VERMONT DEPARTMENT OF STATE BUILDINGS AGENCY OF ADMINISTRATION MONTPELIER, VERMONT			
REPLACE ELECTRIC HEAT NEWPORT STATE AIRPORT			
COVENTRY, VERMONT			
DATE: AUGUST 23, 1976	SCALE: 1/4" = 1'	REVISIONS:	DWG. NO.
DRAWN BY: J. SIROIS	APPROVED BY: TE 1614		1 OF 1