




ROOF PLAN
SCALE: 1/8" = 1'-0"

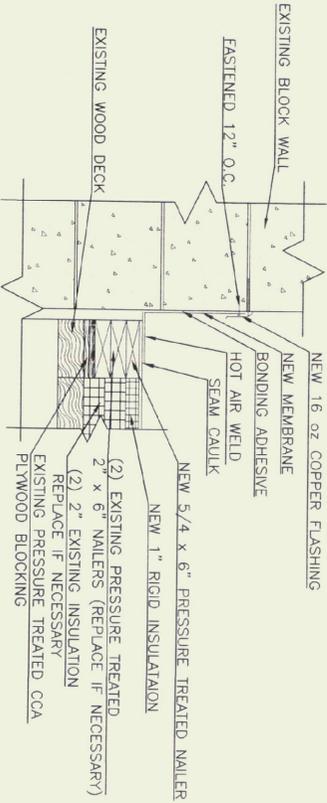


CHIMNEY FLASHING DETAIL
SCALE: 1-1/2" = 1'-0"

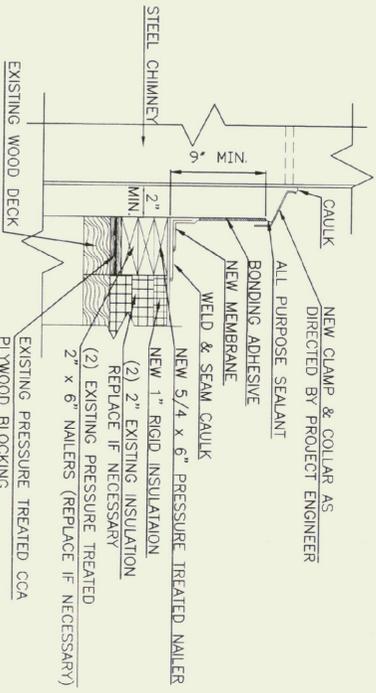


STEEL CHIMNEY DETAIL
SCALE: 1-1/2" = 1'-0"

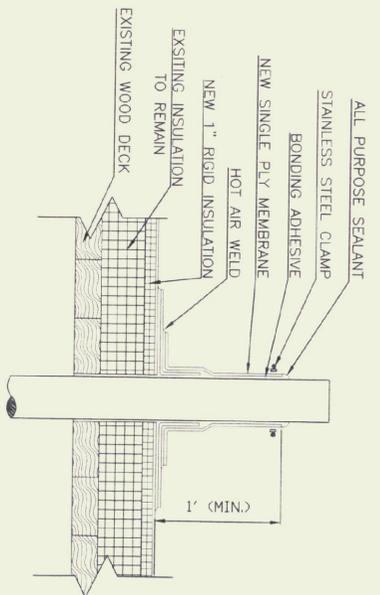


TYPICAL VENT DETAIL
SCALE: 1-1/2" = 1'-0"

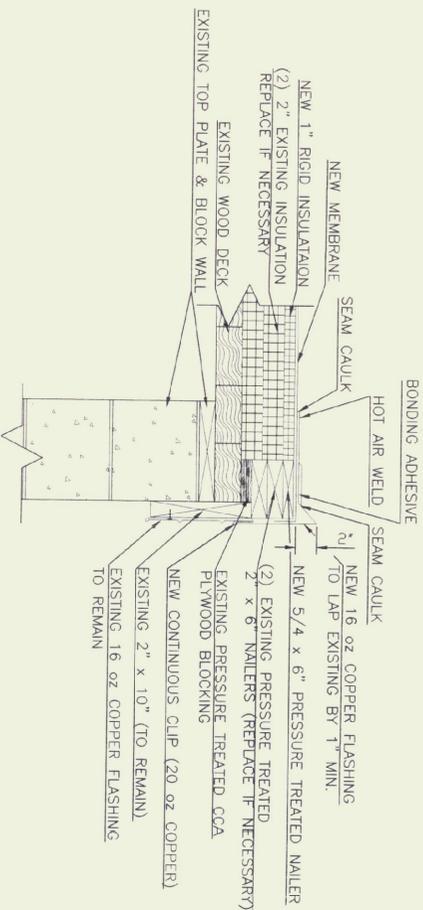

SECTION A-A ROOF RAKE EDGE
SCALE: 1-1/2" = 1'-0"

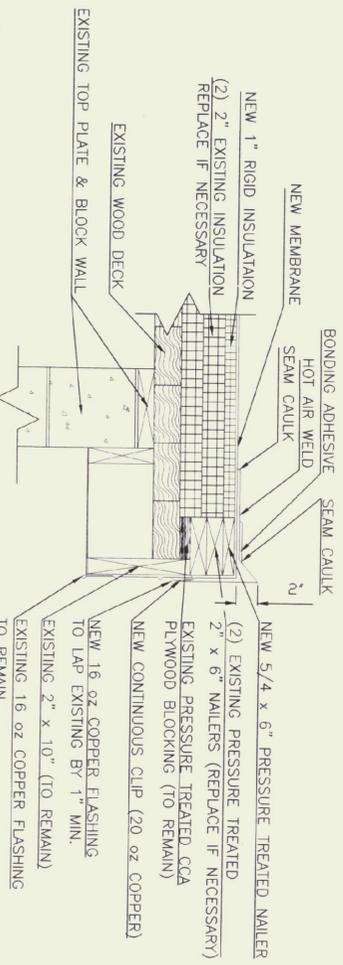

SECTION B-B ROOF DRIP EDGE
SCALE: 1-1/2" = 1'-0"

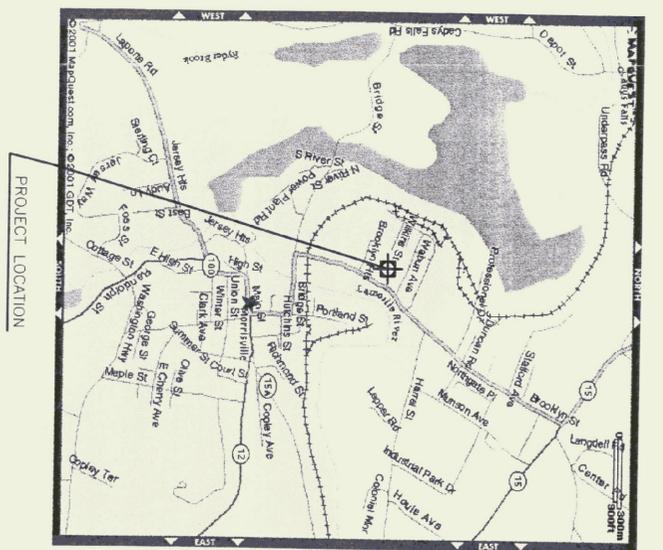

GENERAL NOTES:

- 1.) REMOVE AND REPLACE SOME OF THE 2" INSULATION THAT IS WET. THIS WILL BE DONE BY TIME AND MATERIALS.
- 2.) HOURLY RATES APPLIED TO THESE COSTS WILL BE IN ACCORDANCE WITH THE HOURLY RATE SCHEDULE SUBMITTED AT TIME OF BID, REPRESENTATIVE.
- 3.) EXISTING MEMBRANE AND FLASHING TO BE REMOVED AND DISPOSED OF. EXISTING INSULATION TO BE PROTECTED AND REMAIN IN PLACE. 1" NEW RIGID INSULATION AND NEW .060 EPDM MEMBRANE ROOFING SYSTEM WITH METAL FLASHING.
- 4.) ALL BLOCKING, CANT STRIPS, & LUMBER TO BE PRESSURE TREATED AND REPLACED AS REQUIRED.
- 5.) DETAILS ARE EXAMPLES ONLY. ACTUAL INSTALLATION TO BE DONE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- 6.) ALL MATERIAL REMOVED SHALL BE PROPERLY AND LEGALLY DISPOSED OF.
- 7.) FIELD VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS.
- 8.) NEW INSULATION TO BE LOOSE LAID TO COMPLY WITH
- 9.) NEW EPDM .060 REINFORCED MEMBRANE TO BE MECHANICALLY FASTENED TO COMPLY WITH ROOFING MANUF. RECOMMENDATIONS.
- 10.) NEW EPDM .060 REINFORCED MEMBRANE SHALL BE COLOR: WHITE
- 11.) CONTRACTOR TO PROVIDE A 15 YEAR TOTAL ROOFING SYSTEM WARRANTY INCLUDING: INSULATION, MEMBRANE, FLASHING, ADHESIVES, FASTENERS, ETC. WARRANTY TO BE PROVIDED BY PRIMARY MANUFACTURER.

