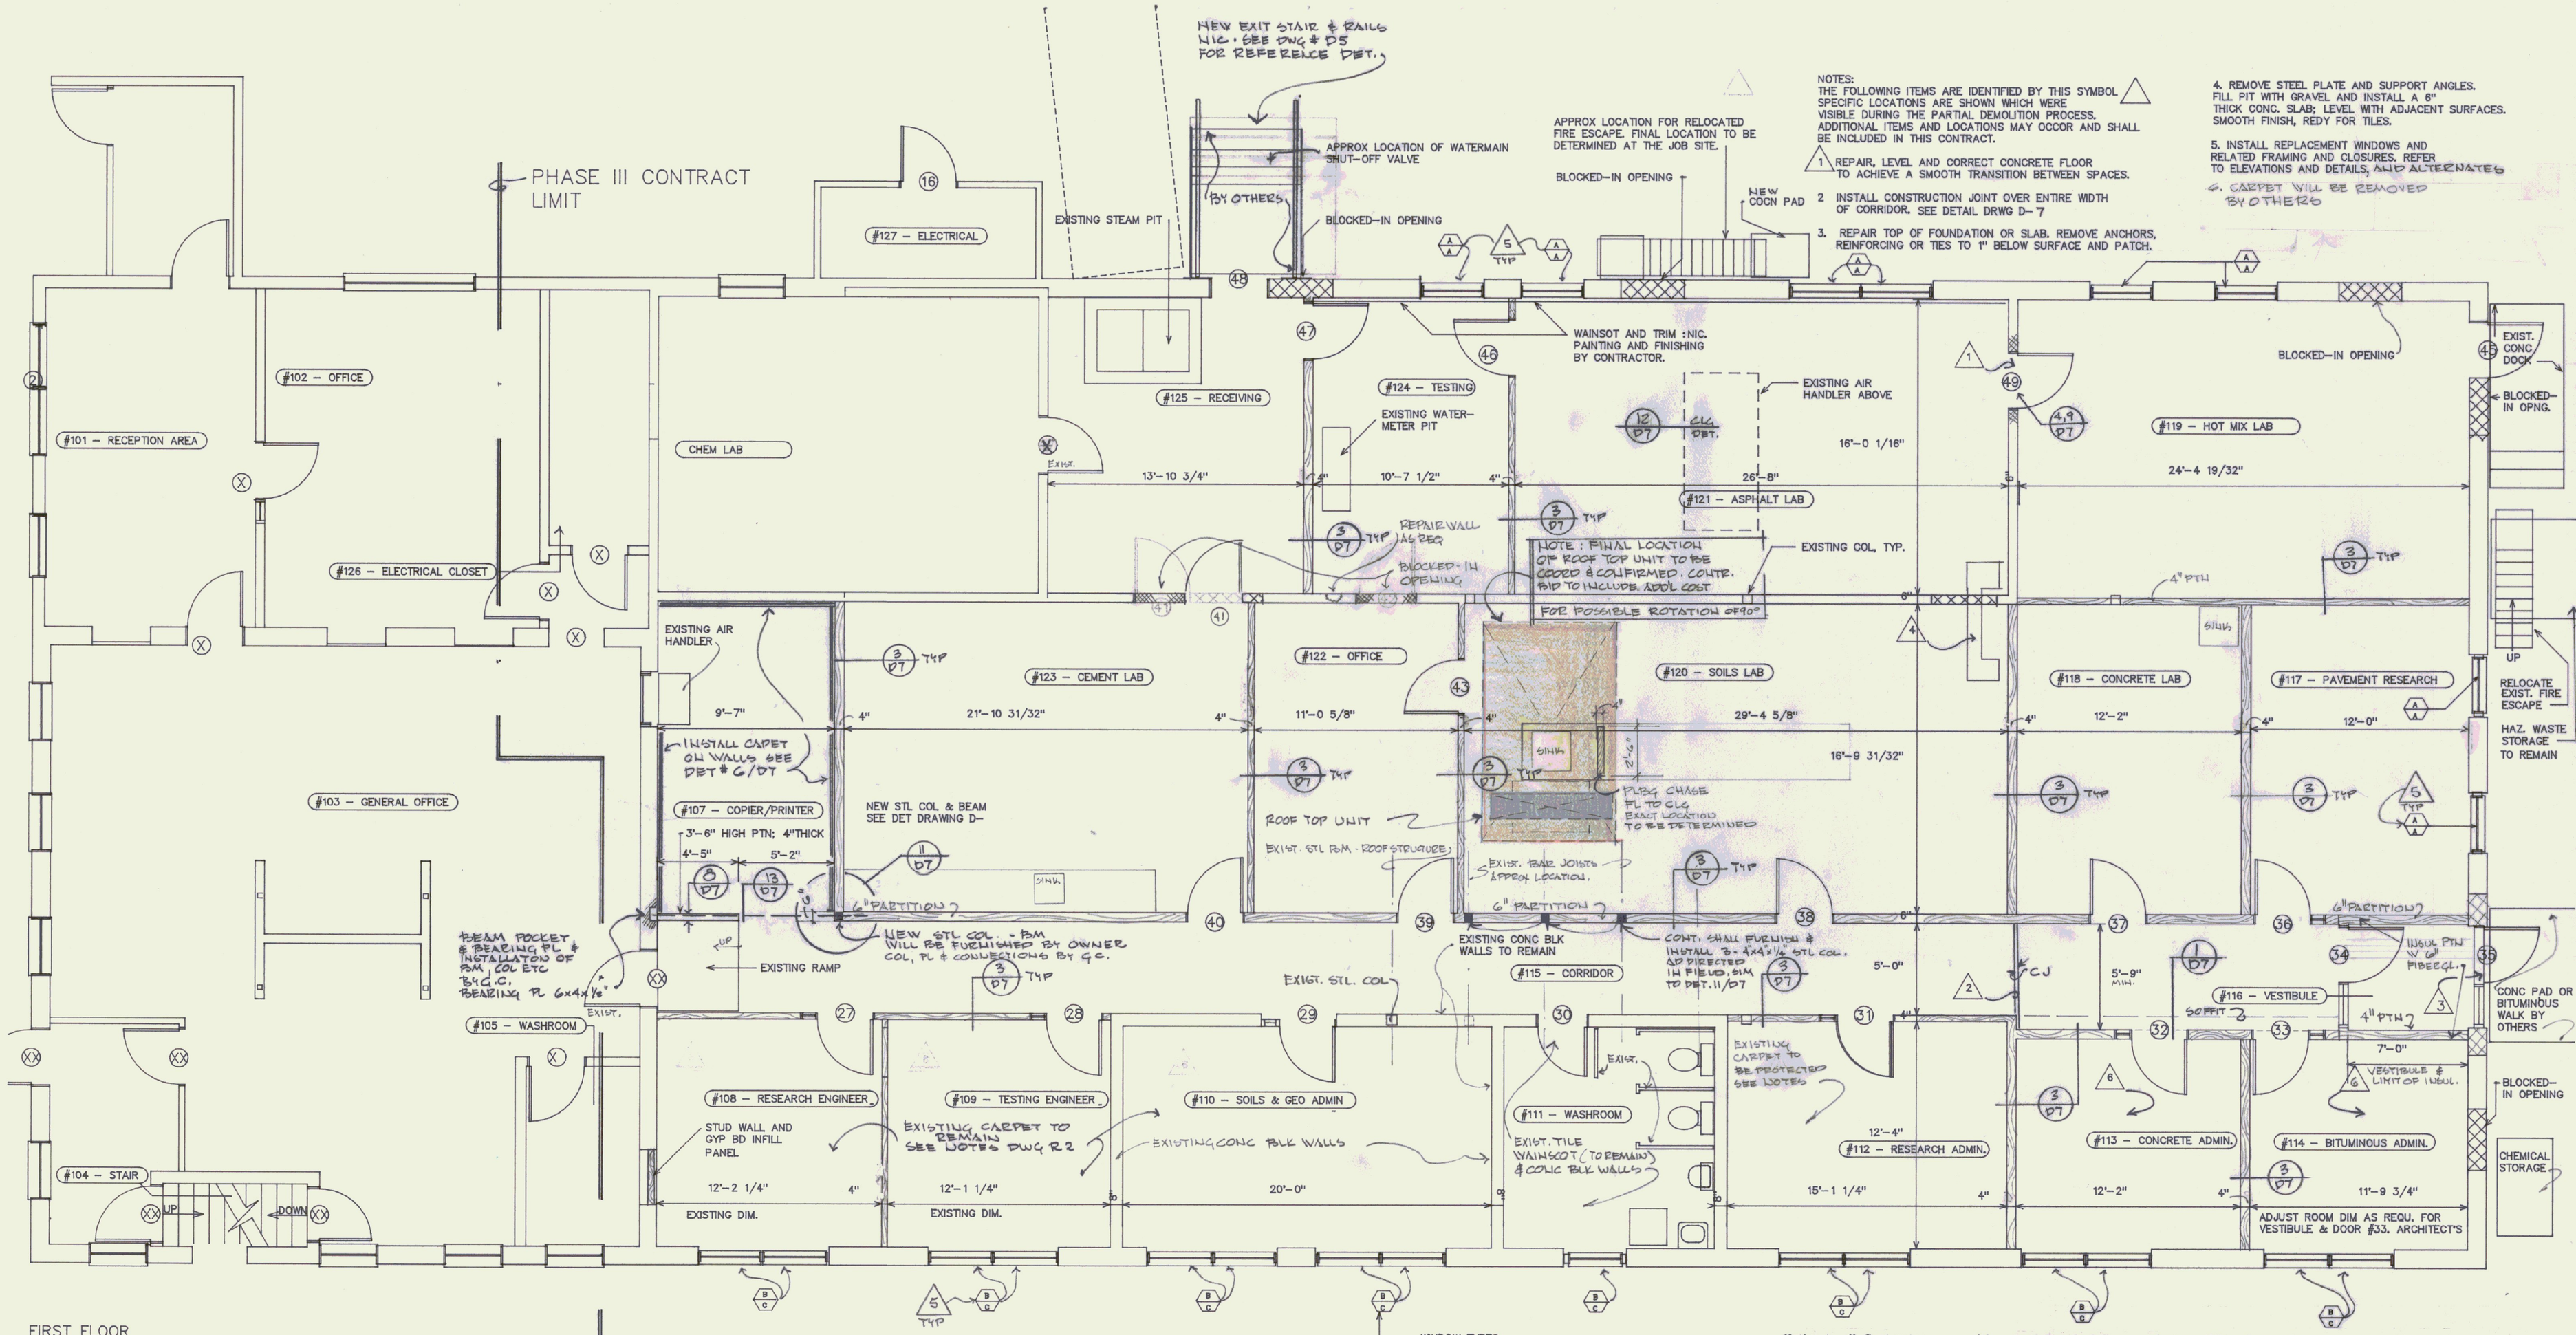

NOTES:
THE FOLLOWING ITEMS ARE IDENTIFIED BY THIS SYMBOL △ SPECIFIC LOCATIONS ARE SHOWN WHICH WERE VISIBLE DURING THE PARTIAL DEMOLITION PROCESS. ADDITIONAL ITEMS AND LOCATIONS MAY OCCOR AND SHALL BE INCLUDED IN THIS CONTRACT.

△ 1 REPAIR, LEVEL AND CORRECT CONCRETE FLOOR TO ACHIEVE A SMOOTH TRANSITION BETWEEN SPACES.

2 INSTALL CONSTRUCTION JOINT OVER ENTIRE WIDTH OF CORRIDOR. SEE DETAIL DRWG D-7

3. REPAIR TOP OF FOUNDATION OR SLAB. REMOVE ANCHORS, REINFORCING OR TIES TO 1" BELOW SURFACE AND PATCH.

4. REMOVE STEEL PLATE AND SUPPORT ANGLES. FILL PIT WITH GRAVEL AND INSTALL A 6" THICK CONC. SLAB; LEVEL WITH ADJACENT SURFACES. SMOOTH FINISH, REDY FOR TILES.

5. INSTALL REPLACEMENT WINDOWS AND RELATED FRAMING AND CLOSURES. REFER TO ELEVATIONS AND DETAILS, AND ALTERNATES

6. CARPET WILL BE REMOVED BY OTHERS

FIRST FLOOR

STATE HIGHWAY LAB

SCALE: 1/4" = 1'-0"

Notice to all Contractors

The Laboratory will remain occupied. Certain areas and equipment will remain operational. The Owner's employees and other Contractors will work in the building during the construction period.

The Contractor shall cooperate with the Owner with regard to scheduling work, shut-down periods, etc.

Sequence of Interior Construction

1. Contractor shall install and partially finish the 6" thick north wall of the entire corridor #115 and vestibule #116. The Contractor shall erect dust partitions in remaining areas at openings.
2. Renovations to the spaces #117 THRU #125 shall be performed next.
3. The remaining offices and related spaces shall be finished last. SEQUENCE AND SCHEDULE MUST BE ADHERED.

NORTH

State of Vermont
Department of State Buildings
John Zampieri, Commissioner

Materials & Research Laboratory
Berlin, Vt.

PHASE III

REGISTERED ARCHITECT FRED KEIL NO. 816 STATE OF VERMONT

Janson Design, Inc.
FRED KEIL, ARCHITECT
P.O. BOX 55 – BOLTON ROAD, WATERBURY, VT 05676
(802) 244-5800

FIRST FLOOR PLAN
REV. 1/20/91 ROOF TOP UNIT, SUPPORTS, DOOR #41, 42, SEQU. OF CONSTR.

DATE: 1/10/91

DWG. NO. A13