
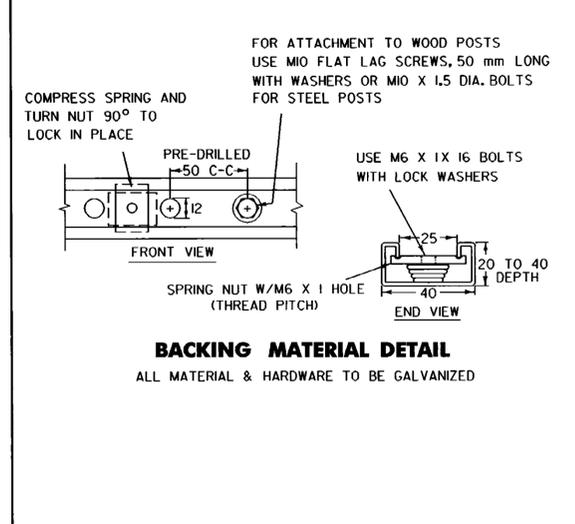


LEGEND	
ITEM	MATERIAL
BL	BONDING LUG (IF STEEL CONDUIT)
CN	CONDUIT NIPPLE
FA	FEMALE ADAPTER OR COUPLINGS AS REQUIRED
GR	GROUND ELECTRODE, 16 X 2400 (MIN) COPPER CLAD (2 REQ.)
GW	GROUND CONDUCTOR, 13.30-mm <sup>2</sup> AWG CU (MIN)
SB	STANDOFF BRACKET (SEE DETAIL)
SJ	SLIP JOINT, INSTALL TWO-THIRDS OPEN
SSS	STAINLESS STEEL STRAP (25 MIN)
SW	90° SWEEPS, (PVC) 900 R. - SERVICE, 600 R. - LOAD
TB	THREADED BUSHING
WH	WEATHERHEAD OR CONDULATOR

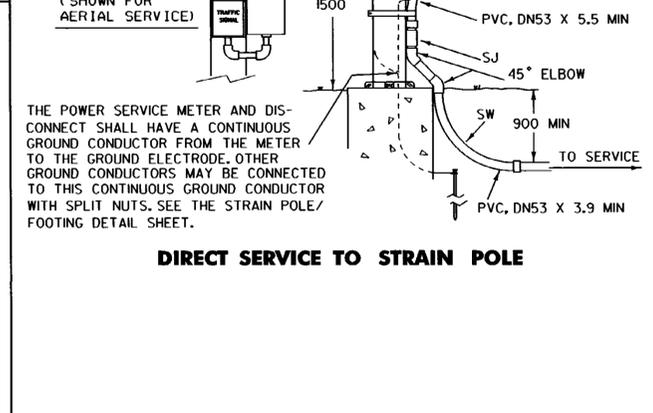

- NOTES**
- ALL CONSTRUCTION MUST COMPLY WITH THE NATIONAL ELECTRICAL CODE AND UTILITY COMPANY REQUIREMENTS.
  - STANCHIONS MUST BE PLACED OUTSIDE THE CLEAR ZONE OR THEY MUST BE PROTECTED BY GUARDRAIL. THE LOCATION OF STANCHIONS MUST BE APPROVED BY THE UTILITY COMPANY PRIOR TO CONSTRUCTION.
  - THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL MATERIALS, EXCEPT FOR STANDOFF BRACKETS WHICH ARE USUALLY FURNISHED AND INSTALLED BY THE UTILITY COMPANY. THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL MATERIALS, EXCEPT THOSE ATTACHED TO THE UTILITY POLE. ALL MATERIAL AND INSTALLATION COSTS FOR THE POWER SERVICE, EXCEPT FOR THE WIRED CONDUIT, SHALL BE CONSIDERED PART OF THE TRAFFIC SIGNAL, STREET LIGHTING OR SIGN ITEM, WHICHEVER IS APPLICABLE.
  - ALL EXPOSED METAL EQUIPMENT MUST BE GROUNDED.
  - ATTACH CONDUIT ON THE SIDE OF THE POLE OR STANCHION AWAY FROM TRAFFIC. CONTACT THE LOCAL UTILITY COMPANY FOR FINAL PLACEMENT.
  - MATERIALS AND DIMENSIONS APPLY TO ALL STANCHIONS.
  - IN RURAL AREAS, WITH THE PERMISSION OF THE UTILITY COMPANY, THE METER AND THE DISCONNECT MAY BE INSTALLED ON AN EXISTING UTILITY POLE. SEE OPTION #4.
  - OPTION #1, #2, #3 OR #5 MAY BE USED IN URBAN AREAS, EITHER RESIDENTIAL OR COMMERCIAL, OR AS DETERMINED BY THE UTILITY AND APPROVED BY THE ENGINEER.
  - THE METER AND DISCONNECT SHALL BE ATTACHED THE STANCHION/POLE WITH TWO LENGTHS OF GALVANIZED BACKING MATERIAL.
  - SERVICE CONDUIT SHALL BE DN53 OR LARGER. SMALLER CONDUIT MAY BE ALLOWED WITH PRIOR APPROVAL FROM THE UTILITY AND THE ENGINEER AND AFTER CONSULTATION WITH THE TRAFFIC & SAFETY DIVISION.
  - WHERE MORE THAN ONE GROUND ELECTRODE IS REQUIRED, THEY SHALL BE A MINIMUM OF 1800 MM APART.
  - METERS MAY NOT BE REQUIRED BY ALL UTILITY COMPANIES.
  - ALL EXPOSED CONDUIT SHALL HAVE A MINIMUM 5.54-mm WALL THICKNESS.
- OTHER STDS. E-171AM REQUIRED (WHEN OPTION #5 IS USED) SEE PLANS FOR OPTION #**  
NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

REVISIONS AND CORRECTIONS  
JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED  
*[Signature]*  
DIRECTOR OF ENGINEERING  
*[Signature]*  
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

# POWER DROP STANCHIONS

