
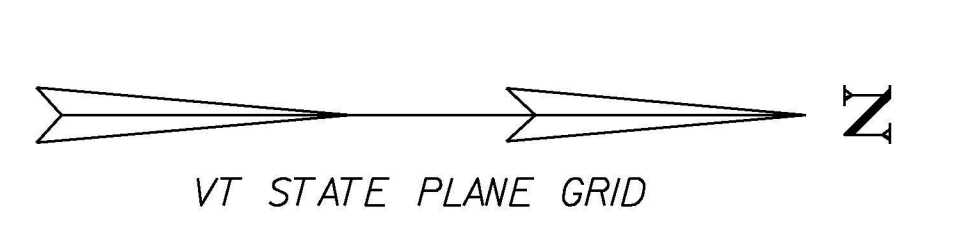


6/2/2013
 P:\CADD\Consultants\z07h124sesc_2C.dgn

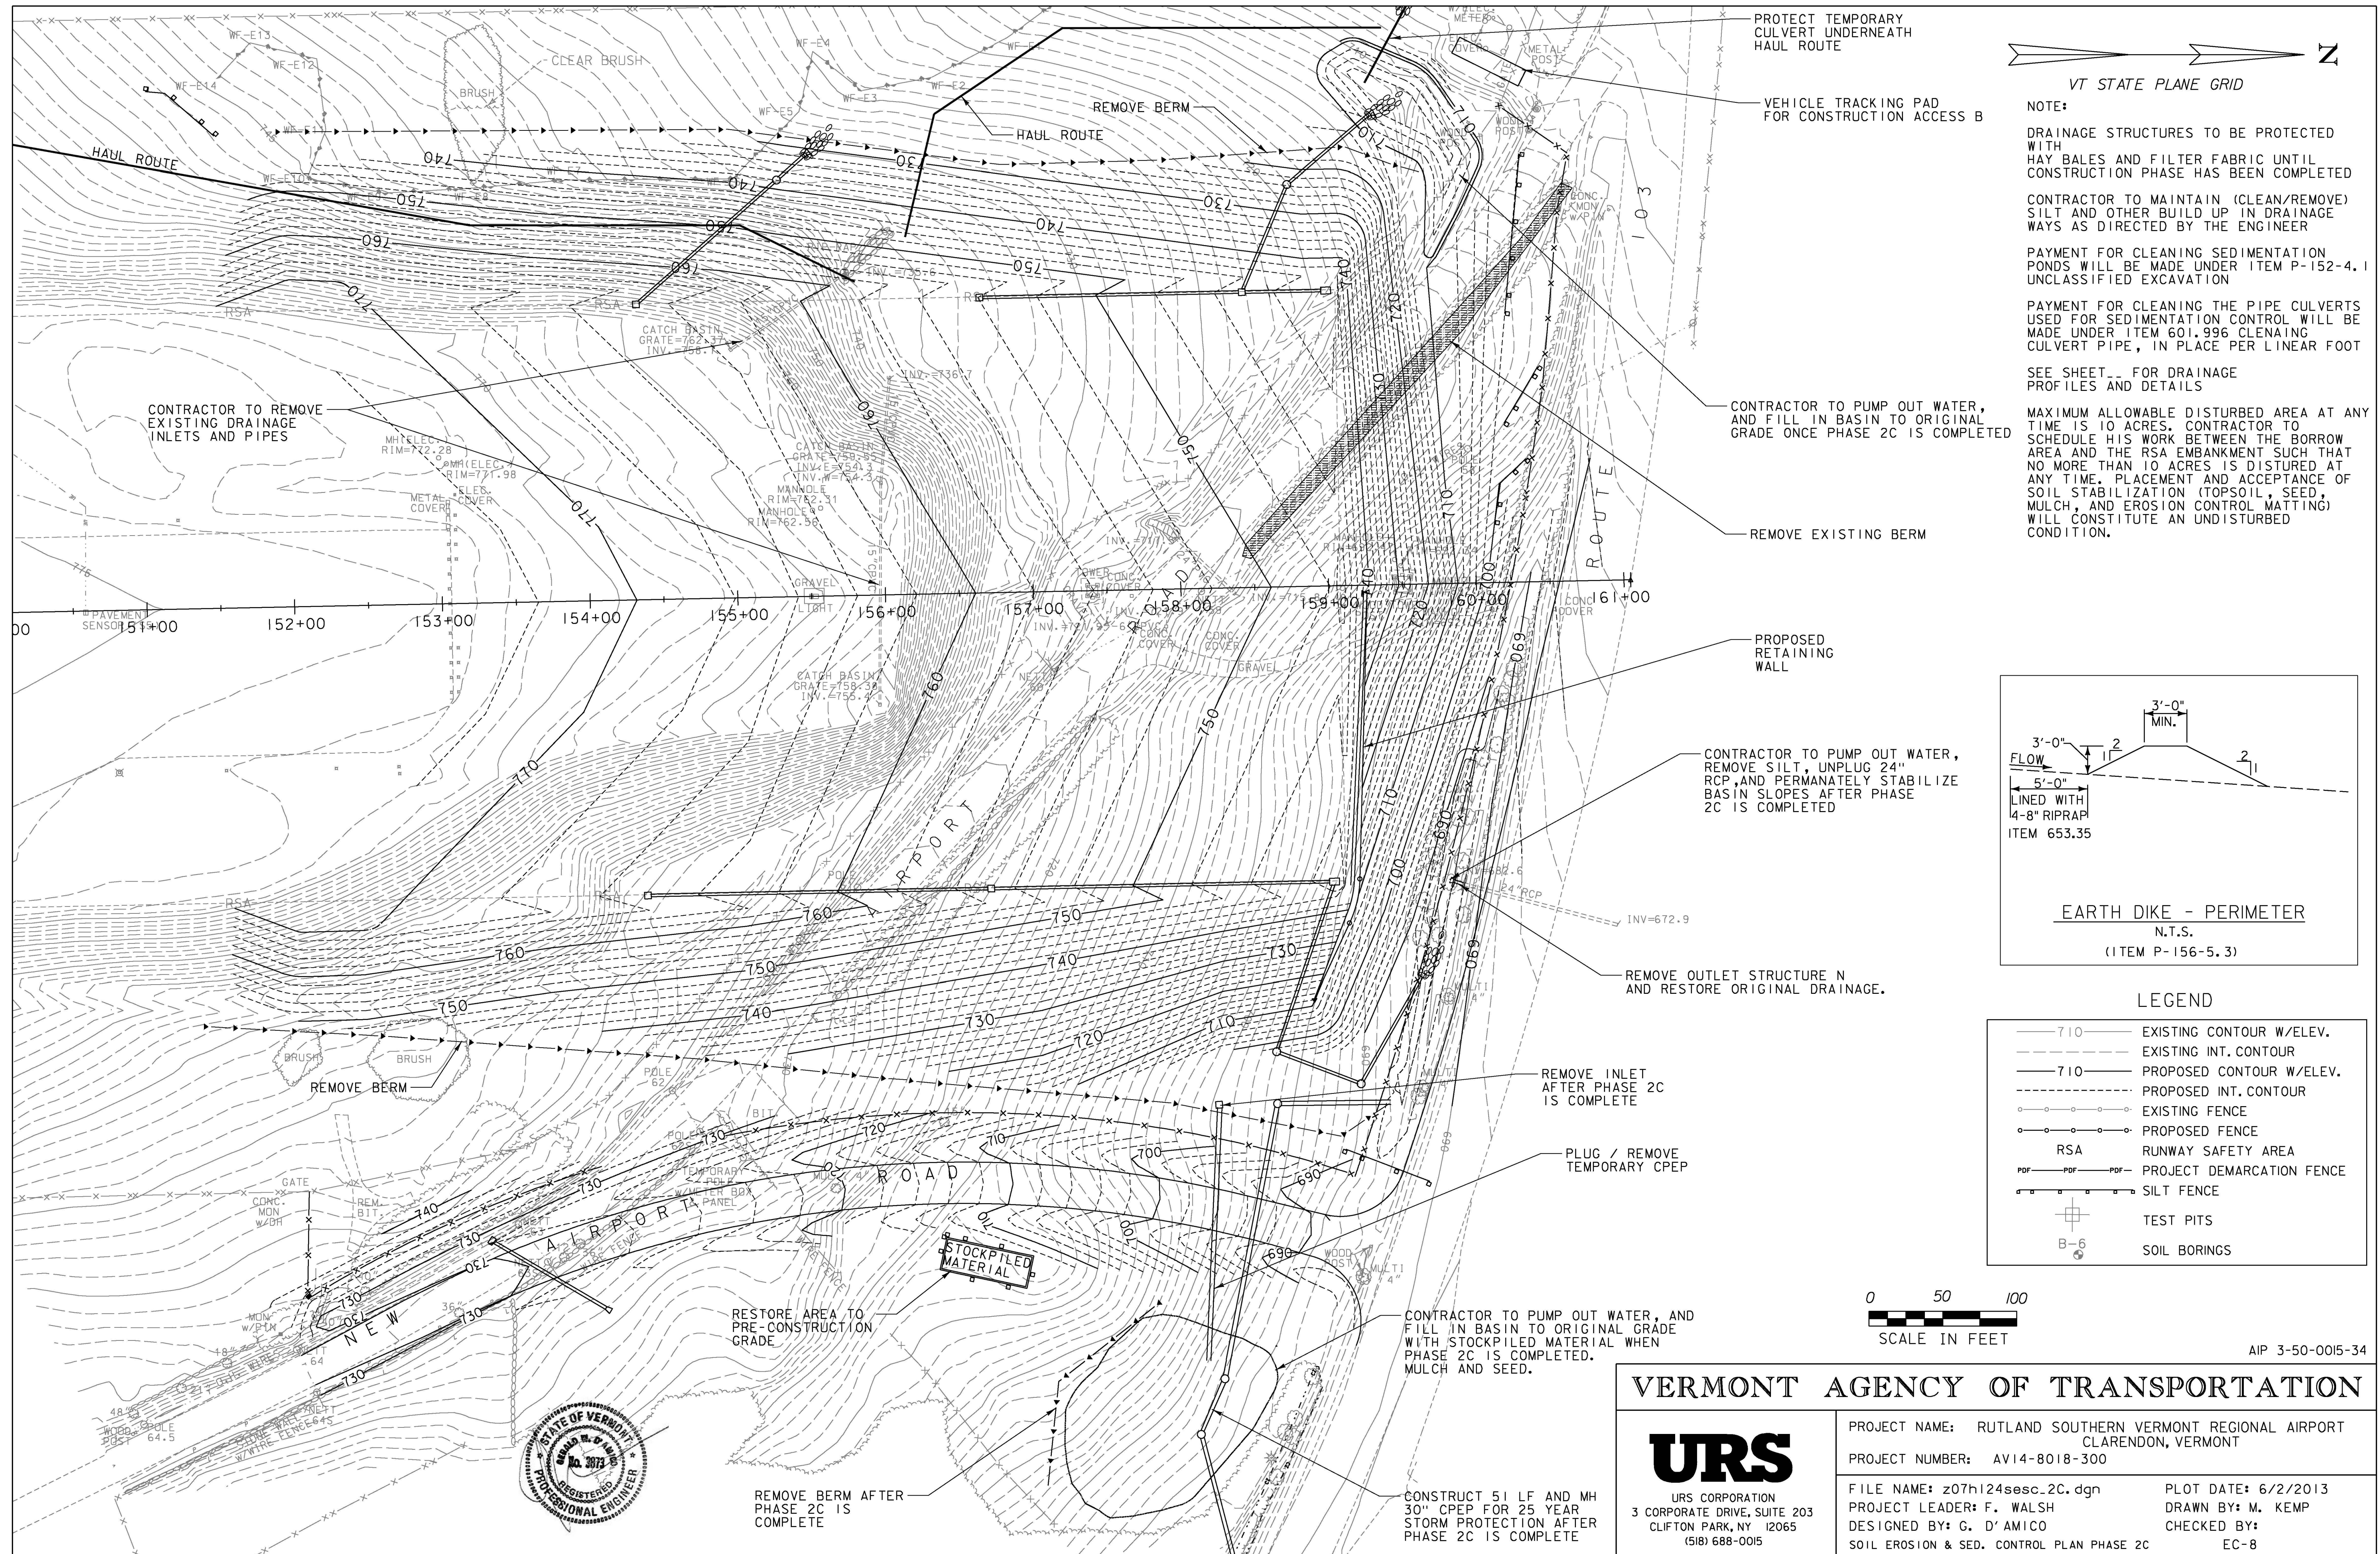

CONTRACTOR TO MAINTAIN (CLEAN/REMOVE) SILT AND OTHER BUILD UP IN DRAINAGE WAYS AS DIRECTED BY THE ENGINEER

PAYMENT FOR CLEANING SEDIMENTATION PONDS WILL BE MADE UNDER ITEM P-152-4.1 UNCLASSIFIED EXCAVATION

PAYMENT FOR CLEANING THE PIPE CULVERTS USED FOR SEDIMENTATION CONTROL WILL BE MADE UNDER ITEM 601.996 CLEANING CULVERT PIPE, IN PLACE PER LINEAR FOOT

SEE SHEET... FOR DRAINAGE PROFILES AND DETAILS

CONTRACTOR TO PUMP OUT WATER, AND FILL IN BASIN TO ORIGINAL GRADE ONCE PHASE 2C IS COMPLETED

REMOVE EXISTING BERM

PROPOSED RETAINING WALL

CONTRACTOR TO PUMP OUT WATER, REMOVE SILT, UNPLUG 24" RCP, AND PERMANENTLY STABILIZE BASIN SLOPES AFTER PHASE 2C IS COMPLETED

REMOVE OUTLET STRUCTURE N AND RESTORE ORIGINAL DRAINAGE.

REMOVE INLET AFTER PHASE 2C IS COMPLETE


PLUG / REMOVE TEMPORARY CPEP

CONTRACTOR TO PUMP OUT WATER, AND FILL IN BASIN TO ORIGINAL GRADE WITH STOCKPILED MATERIAL WHEN PHASE 2C IS COMPLETED. MULCH AND SEED.

CONSTRUCT 51 LF AND MH 30" CPEP FOR 25 YEAR STORM PROTECTION AFTER PHASE 2C IS COMPLETE


REMOVE BERM AFTER PHASE 2C IS COMPLETE

MAXIMUM ALLOWABLE DISTURBED AREA AT ANY TIME IS 10 ACRES. CONTRACTOR TO SCHEDULE HIS WORK BETWEEN THE BORROW AREA AND THE RSA EMBANKMENT SUCH THAT NO MORE THAN 10 ACRES IS DISTURBED AT ANY TIME. PLACEMENT AND ACCEPTANCE OF SOIL STABILIZATION (TOPSOIL, SEED, MULCH, AND EROSION CONTROL MATTING) WILL CONSTITUTE AN UNDISTURBED CONDITION.

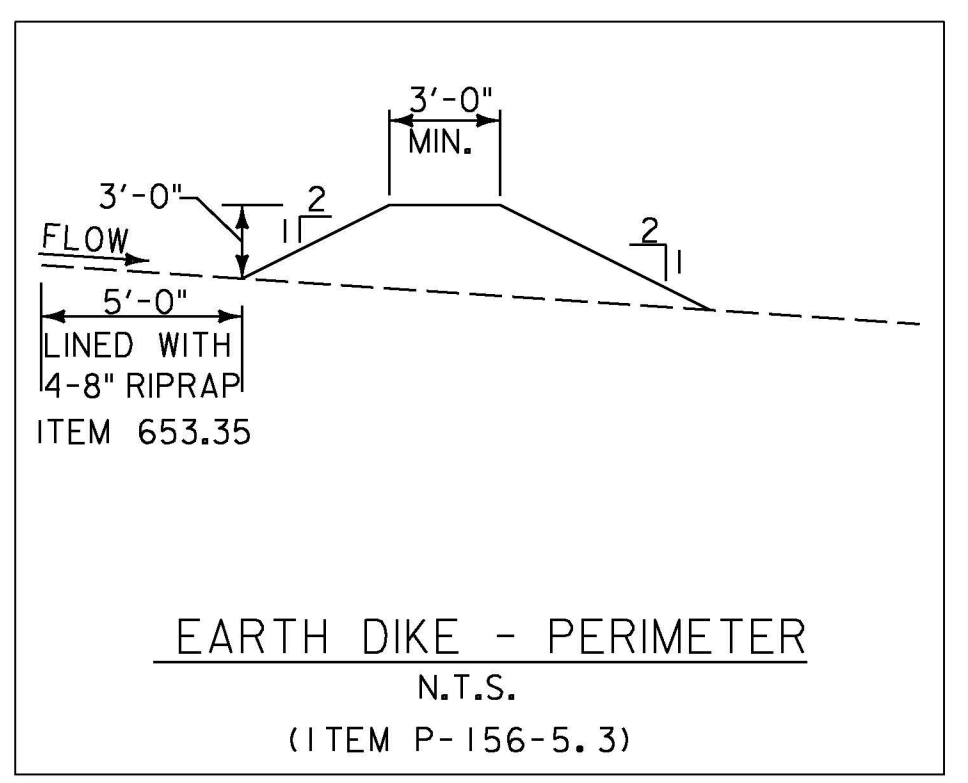

LEGEND

— 710 —	EXISTING CONTOUR W/ELEV.
- - - 710 - - -	EXISTING INT. CONTOUR
— 710 —	PROPOSED CONTOUR W/ELEV.
- - - 710 - - -	PROPOSED INT. CONTOUR
— — — — —	EXISTING FENCE
— — — — —	PROPOSED FENCE
— — — — —	RSA RUNWAY SAFETY AREA
— — — — —	PROJECT DEMARCATION FENCE
— — — — —	SILT FENCE
+	TEST PITS
B-6	SOIL BORINGS

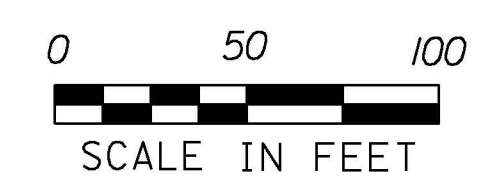

AIP 3-50-0015-34

VERMONT AGENCY OF TRANSPORTATION



PROJECT NAME: RUTLAND SOUTHERN VERMONT REGIONAL AIRPORT
 CLARENDON, VERMONT

PROJECT NUMBER: AV14-8018-300

FILE NAME: z07h124sesc_2C.dgn
 PROJECT LEADER: F. WALSH
 DESIGNED BY: G. D'AMICO
 SOIL EROSION & SED. CONTROL PLAN PHASE 2C

PLOT DATE: 6/2/2013
 DRAWN BY: M. KEMP
 CHECKED BY:
 EC-8

