POOR ORIGINAL COPY

NRH 101-H 1934 9 37 (1935)

NOTE: BACK FILL OF GRAVEL TO BE INCLUDED IN BID PRICE FOR TIMBER CRIBBING

STA. 324+00-325+40 LT.

CONSTRUCT TIMBER CRIB (ITEM 57) SEE SHEET 2 FOR FURTHER DETAILS

BILL OF MATERIAL FOR TIMBER CRIBBING FOR 40 FOOT UNIT

	PINE SILL		BASE		STRETCHER		STRETCHER		HEADERS		HEADERS						BF. TOP	BF. PER
	A		B		C		D		E		F						NO. STCT.	LIN. FT.
	DIA.	LENG.	DIA.	LENG.	DIA.	LENG.	DIA.	LENG.	DIA.	LENGTH	DIA.	LENGTH						
HEIGHT	14"	8'-0"	18"	20'-0"	10"	24'-0"	8"	20'-0"	8"	14'-0"	8'-0"	10"	6'-0"	7'-0"				
5'-0"		14		2		8		4		12		16		16			3148	656

NOTE: QUANTITES ALLOW 1½ LOSS IN HEIGHT DUE TO FRAMING AT EACH BEARING POINT.

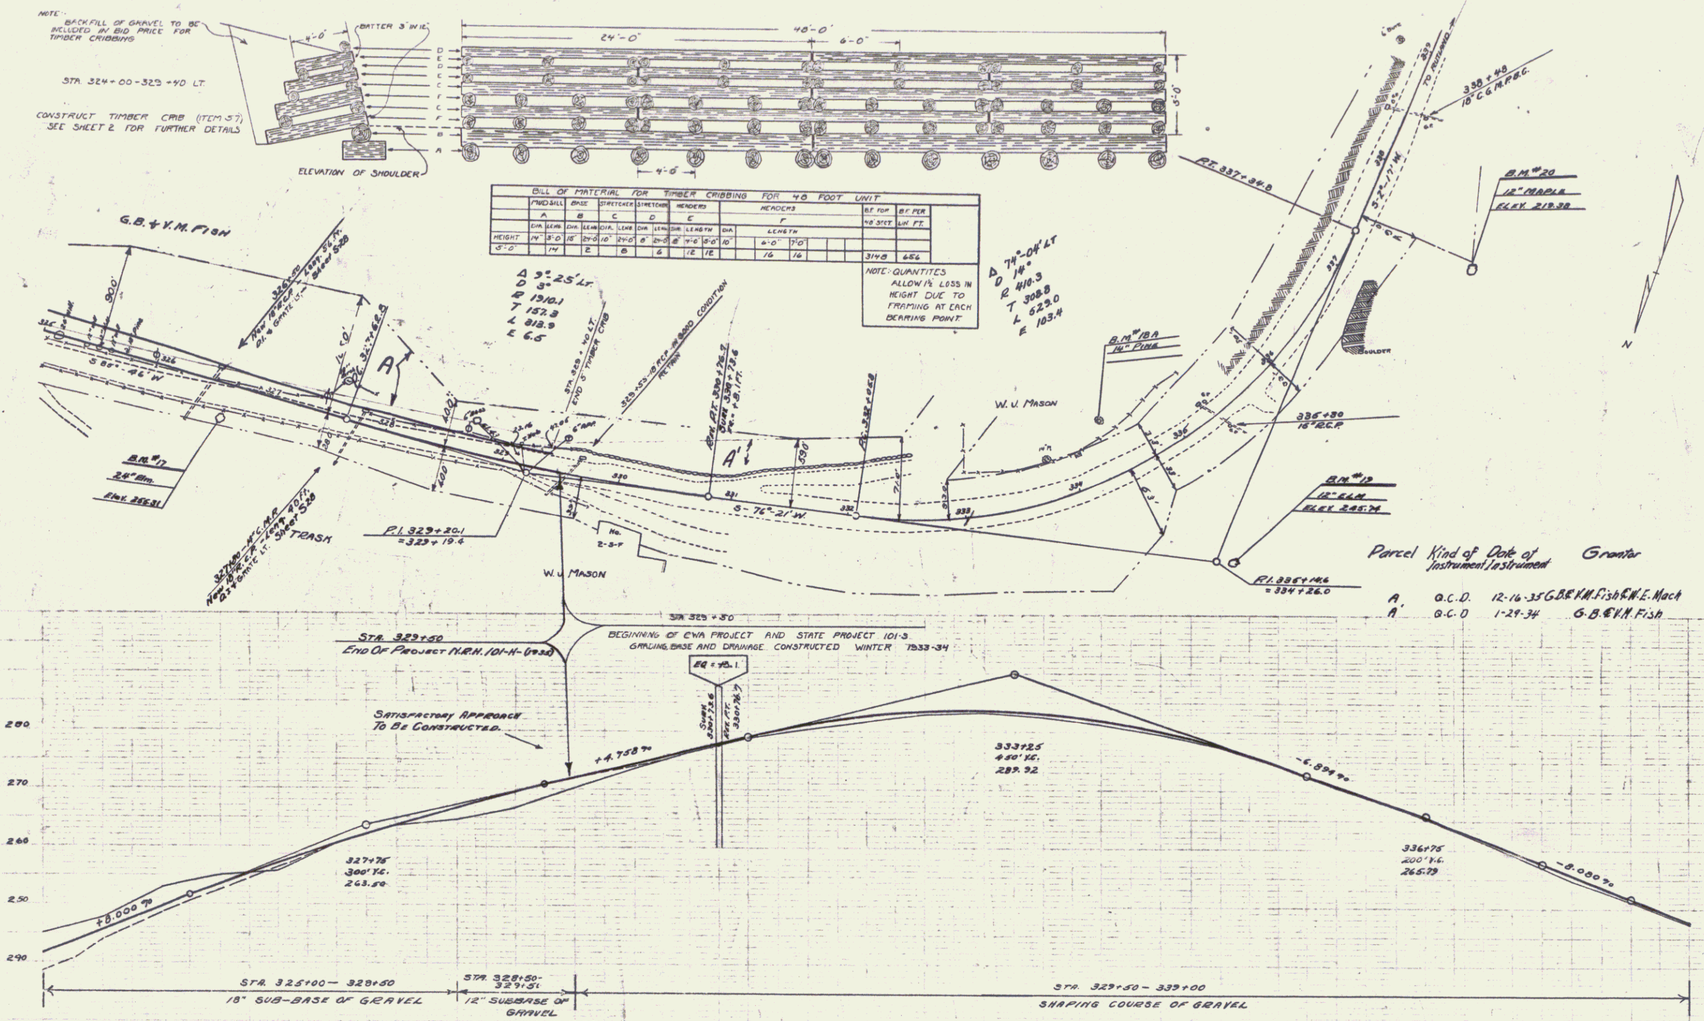

Parcel	Kind of Instrument	Date of Instrument	Grantor	Grantee	Recorded BOOK	PAGE	DATE
A	Q.C.D.	12-16-35	G.B.& Y.M. Fish & W.E. Mack	St. of N.H.	29	217	1-3-36
A'	Q.C.D.	1-29-34	G.B.& Y.M. Fish	"	27	466 / 467	2-1-34

B.M. #17 Spike in Side of 24" Elm 17' Rt. of Sta. 326+57 Elev. 255.31
B.M. #18 " " Root of 14" Y. Oak Rt. of Sta. 330+96.6 " 262.65 (Not Located on Topo.)
B.M. #19 " " " " 12" Elm 112' Rt. of Sta. 334+60 " 245.74
B.M. #20 " " " " 12" Maple 103' Rt. of Sta. 337+40 " 217.38

SERIES N.R.H. No. 101-H (1935) SHEET 9 OF 37

7