STATE OF VERMONT
AGENCY OF TRANSPORTATION

R.O.W. PLANS

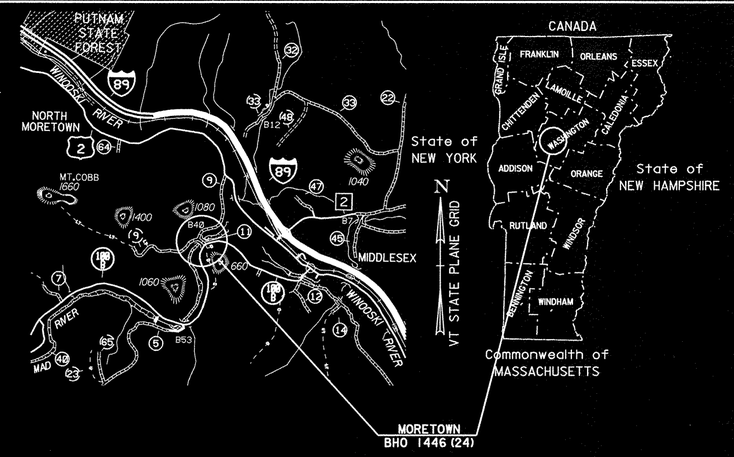

BEGIN R.O.W. PROJECT

BHO 1446(24)

STA. 1+000 7.5M (24.75') LT.

TOWN OF MORETOWN
COUNTY OF WASHINGTON

ROUTE NO : TH 11 CL 3 BRIDGE NO : BR 40

PROJECT LOCATION : LOCATED IN THE COUNTY OF WASHINGTON, TOWN OF MORETOWN ON TH 11, BR 40 APPROXIMATELY 125 METERS NORTHERLY OF THE INTERSECTION OF TH 11 AND VT ROUTE 100B

PROJECT DESCRIPTION : THE PROJECT SHALL CONSIST OF THE REHABILITATION OF THE EXISTING TRUSS WITH NEW ABUTMENTS INCLUDING THE RELATED APPROACH ROADWAY AND CHANNEL WORK.

LENGTH OF STRUCTURE :	23.450 METERS	
LENGTH OF ROADWAY :	16.550 METERS	
LENGTH OF PROJECT :	40.000 METERS	
LENGTH OF R.O.W. PROJECT	67.500 METERS	(221.5')

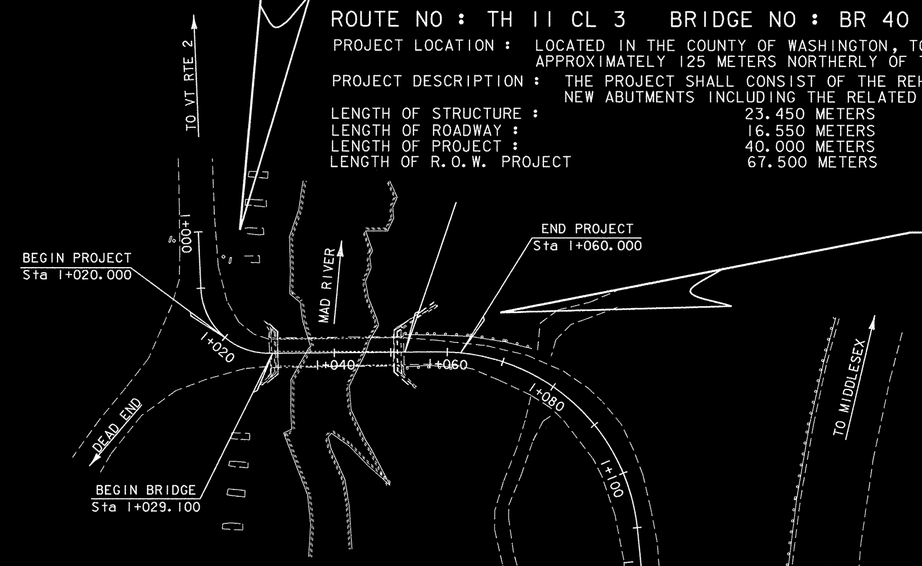

END R.O.W. PROJECT

BHO 1446(24) STA. 1+067.5 8.2M (27') LT.

SCOPE OF WORK

1) THE BRIDGE WILL BE CLOSED TO TRAFFIC DURING CONSTRUCTION.
2) REMOVE EXISTING DECK AND TRUSS FLOOR SYSTEM.
3) MOVE TRUSSES TO STAGING AREA TO BE REPAIRED AS NECESSARY.
4) BUILD NEW SUBSTRUCTURES.
5) INSTALL TRUSSES ON NEW SUBSTRUCTURES WITH NEW FLOOR BEAMS AND CONCRETE DECK.
6) CONSTRUCT NECESSARY APPROACH WORK INCLUDING NEW APPROACH RAILING.
7) REMOVE 100% OF EXISTING PAINT SYSTEM AND INSTALL NEW PAINT SYSTEM WITH FINAL COLOR TO BE GREEN COLOR CHIP #14062.

CONVENTIONAL SIGNS

COUNTY LINE
TOWN LINE
LIMITS OF ACCESS
POINT OF ACCESS
FENCE LINE
STONE WALL
TRAVELED WAY
GUARD RAIL
RAILROAD
SURVEY LINE
CULVERT
POWER POLE
TELEPHONE POLE
TREES
CONTROL OF ACCESS
PROPERTY LINE
R.O.W. TAKING LINE
SLOPE RIGHTS SR
TOP OF CUT
TOE OF SLOPE

DATUM

VERTICAL _____

HORIZONTAL _____

VTrans Metric

UNLESS NOTED OTHERWISE
STATIONS ARE IN KILOMETERS
ELEVATIONS ARE IN METERS
DIMENSIONS ARE IN MILLIMETERS

THESE PLANS ARE SUBJECT TO SUCH ENGINEERING CHANGES AS MAY BE REQUIRED BY THE FEDERAL HIGHWAY ADMINISTRATION OR THE DIRECTOR OF PROJECT DEVELOPMENT.

CONSTRUCTION IS TO BE CARRIED ON IN ACCORDANCE WITH THESE PLANS AND THE STANDARD SPECIFICATIONS FOR CONSTRUCTION DATED 1995, AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION ON AUGUST 21, 1995 FOR USE ON THIS PROJECT, INCLUDING ALL SUBSEQUENT REVISIONS AND SUCH REVISED SPECIFICATIONS AND SPECIAL PROVISIONS AS ARE INCORPORATED IN THESE PLANS.

APPROVED _____ DATE 12/5/00
Director of Project Development

APPROVED _____ DATE 12/4/00
Chief, Right of Way

MORETOWN
BHO 1446 (24)
R.O.W. SHEET 1 OF 8 SHEETS

9J5112