MATERIAL TOLERANCES	
MATERIAL ITEM	THICKNESS TOLERANCE
PAVEMENT (TOTAL DEPTH)	¾"
SUBBASE	1"
SAND	1"

** NOTE
THE PERFORMANCE-GRADED (PG) ASPHALT BINDER SHALL BE EITHER PG 70-28, OR IN ACCORDANCE WITH SECTION 490 OF THE GENERAL SPECIAL PROVISIONS.

TYPICAL SECTIONS

1½" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT TYPE IVS (PG 70-28)**
1½" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT TYPE IVS (PG 70-28)**
3" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT TYPE IIS (PG 70-28)**
3" SUPERPAVE BITUMINOUS CONCRETE PAVEMENT TYPE IIS (PG 70-28)**
24" SUBBASE OF DENSE GRADED CRUSHED STONE

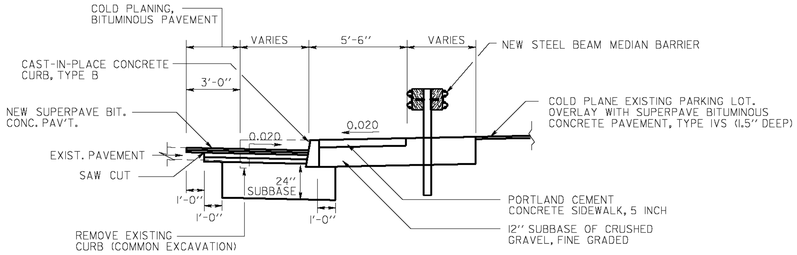

1½" SUPERPAVE BIT. CONC. PAV'T TYPE IVS
1½" SUPERPAVE BIT. CONC. PAV'T TYPE IVS
3" SUPERPAVE BIT. CONC. PAV'T TYPE IIS
3" SUPERPAVE BIT. CONC. PAV'T TYPE IIS
24" SUBBASE OF DENSE GRADED CRUSHED STONE

ROADWAY WIDENING (ELM & SUUMER STREET.)
N.T.S.
STA. 421+55 RT - 706+22, LT

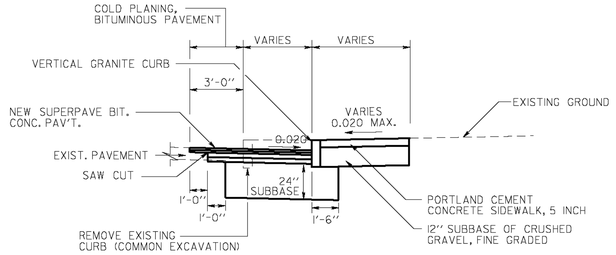

1½" SUPERPAVE BIT. CONC. PAV'T TYPE IVS
1½" SUPERPAVE BIT. CONC. PAV'T TYPE IVS
3" SUPERPAVE BIT. CONC. PAV'T TYPE IIS
3" SUPERPAVE BIT. CONC. PAV'T TYPE IIS
24" SUBBASE OF DENSE GRADED CRUSHED STONE

ROADWAY WIDENING (AREAS 2 & 5 IMPROVEMENTS)
N.T.S.

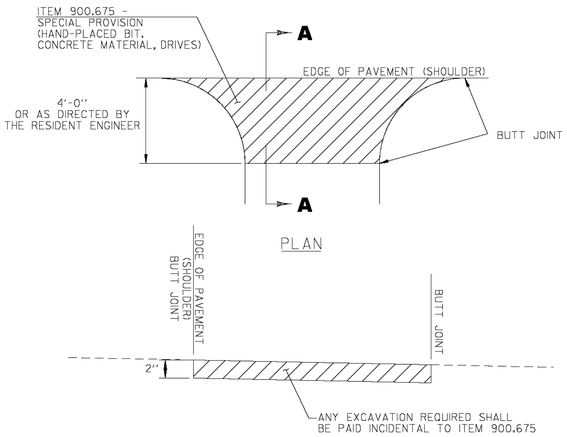

SECTION A-A

HANDWORK DETAILS FOR PAVED DRIVES

STATION	POSITION	QUANTITY (SY)
SL 24+39	LT	21.4
SL 400+78	LT	38.1
SL 401+19	RT	6.7
SL 422+11	LT	6.2

PROJECT NAME:	BARRE CITY
PROJECT NUMBER:	FEGC F 026-1(34) C/1
FILE NAME: z09B240_TYP.dgn	PLOT DATE: 4/5/2010
PROJECT LEADER: G. BAKOS	DRAWN BY: DMP / JAR
DESIGNED BY: DMP / MDS	CHECKED BY:
TYPICAL SECTIONS	SHEET 4 OF 95

VHB Vanasse Hangen Brustlin, Inc.