DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) 1.75 (LB / FT) 1.88	SQUARE STEEL (IN) 2.00 (LB / FT) 2.42	SQUARE STEEL (IN) 2.50 (LB / FT) 3.35	TUBULAR STEEL Ø (IN) FOUNDATION	TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60	TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00	TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80	TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL IN SHS	SIGN DETAIL: DETAIL ON SHEET NUMBER	SIGN DETAIL: DETAIL ON STD SHEET NUMBER
WAITSFIELD VT 100							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHS"-STANDARD HIGHWAY SIGNS			
NB	0.000	C	VD-024	60	7.5								1		X													
		C	VD-024	72	10		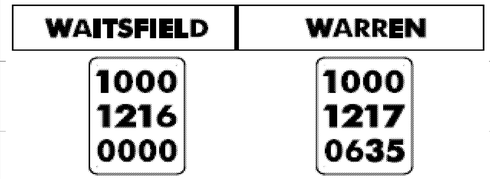	5.00								2		X								INSTALL THE NEW TOWN LINE SIGN IN THE SAME POSITION AS THE REMOVAL, ON 2 NEW POSTS		4	
		C	VD-700	6	10			0.42																		WAITSFIELD MILE MARKER; INSTALL ON THE LEFT POST UNDER WAITSFIELD			E-138
		C	VD-700	6	10			0.42																		WARREN MILE MARKER; INSTALL ON THE RIGHT POST UNDER WARREN			E-138
NB	0.300	A	VD-062AL	72	16		BUSINESS SIGN			1				X														
		A	VD-062AL	72	16		BUSINESS SIGN			1																		
NB	0.379	A	VW-060	30	30								1		X														
		A	VW-060	30	30			6.25								1		X									7	
NB	0.400	C	VR-017	24	30								1		X												BUNDY RD (TH-32)			
		C	VR-017	24	30			5.00								1		X										E-141
NB	0.408	D	R1-1	30	30								1		X												BUNDY RD (TH-32)			
		D	R1-1	30	30			6.25								1		X									X	
NB	0.443	A	W1-4R	30	30		REVERSE CURVE RIGHT						1		X														
NB	0.490	A	W1-4R	30	30			6.25								1		X								INSTALL BEHIND RAIL 250 FT± NORTH OF PREVIOUS POSITION	X	
NB	0.510	A	W11-3	30	30		DEER CROSSING						1		X												X	
							SHEET TOTALS	29.59 SF	0.00 SF	2 EA	0 EA	0 EA	6 EA	0 EA	0 EA	6 EA	90 FT											
							TOWN TOTALS	684.6	0.0	99.0	18.0	18.0	141	0.0	0.0	129	1935.0											

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: **Ludlow-Waitsfield VT100**
PROJECT NUMBER: **STPG SIGN(27)**

FILE NAME: **Waitsfield.xls**
PROJECT MANAGER: **N. Avery**
DESIGNED BY: **M. Miller**
WAITSFIELD SHEET 1

PLOT DATE: **9/15/2009**
DRAWN BY: **I. Shea**
CHECKED BY: **N. Avery**