

GEOTEXTILE FOR SILT FENCE
 STA. 10+59, RT. - STA. 11+21, RT.
 STA. 10+91, RT. - STA. 11+16, RT.

PROJECT DEMARCATION FENCE
 STA. 10+29, LT - 13+04, RT.

TEMPORARY STONE CHECK DAM, TYPE I
 STA. 10+72, LT - STA. 13+03, LT.


VEHICLE TRACKING PAD
 STA. 10+76, RT.
 STA. 12+80, RT.

INLET PROTECTION DEVICE, TYPE J
 STA. 10+53, LT. (PIPE INLET PROTECTION)
 STA. 11+11, RT.

INLET PROTECTION DEVICE, TYPE II
 STA. 10+64, RT.


EPSC GENERAL NOTES:

1. THESE PLANS SHOW A CONCEPTUAL EROSION CONTROL PLAN, THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR ACCEPTANCE.
2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN, THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE ENGINEER AND ON-SITE PLAN COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE ENGINEER AND ON-SITE PLAN COORDINATOR.
4. REFER TO EPSC DETAILS AND EPSC NARRATIVE FOR ADDITIONAL REQUIREMENTS.

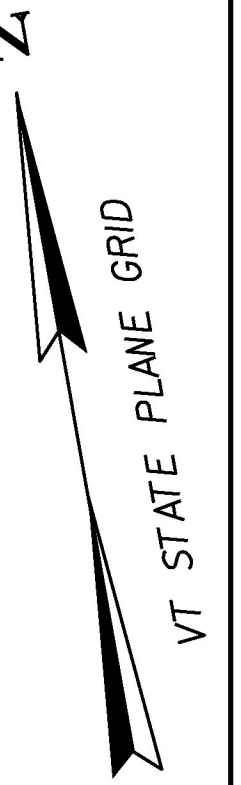

GENERAL CONSTRUCTION SEQUENCE

1. DEMARCATATE WORK ZONE WITH PROJECT DEMARCATION FENCE (PDF) AS SHOWN ON THE PLANS. FENCE INSTALLED NO MORE THAN 10' BEYOND CONSTRUCTION LIMITS UNLESS APPROVED BY THE ENGINEER.
2. CLEAR AND GRUB THE SITE. DO NOT REMOVE STUMPS, EXCESS SOILS, AND OTHER WASTE MATERIALS UNTIL TEMPORARY EPSC MEASURES HAVE BEEN INSTALLED.
3. INSTALL TEMPORARY EROSION PREVENTION AND SEDIMENT CONTROL MEASURES, AS SHOWN, AS REQUIRED, OR AS DIRECTED BY THE ON-SITE PLAN COORDINATOR, IN THE FOLLOWING ORDER:
 - A. STABILIZED CONSTRUCTION ENTRANCE VEHICLES ARE REQUIRED TO DRIVE OVER THE 50' SCE BEFORE EXITING THE CONSTRUCTION LIMITS.
 - B. INLET PROTECTION ON EXISTING DROP INLETS AND CATCH BASINS.
 - C. STONE CHECK DAMS (SEE EPSC DETAILS).
 - D. SILT FENCE AND EROSION MATTING (SEE EPSC DETAILS).
4. DISPOSE OF STUMPS, EXCESS SOILS AND OTHER WASTE MATERIAL IN ACCORDANCE WITH SUBSECTION 105.25.
5. COMPLETE CONSTRUCTION OF NEW PARK-AND-RIDE LOT.
 - A. INSPECT AND MAINTAIN EROSION PREVENTION AND SEDIMENT CONTROL MEASURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
 - B. DISPOSE OF COLLECTED SEDIMENT AND OTHER POLLUTANTS IN A MANNER APPROVED BY THE ENGINEER THAT WILL NOT RESULT IN SEDIMENTS AND POLLUTANTS ENTERING WATERS OF THE STATE.
6. PERMANENTLY STABILIZE ALL FINISHED GRADES AS EARTHWORK IS COMPLETED.

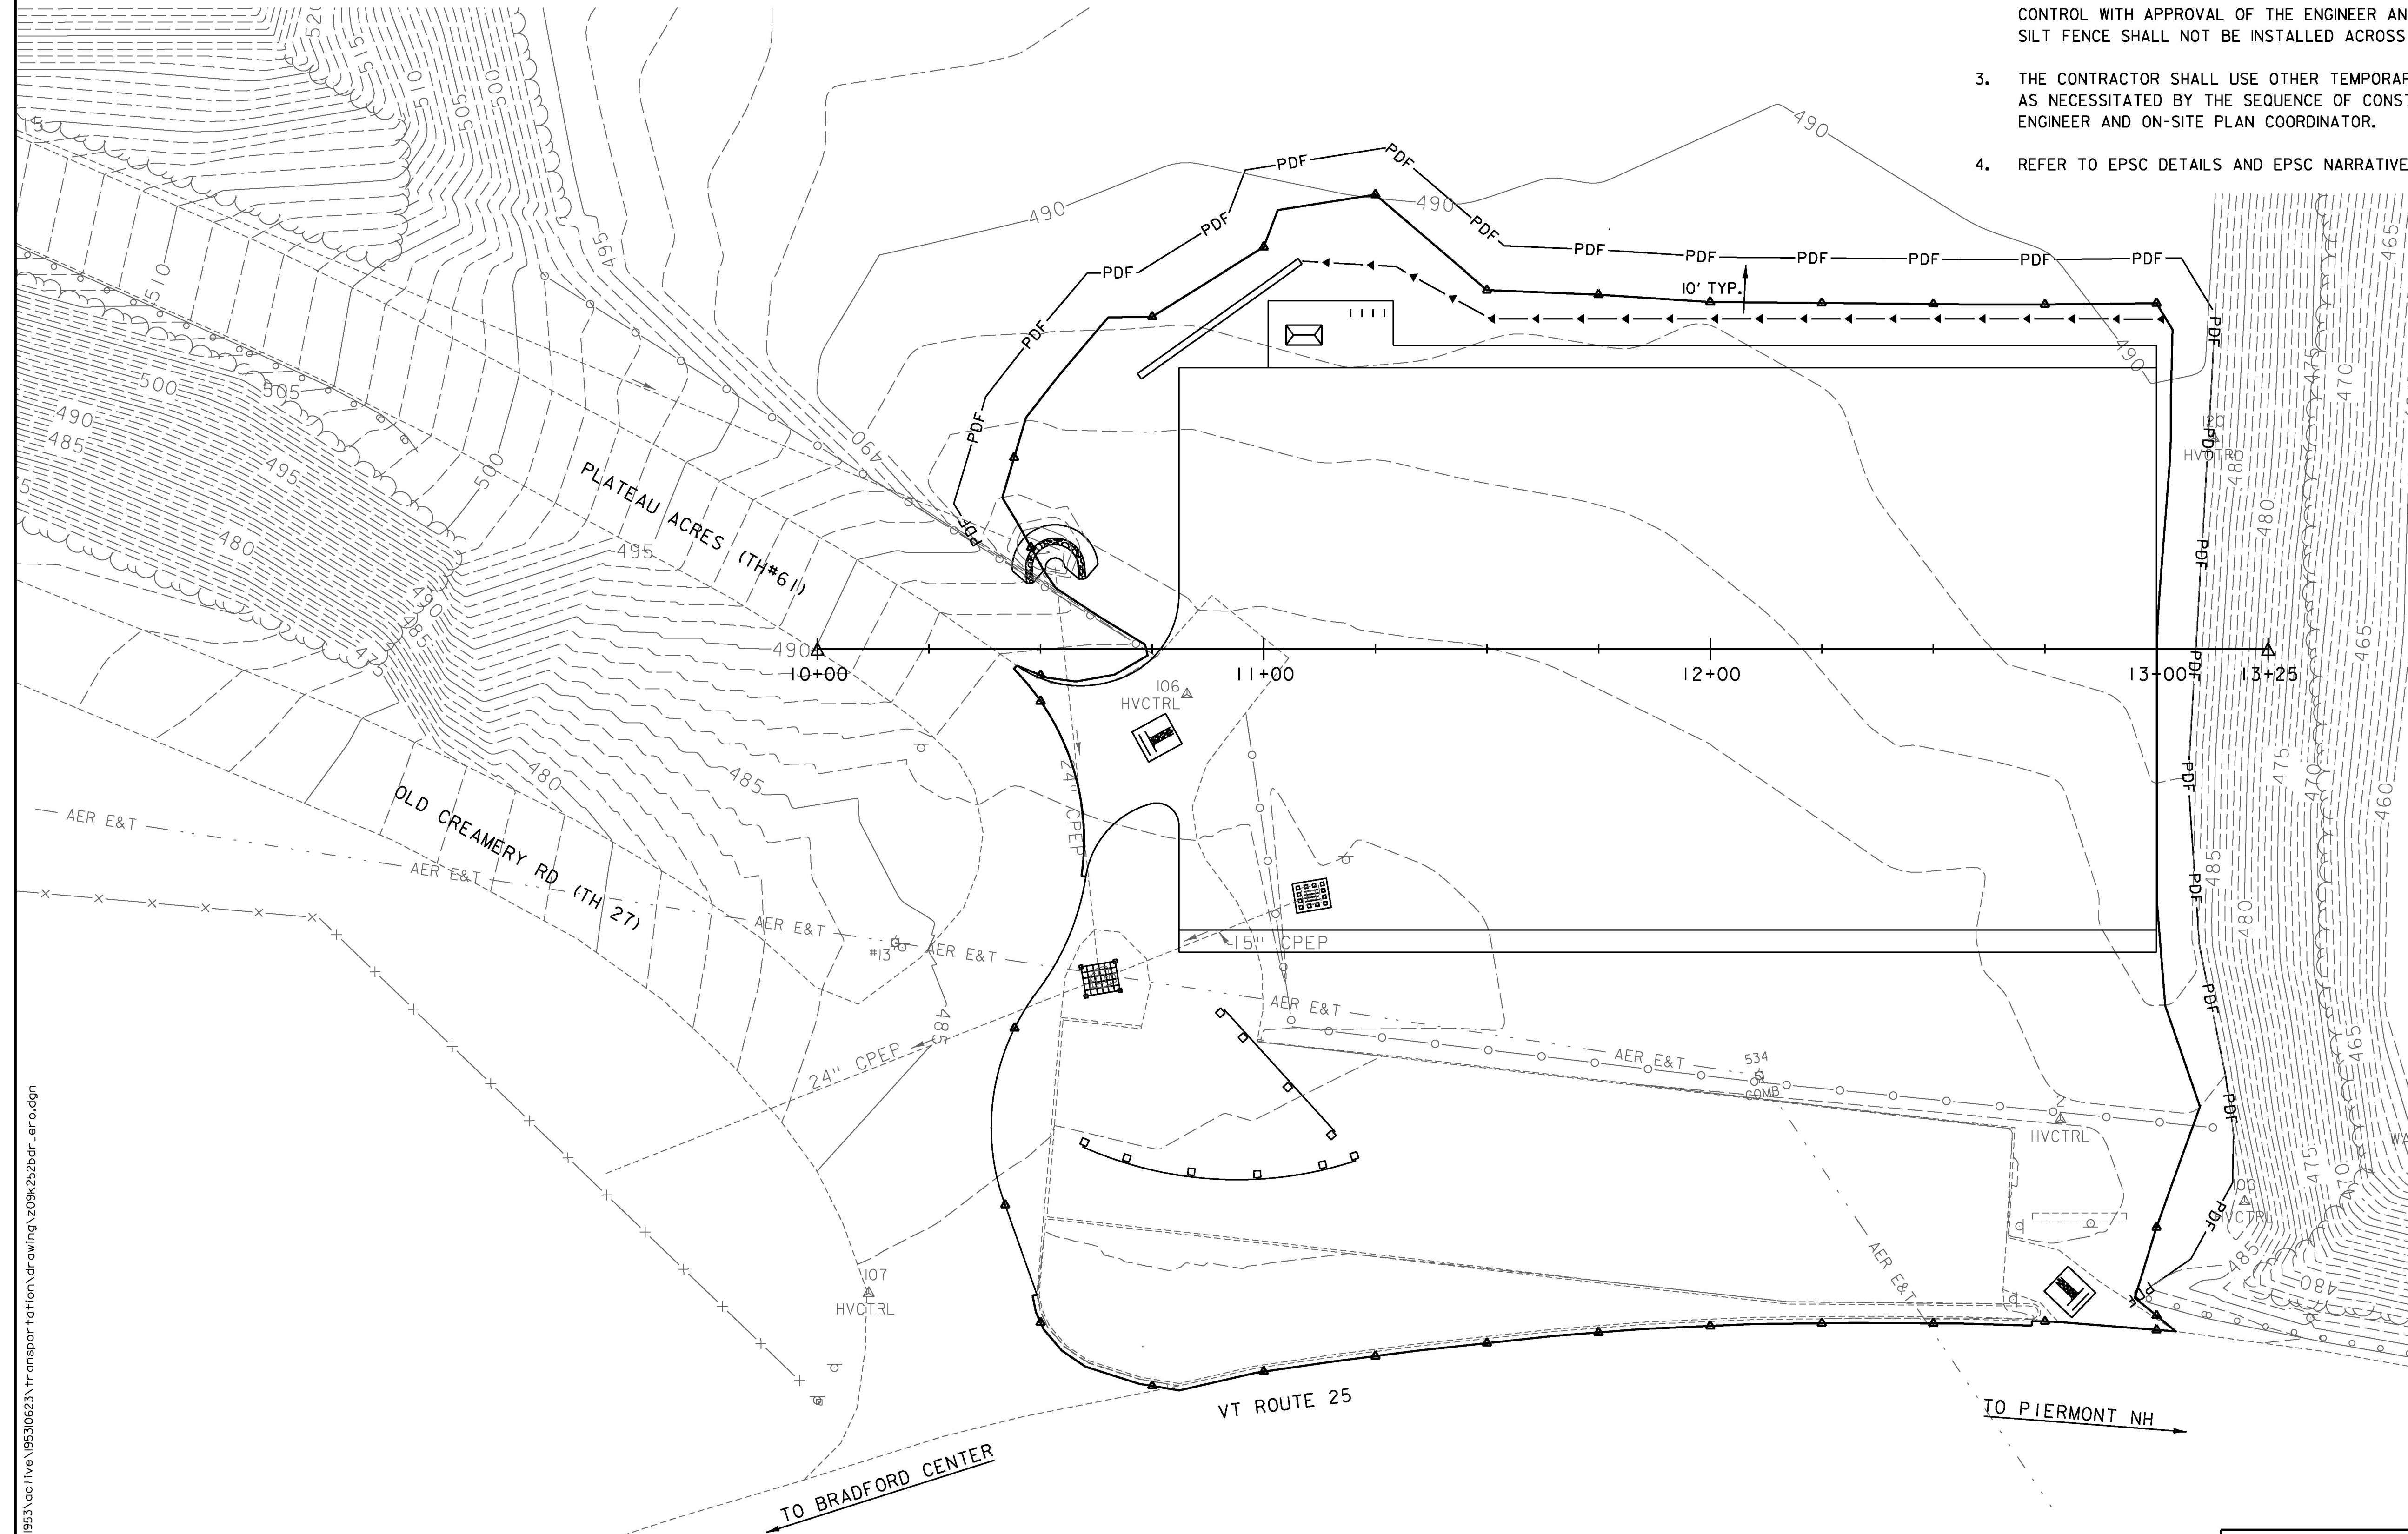

5/22/2014 4:49:46 PM W:\953\active\19530623\transport\ton\drawing\z09k252bdr_ero.dgn

0 20 40
 SCALE
 1"=20' @ FULL SIZE

PROJECT NAME: BRADFORD	PLOT DATE: 5/22/2014
PROJECT NUMBER: CMG PARK (33)	DRAWN BY: P. ARMATA
FILE NAME: z09k252bdr_ero.dgn	CHECKED BY: G. SANTY
PROJECT LEADER: M. FOISY	DESIGNED BY: I. MAYNARD
EPSC CONSTRUCTION SITE PLAN	SHEET 29 OF 33