

CONSTRUCTION LEGEND:

STONE FILL, TYPE II	
SILT FENCE	
TEMPORARY EROSION MATTING	
TEMPORARY STONE CHECK DAM, TYPE I	
STABILIZED CONSTRUCTION ENTRANCE	
SURFACE ROUGHENING	
BARRIER FENCE	
LIMITS OF SOIL DISTURBANCE	
PROJECT DEMARCATION FENCE (PDF)	

649.515 - GEOTEXTILE FOR SILT FENCE, WOVEN WIRE REINFORCED

STA. 78+95, 50' LT. - STA. 80+62, 45' LT.
 STA. 80+60, 35' LT. - STA. 80+90, 36' LT.

653.25 - TEMPORARY STONE CHECK DAM, TYPE I

STA. 78+50.67, RT. - STA. 79+05, RT.
 STA. 80+20, RT. - STA. 80+89.33, RT.

653.35 - VEHICLE TRACKING PAD



STA. 78+50.67, LT.
 STA. 80+89.33, LT.

653.50 - BARRIER FENCE

STA. 78+50.67, LT. - STA. 80+89.33, LT.

653.55 - PROJECT DEMARCATION FENCE

STA. 78+50.67, RT. - STA. 80+89.33, RT.

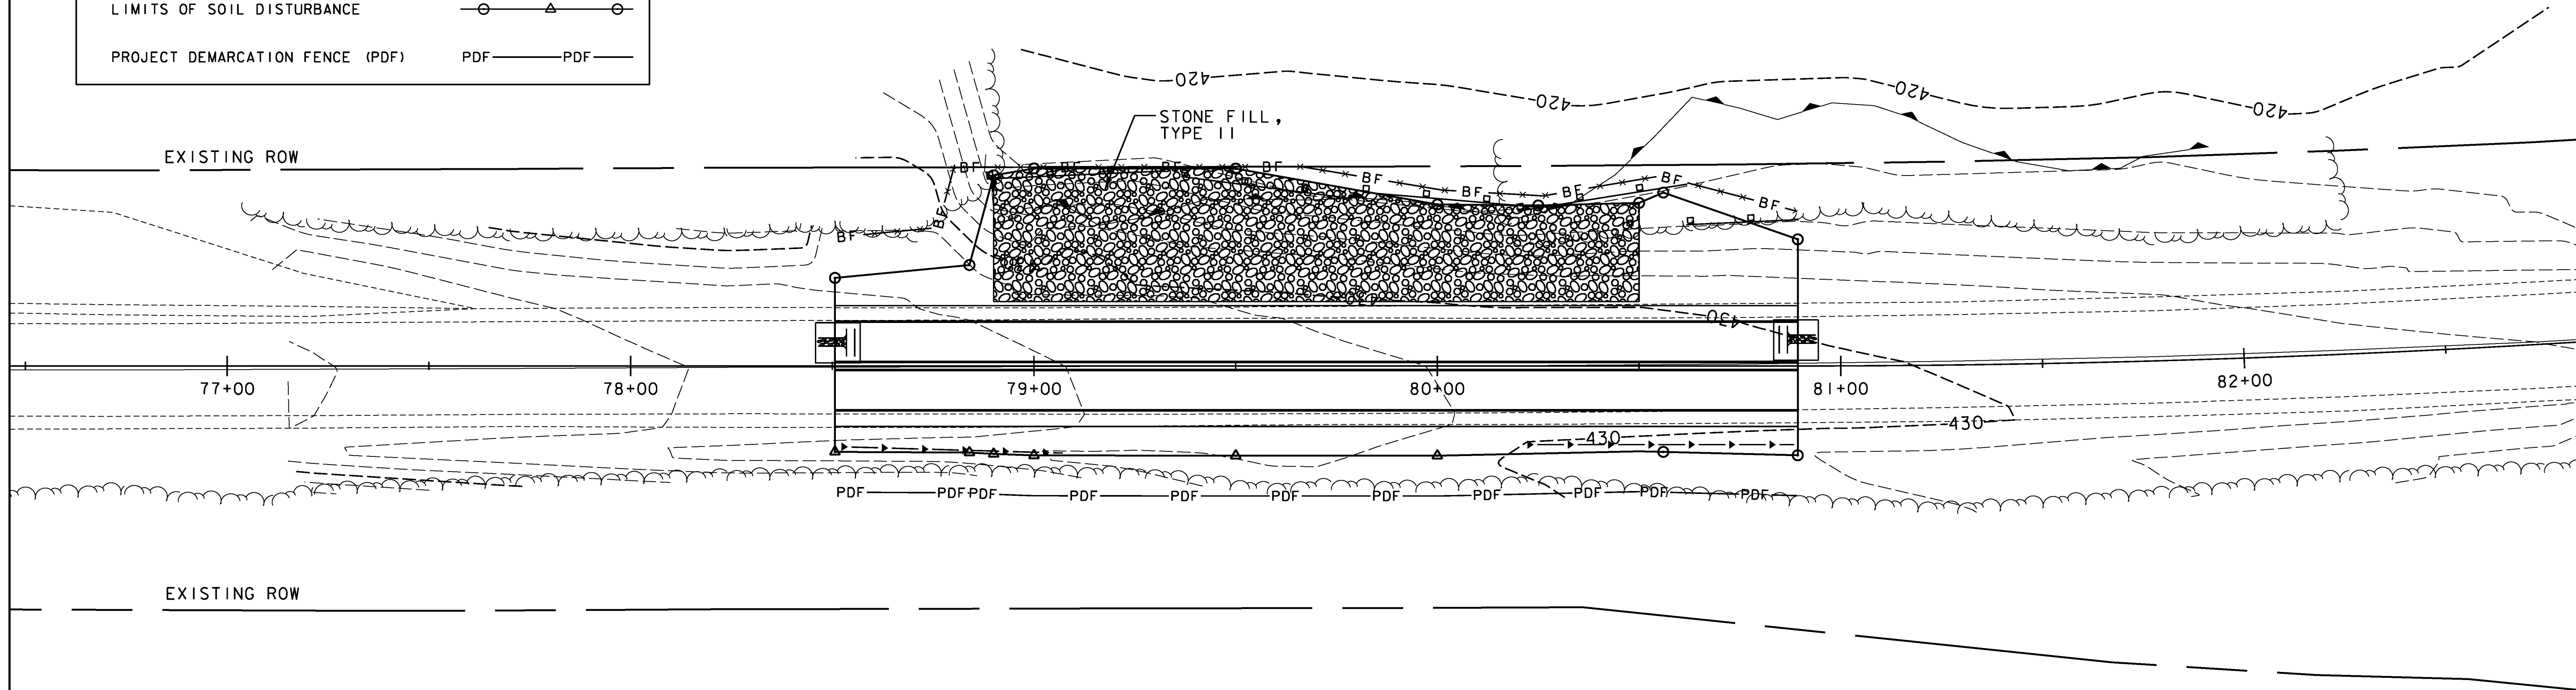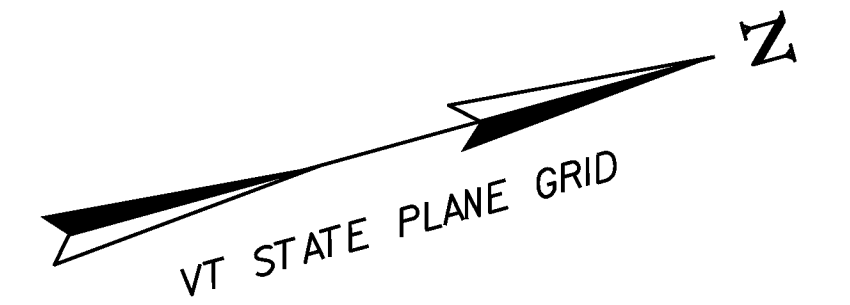

GENERAL CONSTRUCTION SEQUENCE


1. DEMARCATÉ WORK ZONE WITH PROJECT DEMARCATION FENCE AND BARRIER FENCE. FENCE TO BE INSTALLED WITHIN RIGHT OF WAY AND NO MORE THAN 10' BEYOND CONSTRUCTION LIMITS UNLESS APPROVED BY THE RESIDENT ENGINEER.
2. CLEAR AND GRUB THE SITE. DO NOT REMOVE STUMPS, EXCESS SOILS, AND OTHER WASTE MATERIALS UNTIL TEMPORARY E.P.S.C. MEASURES HAVE BEEN INSTALLED.
3. INSTALL TEMPORARY EROSION PREVENTION AND SEDIMENT CONTROL MEASURES, AS SHOWN, AS REQUIRED, OR AS DIRECTED BY THE ONSITE COORDINATOR, IN THE FOLLOWING ORDER:
 - A. STABILIZED CONSTRUCTION ENTRANCE (SCE) - VEHICLES ARE REQUIRED TO DRIVE OVER THE 50' SCE BEFORE EXITING THE CONSTRUCTION LIMITS ONTO ROUTE 108.
 - B. STONE CHECK DAMS (SEE EPSC DETAILS 2 FOR CONSTRUCTION NOTES AND DETAILS).
 - C. SILT FENCE AND EROSION MATTING (SEE EPSC DETAILS 1 FOR CONSTRUCTION NOTES AND DETAILS).
4. DISPOSE OF STUMPS, EXCESS SOILS AND OTHER WASTE MATERIAL IN A LOCATION APPROVED BY THE ONSITE COORDINATOR, THE AGENCY OF NATURAL RESOURCES, THE VTRANS BIOLOGIST AND THE VTRANS ARCHEOLOGIST.

5. COMPLETE CONSTRUCTION OF VT ROUTE 108 REPAIRS.

- A. AS CONSTRUCTION PROGRESSES IMPLEMENT ADDITIONAL TEMPORARY EROSION CONTROLS AS SHOWN, AS REQUIRED, OR AS DIRECTED BY THE ONSITE COORDINATOR. THESE ADDITIONAL TEMPORARY MEASURES SHALL BE PAID FOR UNDER THE APPROPRIATE ITEMS USED ON THIS PROJECT.
 - B. INSPECT AND MAINTAIN EROSION PREVENTION AND SEDIMENT CONTROL MEASURES IN ACCORDANCE WITH THE SPECIFICATIONS AND SPECIAL PROVISIONS.
 - C. DISPOSE OF COLLECTED SEDIMENT AND OTHER POLLUTANTS IN A MANNER APPROVED BY THE ENGINEER THAT WILL NOT RESULT IN SEDIMENTS AND POLLUTANTS ENTERING WATERS OF THE STATE.
6. PERMANENTLY STABILIZE ALL FINISHED GRADES AS EARTHWORK IS COMPLETED INCLUDING CHANNEL LININGS, SEEDING AND MULCHING (PERMANENT TURF ESTABLISHMENT).

EPSC GENERAL NOTES:

1. THESE PLANS SHOW A CONCEPTUAL EROSION CONTROL PLAN, THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER AND ON SITE COORDINATOR.
4. REFER TO EPSC DETAILS AND EPSC NARRATIVE FOR ADDITIONAL REQUIREMENTS.

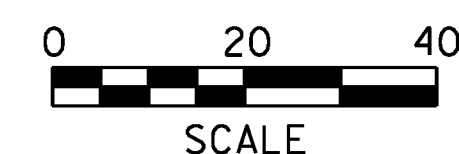

**EPSC
CONSTRUCTION
SITE
PLAN 1**

PROJECT NAME: FLETCHER	FILE NAME: ...\\plotfiles\zlib064bdr_er06.dgn	PLOT DATE: 11/15/2012
PROJECT NUMBER: STP 027-1(22)	PROJECT LEADER: GAE	DRAWN BY: STANTEC
DESIGNED BY: ISM	CHECKED BY: MCF	
EPSC CONSTRUCTION SITE PLAN 1		SHEET 366 OF 387