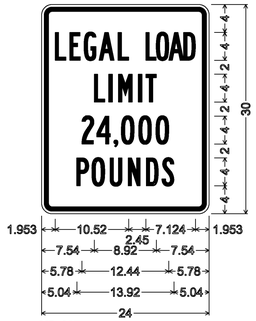

VR-017;
1.500" Radius, 0.625" Border, 0.375" Indent, Black on White;
"LEGAL" B 2K " LOAD" Highway B;
"LIMIT" B 2K;
"24,000" B 2K;
"POUNDS" B 2K;

COLORS
LEGEND - RED (REFL.)
BACKGROUND - WHITE (REFL.)

VR – 020

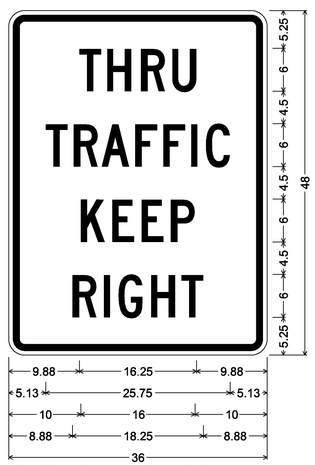

VR-118R THRU TRAFFIC KEEP R/L;
2.25" Radius, 0.88" Border, 0.63" Indent, Black on White;
[THRU] C 2K; [TRAFFIC] C 2K;
[KEEP] C 2K; [RIGHT] C 2K;

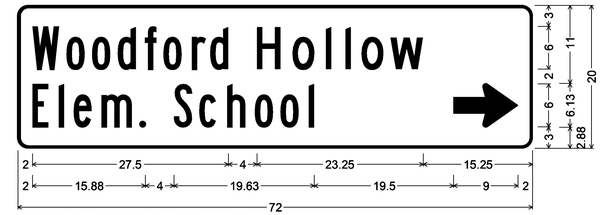

1.50" Radius, 0.38" Border, White on Green;
[Woodford] B [Hollow] C; [Elem. School] B; Standard Arrow Custom 9.00" X 6.13" 0°;

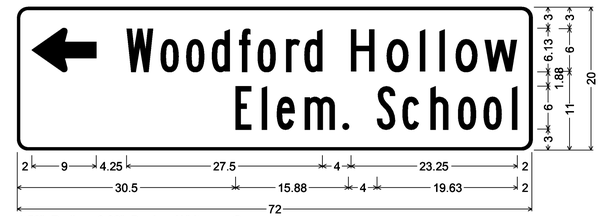

1.50" Radius, 0.38" Border, White on Green;
Standard Arrow Custom 9.00" X 6.13" 180°; [Woodford] B [Hollow] C;
[Elem. School] B;

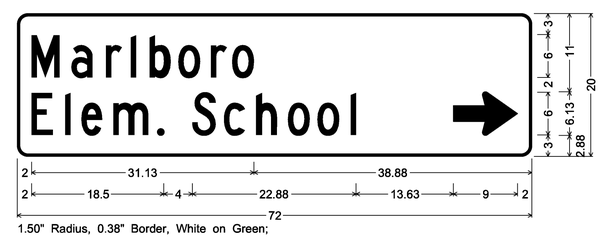

1.50" Radius, 0.38" Border, White on Green;
[Marlboro] C; [Elem. School] C; Standard Arrow Custom 9.00" X 6.13" 0°;

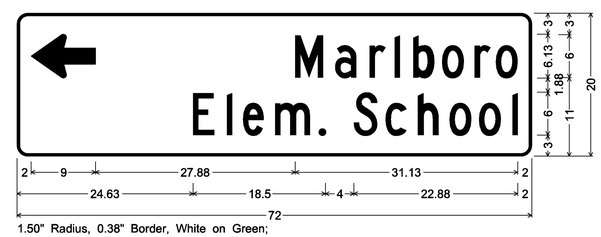

1.50" Radius, 0.38" Border, White on Green;
Standard Arrow Custom 9.00" X 6.13" 180°; [Marlboro] C; [Elem. School] C;

VD1–1 SIGN DETAILS

1.500" Radius, 0.375" Border, White on Green;
[Bennington] C; [14] C;

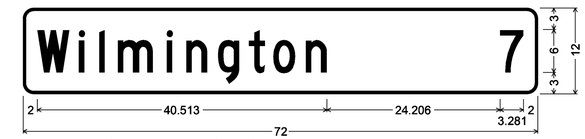

1.500" Radius, 0.375" Border, White on Green;
[Wilmington] C; [7] C 90% spacing;

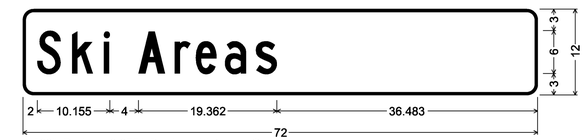

1.500" Radius, 0.375" Border, White on Green;
[Ski Areas] C;

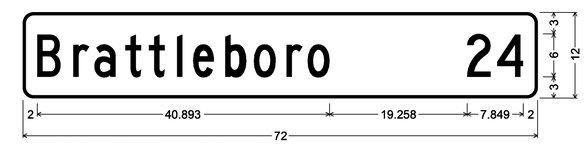

1.500" Radius, 0.375" Border, White on Green;
[Brattleboro] C; [24] C 90% spacing;

VD2–1 SIGN DETAILS

ALL DIMENSIONS SHOWN IN INCHES UNLESS OTHERWISE NOTED.

NOT TO SCALE

PROJECT NAME: WOODFORD - MARLBORO	
PROJECT NUMBER: STPG SIGN (35)	
FILE NAME: 10B336_TS.DGN	PLOT DATE: 10-APR-2012
PROJECT LEADER: A. GAMBLE	DRAWN BY: J. KELLY
DESIGNED BY: J. KELLY	CHECKED BY: A. GAMBLE
SIGN DETAILS 3	SHEET 7 OF 80