


# CONSTRUCTION OPERATIONS TRAFFIC PROTECTION PLAN

BEGIN STA.	END STA.	OFFSET	LENGTH (LF)	RETAIN/REPLACE (Y/N)	APPROX. OFFSET DISTANCE FROM PROPOSED CENTERLINE TO FACE OF EXISTING RAIL (LF)	EXISTING RAIL TYPE (POST AND BARRIER)	ASSESSED CONDITION (GOOD/FAIR/POOR)	CONSTRUCTION CONDITION	900.640 BARRIER FOR TEMPORARY TRAFFIC PROTECTION (LF)
<b>RANDOLPH VT 66</b>									
34+54	38+28	LT	374	PARTIAL REPLACEMENT	24	W BEAM	FAIR	LEAVE IN PLACE FOR ALL OPERATIONS AND REMOVE AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
38+26	51+14	RT	1288	Y	23	W BEAM	FAIR	LEAVE IN PLACE FOR ALL OPERATIONS AND REMOVE AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
54+28	68+26	RT	1398	Y	23	W BEAM	FAIR	LEAVE IN PLACE FOR ALL OPERATIONS AND REMOVE AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
68+57	70+44	RT	187	PARTIAL REPLACEMENT	22	W BEAM	FAIR	LEAVE IN PLACE FOR ALL OPERATIONS AND REMOVE AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
72+41	93+96	RT	2155	Y	22/23	W BEAM	FAIR	LEAVE IN PLACE FOR ALL OPERATIONS AND REMOVE AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
84+31	87+80	LT	349	N	22	W BEAM	FAIR	REMOVE BEFORE SHOULDER RECONSTRUCTION.	-
95+08	98+80	LT	372	Y	22/23	W BEAM	FAIR	LEAVE IN PLACE FOR ALL OPERATIONS AND REMOVE AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
137+34.0	138+62.0	LT	225	N	24	W BEAM	FAIR	REMOVE BEFORE COLD PLANING.	-
141+68.0	142+81.0	RT	113	Y	16	W BEAM	FAIR	REMOVE BEFORE SHOULDER RECONSTRUCTION AND DELINEATE WITH BARRELS AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
148+60.0	150+07.0	RT	147	Y	18	W BEAM	POOR	REMOVE BEFORE SHOULDER RECONSTRUCTION AND DELINEATE WITH BARRELS AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
149+52.0	152+23.0	LT	271	Y	14	W BEAM	POOR	REMOVE BEFORE SHOULDER RECONSTRUCTION AND DELINEATE WITH BARRELS AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IIS LEVELING COURSE IS COMPLETE.	-
345+68.0	347+13.0	LT	145	Y	11	W BEAM	FAIR	REMOVE AND RESET TO FACE OF RAIL 17 FEET OFF PROPOSED CENTERLINE BEFORE SHOULDER RECONSTRUCTION AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IVS IS COMPLETE.	145
346+13.0	346+85.0	RT	72	Y	16	W BEAM	FAIR	REMOVE AND RESET TO FACE OF RAIL 17 FEET OFF PROPOSED CENTERLINE BEFORE SHOULDER RECONSTRUCTION AND INSTALL NEW AFTER COLD MIX LIFT OR TYPE IVS IS COMPLETE.	72
<b>TOTAL =</b>									<b>217</b>

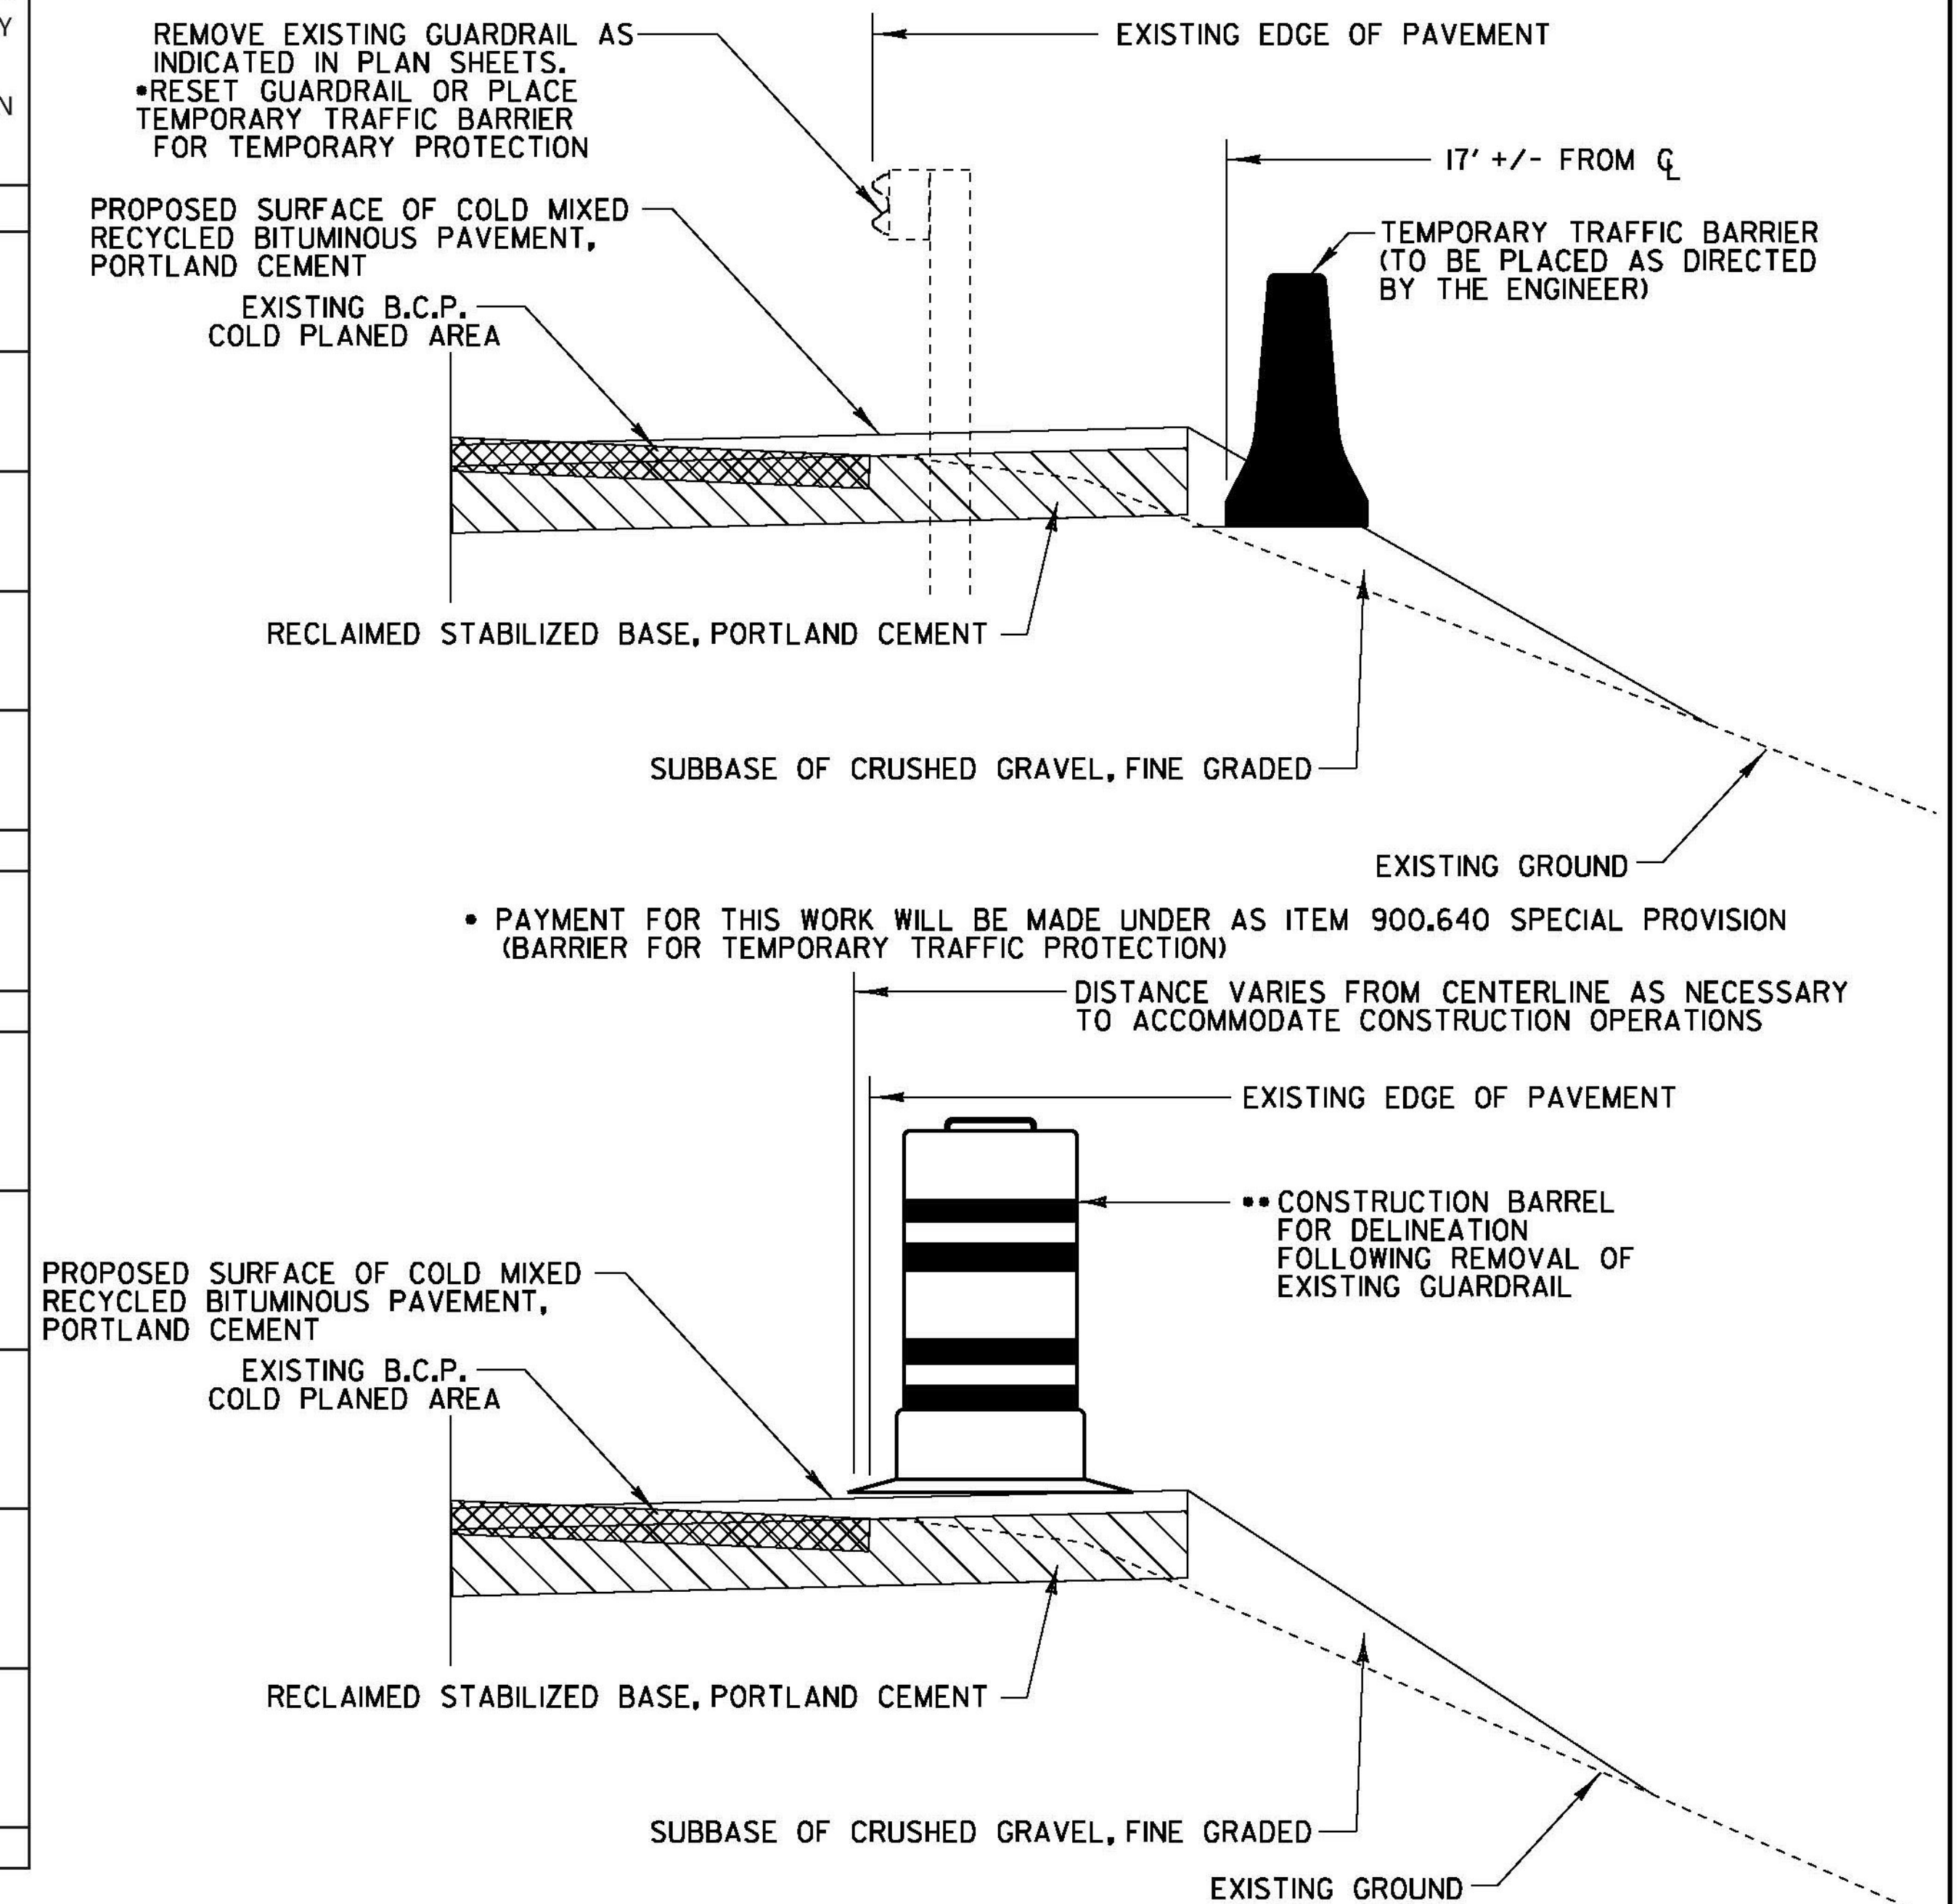

•• PAYMENT FOR THIS WORK WILL BE INCLUDED IN THE UNIT PRICE BID FOR CONTRACT ITEM 64I.I0

PROJECT NAME:	RANDOLPH
PROJECT NUMBER:	STP 2932(I)
FILE NAME:	z10c270.dgn
PROJECT LEADER:	M. FOWLER
DESIGNED BY:	M. FOWLER
CONST. OP. TRAFFIC PROTECTION PLAN SHEET	25B OF 276
PLOT DATE:	6/5/2014
DRAWN BY:	B. KIPP
CHECKED BY:	M. FOWLER