


PROPOSED CONSTRUCTION ACTIVITIES ASSOCIATED WITH CONSTRUCTION SEQUENCING, PHASE 5

1. PRIOR TO THE COMMENCEMENT OF ANY WORK OR THE PLACEMENT OF EQUIPMENT ON THE ROADWAY THE CONTRACTOR SHALL PROVIDE ADVANCED WARNING SIGNS IN ACCORDANCE WITH THE CONSTRUCTION APPROACH SIGNING PLAN AND THE LATEST VERSION OF THE M.U.T.C.D. AND ITS REVISIONS.
2. INSTALL AND MAINTAIN ANY ADDITIONAL EROSION CONTROL MEASURES IN ACCORDANCE WITH THE EPSC PLANS AND DETAILS AND THE VERMONT D.E.C.'S "LOW RISK SITE HANDBOOK FOR EROSION PREVENTION AND SEDIMENT CONTROL."
3. INSTALL ALL WARNING SIGNAGE, REFLECTORIZED DRUMS, TRAFFIC BARRIER, AND ANY OTHER TRAFFIC CONTROL DEVICES PER ACCEPTED TRAFFIC CONTROL PLAN OR AS DIRECTED BY THE ENGINEER.
4. REINSTALL THE ROUTE 100 SPLITTER ISLAND, INCLUDING ALL CURB.
5. REMOVE ALL ROADWAY WIDENING MATERIAL ON THE NORTHEAST AND NORTHWEST QUADRANTS. REINSTALL ALL ROADWAY CURBING ON THE NORTHEAST AND NORTHWEST QUADRANTS. REINSTALL STREET LIGHTS.
6. REGRADE DITCHES AND REESTABLISH SIDE SLOPES TO THEIR PRECONSTRUCTION CONDITIONS. SHIFT ALL TRAFFIC TO THEIR APPROPRIATE PRECONSTRUCTION ALIGNMENTS.

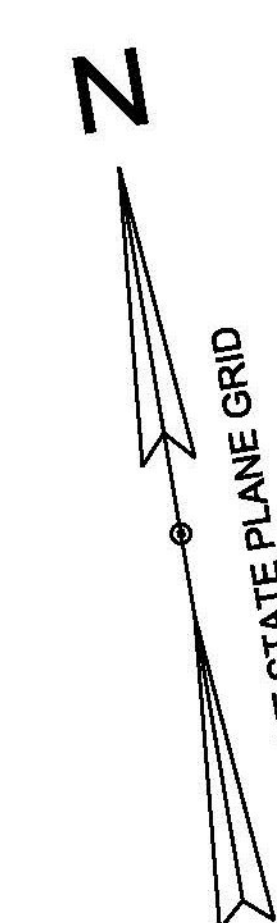

VT ROUTE 100 STA. 41+50.53  
END PROJECT  
HES 030-2(34)


CENTER OF ROUNDABOUT  
VT ROUTE 15 STA. 96+37.69 =  
VT ROUTE 100 STA. 40+00.00 (MM 0.00) =  
TH 5 STA. 63+59.48


VT ROUTE 15 STA. 94+80.66  
BEGIN PROJECT  
HES 030-2(34)

VT ROUTE 15 STA. 97+80.66  
END PROJECT  
HES 030-2(34)

T.H. 5 STA. 62+00.00  
BEGIN PROJECT  
HES 030-2(34)

**LEGEND**

 = WORK AREA

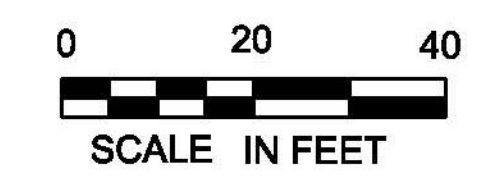

PROJECT NAME: HYDE PARK	PLOT DATE: 11/12/2015
PROJECT NUMBER: HES 030-2(34)	DRAWN BY: M. BOGACZYK
FILE NAME: t14b104+cp.dgn	CHECKED BY: M. LaCROIX
PROJECT LEADER: P. COBURN	
DESIGNED BY: M. BOGACZYK	
CONSTRUCTION SEQUENCING PLAN SHEET 5	SHEET 26 OF 26

