BILL OF MATERIAL

Drawing Number	Revision Number	Ship Mark	Piece Mark	Qty	Type of Material	Size of Material	Grade	Length	Finish	Notes
126		126D		28			Total weight:		3321 kg	
126		126D	ma126	28	C Channels	380x50	M270M-GR345	2372		6

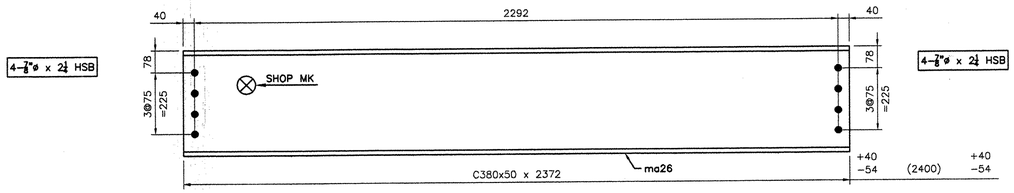

28 - DIAPHRAGMS - 126D

BOLTS LIST

QTY	DESCRIPTION	LENGTH
	FIELD BOLTS LIST	
224	7/8"ø HSB	2 1/4

NOTES:

1- GENERAL NOTES: SEE GN101
2- HOLES: 15/16ø (24ø) (UN)
3- ALL HS BOLTS SHALL BE A325 TYPE 1 GALVANIZED C/W 1 NUT & 1 WASHER (UN)
4- ALL STEEL SHALL BE GALVANIZED, SEE GN101
5- ALL SHOP BOLTS SHALL BE HAND TIGHTEN
6- ALL HOLES SHALL BE "CNC" DRILLED (UN)
7- WIRE-BRUSH PREPARATION 3" OF OPEN HOLES FOR FAYING SURFACES PRIOR TO BOLTING

RESERVED FOR STAMPS

REV	DATE	DESCRIPTION
△	-	-

QTY	DATE	ISSUED TO	FOR
8 -	4/8/05	F.W. Whitcomb Construction	Approval

NOTICE
This drawing shall not be used or reproduced in any manner, nor shall any similar drawings or structures be made therefrom, nor shall the information thereon be used for any purpose other than that for which it is released without the written consent of an officer of EASTERN BRIDGE LLC.

EASTERN BRIDGE LLC
RURAL RTE 2, BOX 302
CLAREMONT, NH 03743
603-542-5202

PROJECT: ROUTE 100 OVER THE WEST RIVER			
LOCATION: TOWN OF JAMAICA			
ENGINEER: CLD CONSULTING ENGINEERS			
CUSTOMER: VERMONT A. O. T.			
DRAWING TITLE: DIAPHRAGMS			
DRAWN BY: YT	02/15/05	JOB NUMBER: 5075	SHEET NUMBER: 126
CHECKED BY: GG	03/24/05		

16555