
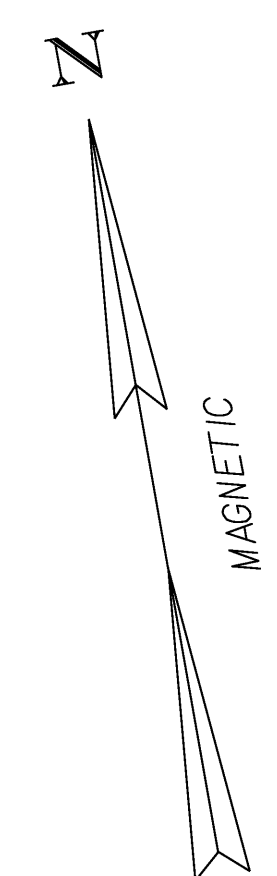



NOTES

1. AN ALTERNATE TEMPORARY EROSION CONTROL PLAN MAY BE SUBMITTED BY THE CONTRACTOR FOR APPROVAL BY THE RESIDENT ENGINEER.
2. THE CONTRACTOR WILL USE OTHER TEMPORARY OR PERMANENT EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION AND AS DIRECTED BY THE RESIDENT ENGINEER. SEE SECTION 105.23 OF THE VERMONT AOT STANDARD SPECIFICATIONS FOR CONSTRUCTION DATED 2006.
3. USE THE EROSION CONTROL PLAN SHEET IN CONJUNCTION WITH THE ESPC DETAIL SHEETS.
4. THE CONTRACTOR WILL PROPOSE LOCATIONS FOR SEDIMENTATION OF WATER PUMPED FROM THE COFFERDAMS. SPECIAL CONSIDERATION MUST BE GIVEN TO THE FIRST PUMP-DOWN OF THE COFFERDAMS. THIS WILL CONTAIN THE GREATEST VOLUME OF WATER WITH A HIGH SEDIMENT LOAD. THE CONTRACTOR MAY PROVIDE ADDITIONAL SEDIMENT TRAPS WITHIN THE CONSTRUCTION LIMITS IF REQUIRED OR CONTROL THE RATE OF DRAW-DOWN. ALL SEDIMENT TRAP LOCATIONS MUST BE APPROVED BY THE RESIDENT ENGINEER.
5. AFTER COMPLETION OF THE SUBSTRUCTURE, THE SEDIMENT IN THE TRAP SHALL BE REMOVED AND THE GROUND RESTORED TO ITS ORIGINAL SLOPES OR GRADED AS SHOWN ON THE CONSTRUCTION DRAWINGS.

LEGEND	
	GEOTEXTILE FOR SILT FENCE
	STONE FILL, TYPE II
	TEMPORARY STONE CHECK DAMS TYPE I
	INLET PROTECTION TYPE I
	REMOVE PAVEMENT, SEED AND MULCH SEE SHEET 48 FOR NOTES

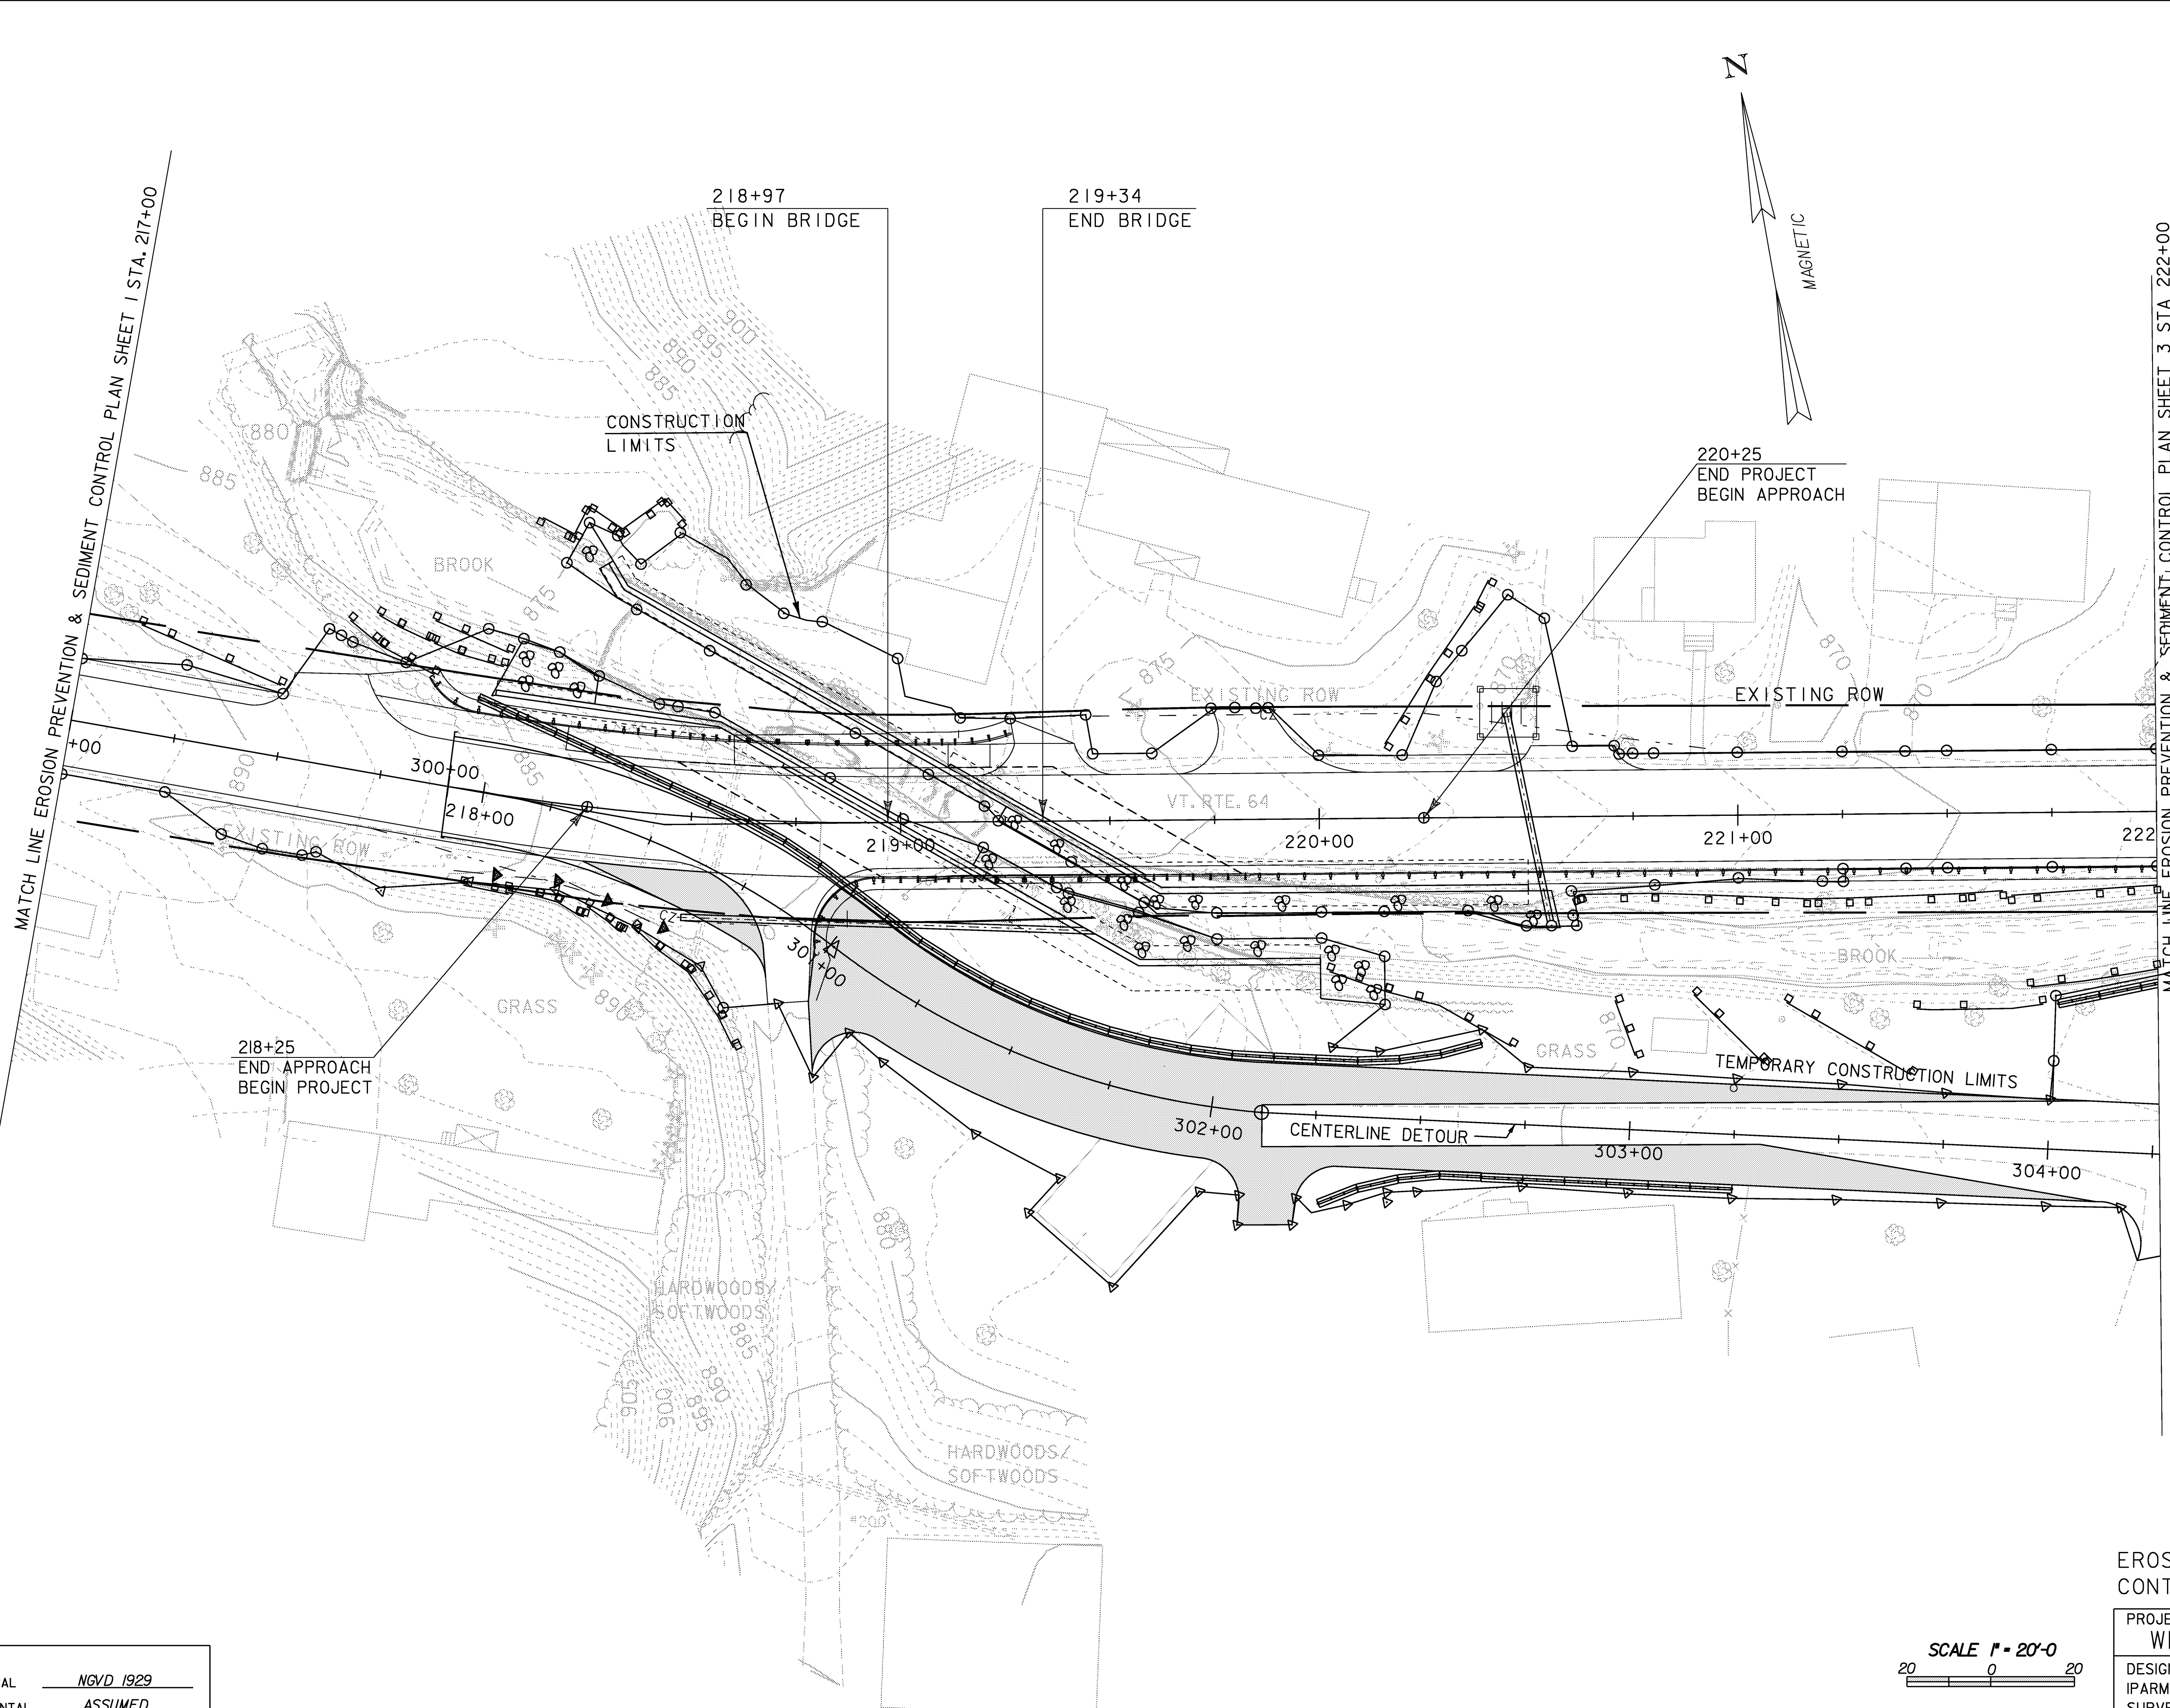

EROSION PREVENTION & SEDIMENT CONTROL PLAN SHEET 2



PROJECT: WILLIAMSTOWN	PROJECT NO.: BRS 0204(4)
DESIGN FILE NAME: /str2/83ell/dellero.dgn	PLOT DATE: 07-APR-2008
IPARM FILE NAME: sellero2	SURVEY DATE: 9/89
SURVEYED BY: GILMAN	DRAWN BY: U. STANLEY
SQUAD LEADER: M. EVANS-MONGEON	SHEET: 31 OF 108

DATUM	
VERTICAL	NGVD 1929
HORIZONTAL	ASSUMED