TRAFFIC ITEM AND TRAFFIC SIGN SUMMARY SHEET, NOTES AND DETAILS

MILEMARKER, STATION, OR SIGN NUMBER	SIGN LEGEND	SIGN DIMENSIONS	EXISTING SIGNS TO BE SALVAGED: REMOVE (EA.)	REMOVE (X)	RETAIN (X)	NEW AND SALVAGED SIGNS: NEW "A" (S.F.)	NEW "B" (S.F.)	SALV. SIGN (EA.)	SALV. T.I.S. (S.F.)	EXISTING POSTS: RET.	DRILL	REM.	SALV.	NEW SIGN POSTS: NUMBER OF POSTS	FLANGED CHANNEL: 2.0 LB./FT.	2.5 LB./FT.	3.0 LB./FT.	TUBULAR ALUMINUM: 3.0" Ø	3.0" □	4.0" Ø	4.0" Ø MOD.	W SHAPED STEEL: POST SIZE	WEIGHT	FTG. SIZE 24"	FTG. SIZE 30"	REMARKS	FOR SIGN DETAIL SHEET: PLAN SHEET NUMBER	STD. SHEET NUMBER
0.95 RT.	SPEED LIMIT 35		X	X				1				X		1	X													
0.99 LT.	MIDDLE LANE ENDS		X									X																
" "			X	X				1						1			X											
1.06 RT.	SPEED LIMIT 35		X	X				1				X		1			X											
" "	NO PARKING		X	X				1																				
1.45 LT.	NO PARKING		X	X				1				X		1	X													
1.56 LT.	NO PARKING FROM 1.58 LT.							1						1	X													
1.58 LT.	SOUTH	2' x 1'	X			2								1	X												E-12	
	7	2' x 2'	X			4																					E-12	
" "	NO PARKING		X	X																							REINSTALL AT 1.56 LT.		
SUB-TOTALS			15			22		11	15							all flan. char. 407		30.4											

TRAFFIC ITEM SUMMARY

ITEM NO.	ITEM	NEW HAVEN		SO. BURLINGTON		UNIT	RND.	TOTAL
675.20	TRAFFIC SIGNS, TYPE A	55.6		22		S.F.	0.4	78
675.30	FLANGED CHANNEL SIGN POSTS	300		407		LB		707
675.32	TUBULAR ALUMINUM SIGN POST			30.4		LB	0.6	31
675.50	REMOVING SIGNS	10		15		EA		25
675.60	ERECTING SALVAGED SIGNS	4		11		EA		15
680.20	TRAVEL INFORMATION SIGN			15		S.F.		15

SEE SHEET TD 504 FOR PROJECT SUMMARY OF QUANTITIES AND REVISION NOTE FOR LEGAL LOAD LIMIT SIGNING

NOTES AND DETAILS

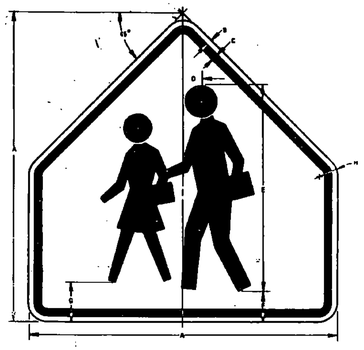

S1-1

DIMENSIONS (INCHES)								
	A	B	C	D	E	F	G	H
STD. & REG.	36	1/2	3/4	2	25	3	3-3/4	1-7/8
EXTRA.	30	5/8	7/8	2-1/2	24	3-1/2	4-1/2	2-1/4
SPECIAL	48	3/4	1-1/4	3-1/4	32	5	6	3

COLORS

TRAFFIC SHEET NO. TD 532

DRAWN BY _____ DATE _____

CHKED BY _____ DATE _____

NEW HAVEN, SOUTH BURLINGTON

PROJ. NO. STATEWIDE F-SFTY (85) S

SHEET 78 OF 200

BRUNING 53428.3