TRAFFIC SIGN SUMMARY SHEET

1986

MILEMARKER, STATION, OR SIGN NUMBER	SIGN LEGEND	SIGN DIMENSIONS	EXISTING SIGNS: TO BE SALV.	EXISTING SIGNS: REMOVE	EXISTING SIGNS: RETAIN	NEW AND SALVAGED SIGNS: "A"	NEW AND SALVAGED SIGNS: "B"	NEW AND SALVAGED SIGNS: SALV. SIGN	NEW AND SALVAGED SIGNS: SALV. T.B.S.	EXISTING POSTS: RET.	EXISTING POSTS: DRILL	EXISTING POSTS: REM.	EXISTING POSTS: SALV.	NEW SIGN POSTS: NUMBER OF POSTS	FLANGED CHANNEL LB./FT.: 2.0	FLANGED CHANNEL LB./FT.: 2.5	FLANGED CHANNEL LB./FT.: 3.0	TUBULAR ALUMINUM: 3.0"ø	TUBULAR ALUMINUM: 3.0"□	TUBULAR ALUMINUM: 4.0" ø	TUBULAR ALUMINUM: 4.0"øM.	TUBULAR STEEL: 3" Ø	TUBULAR STEEL: 3.5" Ø	TUBULAR STEEL: 4.0" Ø	TUBULAR STEEL: 5.0" Ø	W SHAPED STEEL: POST SIZE	W SHAPED STEEL: WEIGHT	FTG. SIZE: 24"	FTG. SIZE: 30"	REMARKS	FOR SIGN DETAIL SHEET: PLAN SHEET NUMBER	FOR SIGN DETAIL SHEET: STD. SHEET NUMBER

FINAL POST LENGTHS ARE TO BE DETERMINED IN THE FIELD. POST SIZES ARE COMPUTED BASED ON INFORMATION FURNISHED ON THE STANDARD SHEETS AND THE DESIGN DIVISION'S 'SIGN POST DESIGN MANUAL'. TOTALS				EA.		SF.	SF.	EA.	SF.																							

TRAFFIC ITEM SUMMARY

ITEM NO.	ITEM	UNIT	F0216-1(31)S	F026-2(3)S	(31) RNDG.	(3) RNDG.	TOTAL
646.31	DURABLE 4" YELLOW LINE	LF.	1514	1425	6	5	2950
646.34	DURABLE 8" WHITE LINE	LF.	125	200	5	-	325
646.35	DURABLE 8" YELLOW LINE	LF.	172	210	18	-	400
646.42	DURABLE ARROW MARKING	EA.	2	4	-	-	6
646.44	DURABLE LETTER IN WORD MARKING	EA.	12	21	-	-	33
646.50	TEMP. 4" WHITE LINE	LF.	2359	3121	16	4	5500
646.51	TEMP. 4" YELLOW LINE	LF.	2416	3274	4	6	5700
646.54	TEMP. 8" WHITE LINE	LF.	90	150	10	-	250
675.32	TUBULAR ALUMINUM SIGN POSTS	LB.	-	57	-	3	60
646.62	TEMP. ARROW MARKING	EA.	2	4	-	-	6
646.60	TEMP. 24" STOP BAR	LF	46	-	4	-	50
675.20	TRAFFIC SIGNS, TYPE A	SF.	64.5	184.1	0.5	0.9	250
675.21	TRAFFIC SIGNS, TYPE B	SF.	374	154.	6	6	540
675.30	FLANGED CHANNEL SIGN POSTS	LB.	216.5	742.	3.5	8	970
675.31 (MOD.)	W-SHAPE STEEL SIGN POSTS	LB.		747	-	3	750
675.41	FOUNDATION FOR W-SHAPE STEEL POSTS 24" DIA	EA.		2	-	-	2
675.50	REMOVING SIGNS	EA.	24	38	-	-	62
676.15	REMOVE AND REPLACE REFLECTOR UNITS (MOD)	EA.		37		3	40

NOTES AND DETAILS

THE ITEM REMOVE AND REPLACE REFLECTOR UNITS (MOD.) SHALL BE NEW REFLECTOR UNITS ONLY. THERE ARE NO EXISTING UNITS TO REMOVE.

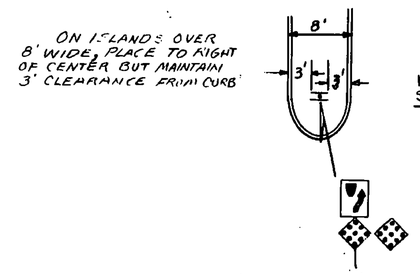

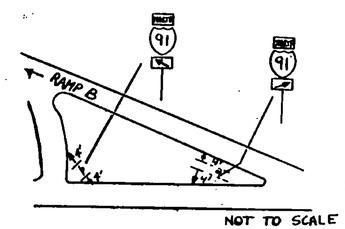

SIGN LOCATION DETAIL

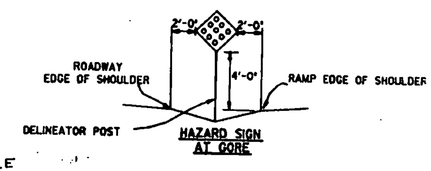

ITEM NO.	ITEM	UNIT	(31)	(3)	(31) RNDG.	(3) RNDG.	TOTAL
646.40	DURABLE 24" STOP BAR	LF	46	-	4	-	50
646.21	PAINTED CURB	LF	330	705	-	-	1035
675.60	ERECTING SALVAGED SIGN	EA.	1		-	-	1
646.30	DURABLE 4" WHITE LINE	LF	506	470	4	-	980
646.80	REMOVAL OF EXISTING PAV'T MARKING	SF	-	40	-	-	40

TRAFFIC SIGN SUMMARY SHEET

PREPARED BY LSW DATE 5/87
CHECKED BY _____ DATE ____
DESIGN SUPERVISOR _____ DATE ____
PROJ. NEWBURY F026-1(31)S F 026-2(3)S
TRAFFIC SHEET NO. 508 OF 510
SHEET 13 OF 43 SHEETS