TRAFFIC SIGN SUMMARY SHEET

1987

MILEMARKER, STATION, OR SIGN NUMBER	SIGN LEGEND	SIGN DIMENSIONS	EXISTING SIGNS: TO BE SALV.	EXISTING SIGNS: REMOVE	EXISTING SIGNS: RETAIN	NEW AND SALVAGED SIGNS: 'A'	NEW AND SALVAGED SIGNS: 'B'	NEW AND SALVAGED SIGNS: SALV. SIGN	NEW AND SALVAGED SIGNS: SALV. T.&S.	EXISTING POSTS: RET.	EXISTING POSTS: DRILL	EXISTING POSTS: REM.	EXISTING POSTS: SALV.	NEW SIGN POSTS: NUMBER OF POSTS	FLANGED CHANNEL LB./FT.: 2.0	FLANGED CHANNEL LB./FT.: 2.5	FLANGED CHANNEL LB./FT.: 3.0	TUBULAR ALUMINUM: 3.0"ø	TUBULAR ALUMINUM: 3.0"□	TUBULAR ALUMINUM: 4.0"ø	TUBULAR ALUMINUM: 4.0"øM.	TUBULAR STEEL: 3" Ø	TUBULAR STEEL: 3.5" Ø	TUBULAR STEEL: 4.0" Ø	TUBULAR STEEL: 5.0" Ø	W SHAPED STEEL: POST SIZE	W SHAPED STEEL: WEIGHT	FTG. SIZE: 24"	FTG. SIZE: 30"	REMARKS	FOR SIGN DETAIL SHEET: PLAN SHEET NUMBER	FOR SIGN DETAIL SHEET: STD. SHEET NUMBER
0.187 LT.	STOP	30" × 30"				6.25								1		X																E-143
0.20 LT.	DEAD END	30" × 30"				6.25								1		X															TS# 506	
FINAL POST LENGTHS ARE TO BE DETERMINED IN THE FIELD. POST SIZES ARE COMPUTED BASED ON INFORMATION FURNISHED ON THE STANDARD SHEETS AND THE DESIGN DIVISION'S 'SIGN POST DESIGN MANUAL'. TOTALS				EA.		SF. 12.5	SF.	EA.	SF.						65	65																

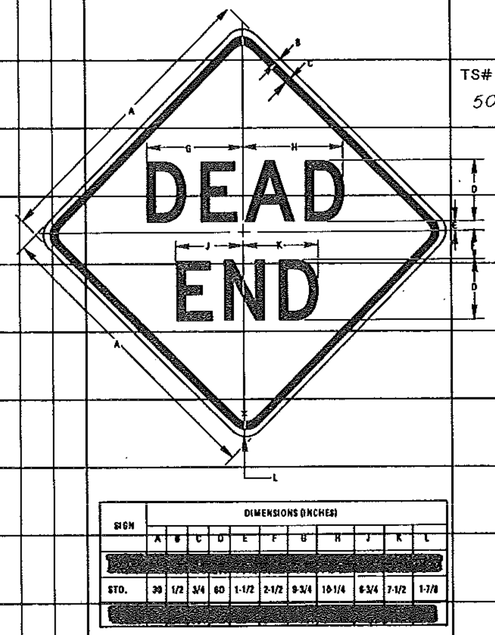

SIGN	DIMENSIONS (INCHES) A	B	C	D	E	F	G	H	J	K	L
STD.	30	1/2	3/4	60	1-1/2	2-1/2	9-3/4	10-1/4	6-3/4	7-1/2	1-7/8

COLORS

LEGEND – BLACK (NON-REFL)
BACKGROUND – YELLOW (REFL)

FOR MATERIALS, REFER TO STD. E-150

TRAFFIC ITEM SUMMARY

ITEM NO.	ITEM	UNIT	QUANTITY	RNDG.	TOTAL
646.21	PAINTED CURB	LF.	320	-0-	320
646.30	DURABLE 4" WHITE LINE	LF.	280	-0-	280
646.31	DURABLE 4" YELLOW LINE	LF.	860	-0-	860
646.35	DURABLE 8" YELLOW LINE	LF.	100	-0-	100
646.42	DURABLE ARROW MARKING	EA.	3	-0-	3
646.44	DURABLE LETTERS IN WORD MARKINGS	EA.	12	-0-	12
646.50	TEMPORARY 4" WHITE LINE	LF.	1910	-0-	1910
646.51	TEMPORARY 4" YELLOW LINE	LF.	1226	-0-	1226
675.20	TRAFFIC SIGNS TYPE A	SF.	169.95	.05	170
675.30	FLANGED CHANNEL SIGN POSTS	LB.	482.5	.5	483
675.32	TUBULAR ALUMINUM SIGN POSTS	LB.	114	-0-	114
675.50	REMOVING SIGNS	EA.	46	-0-	46
676.12	REMOVAL OF EXISTING DELINEATORS	EA.	5	-0-	5

NOTES AND DETAILS

TRAFFIC SIGN SUMMARY SHEET

PREPARED BY D.C.F. DATE 4/87
CHECKED BY D.A.R. DATE 4/87
DESIGN SUPERVISOR DAR DATE 4/87
PROJ. BARTON
A5 0310 (5)
TRAFFIC SHEET NO. 506 OF 507
SHEET 17 OF 18 SHEETS