


ISOMETRIC VIEW

STAGE 17:

A. INSTALL PRIMARY DIAGONAL CABLES BETWEEN UPPER SOUTH TRUSS JACKING NODES AND TEMPORARY TRANSVERSE BEAMS. TENSION CABLES TO 5 KIPS EACH.

STAGE 18:

A. INSTALL SECONDARY DIAGONAL CABLES FROM NORTH TRUSS TO TRANSVERSE SUPPORT BEAMS. CABLES SHALL REMAIN SLACK AND ALLOW FOR NORTH TRUSS SIDE LAUNCH.

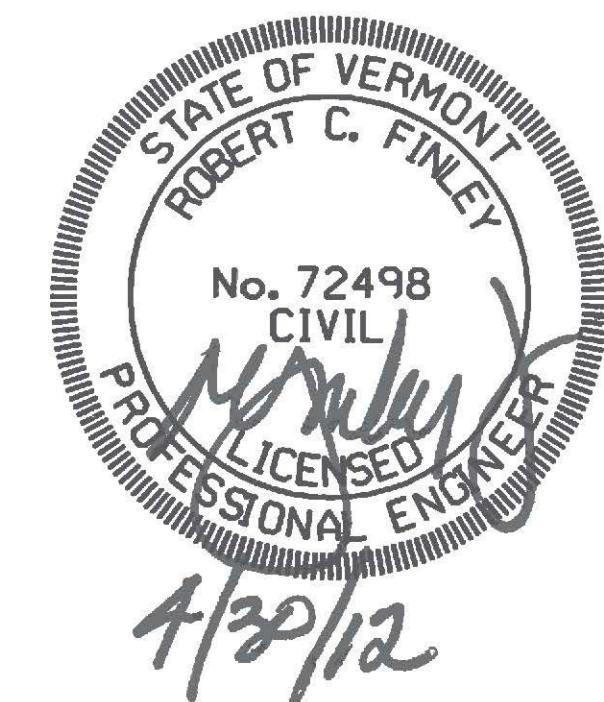

Revision	Drawn By	Date	Description	Revision	Drawn By	Date	Description	Name	Date	Project	Title	Sheet No.	
1	JLB	04/25/12	Removed Mabey Truss.					Drawn By: DAL	01/12	FINLEY Engineering Group, Inc. 1589 Metropolitan Blvd. Tallahassee, FL 32308 850-894-1600 Fax: 850-894-1614	RICHMOND TRUSS WIDENING STATE OF VERMONT AGENCY OF TRANSPORTATION CHITTENDEN COUNTY U.S. ROUTE 2 BRIDGE NO. 24	CONSTRUCTION MANUAL CONSTRUCTION SEQUENCE (10 OF 22)	CM-13
							Designed By: RAA	12/11					
							Approved By: JMP	12/11					