


STAGE 2 - DEMOLITION

1. REMOVE EXISTING TRACK, SOLDIER PILE, AND LAGGING AS NECESSARY.
2. PROCEED WITH EXCAVATION ON THE EAST SIDE OF THE TEMPORARY SOLDIER PILE AND LAGGING WALL, SUPPORT LAGGING AS NECESSARY.
3. INSTALL WALERS AND TIE BACKS AND THEN CONTINUE EXCAVATION TO THE NEXT LEVEL OF WALERS.
4. COMPLETE EXCAVATION TO BOTTOM OF ABUTMENT WINGWALL AND FOOTING TO INCLUDE DEMOLITION OF THE REMAINING PORTION OF THE EXISTING ABUTMENT.

STAGE 2 - CONSTRUCTION

1. CONSTRUCT REMAINING PORTION OF THE ABUTMENT AND WINGWALL.
2. BACKFILL BEHIND ABUTMENT AND WINGWALL REMOVING LAGGING AND WALERS DURING BACKFILLING OPERATION.
3. CUT OFF SOLDIER PILES AT 1M BELOW TOP OF RAIL AND COMPLETE BACKFILL.

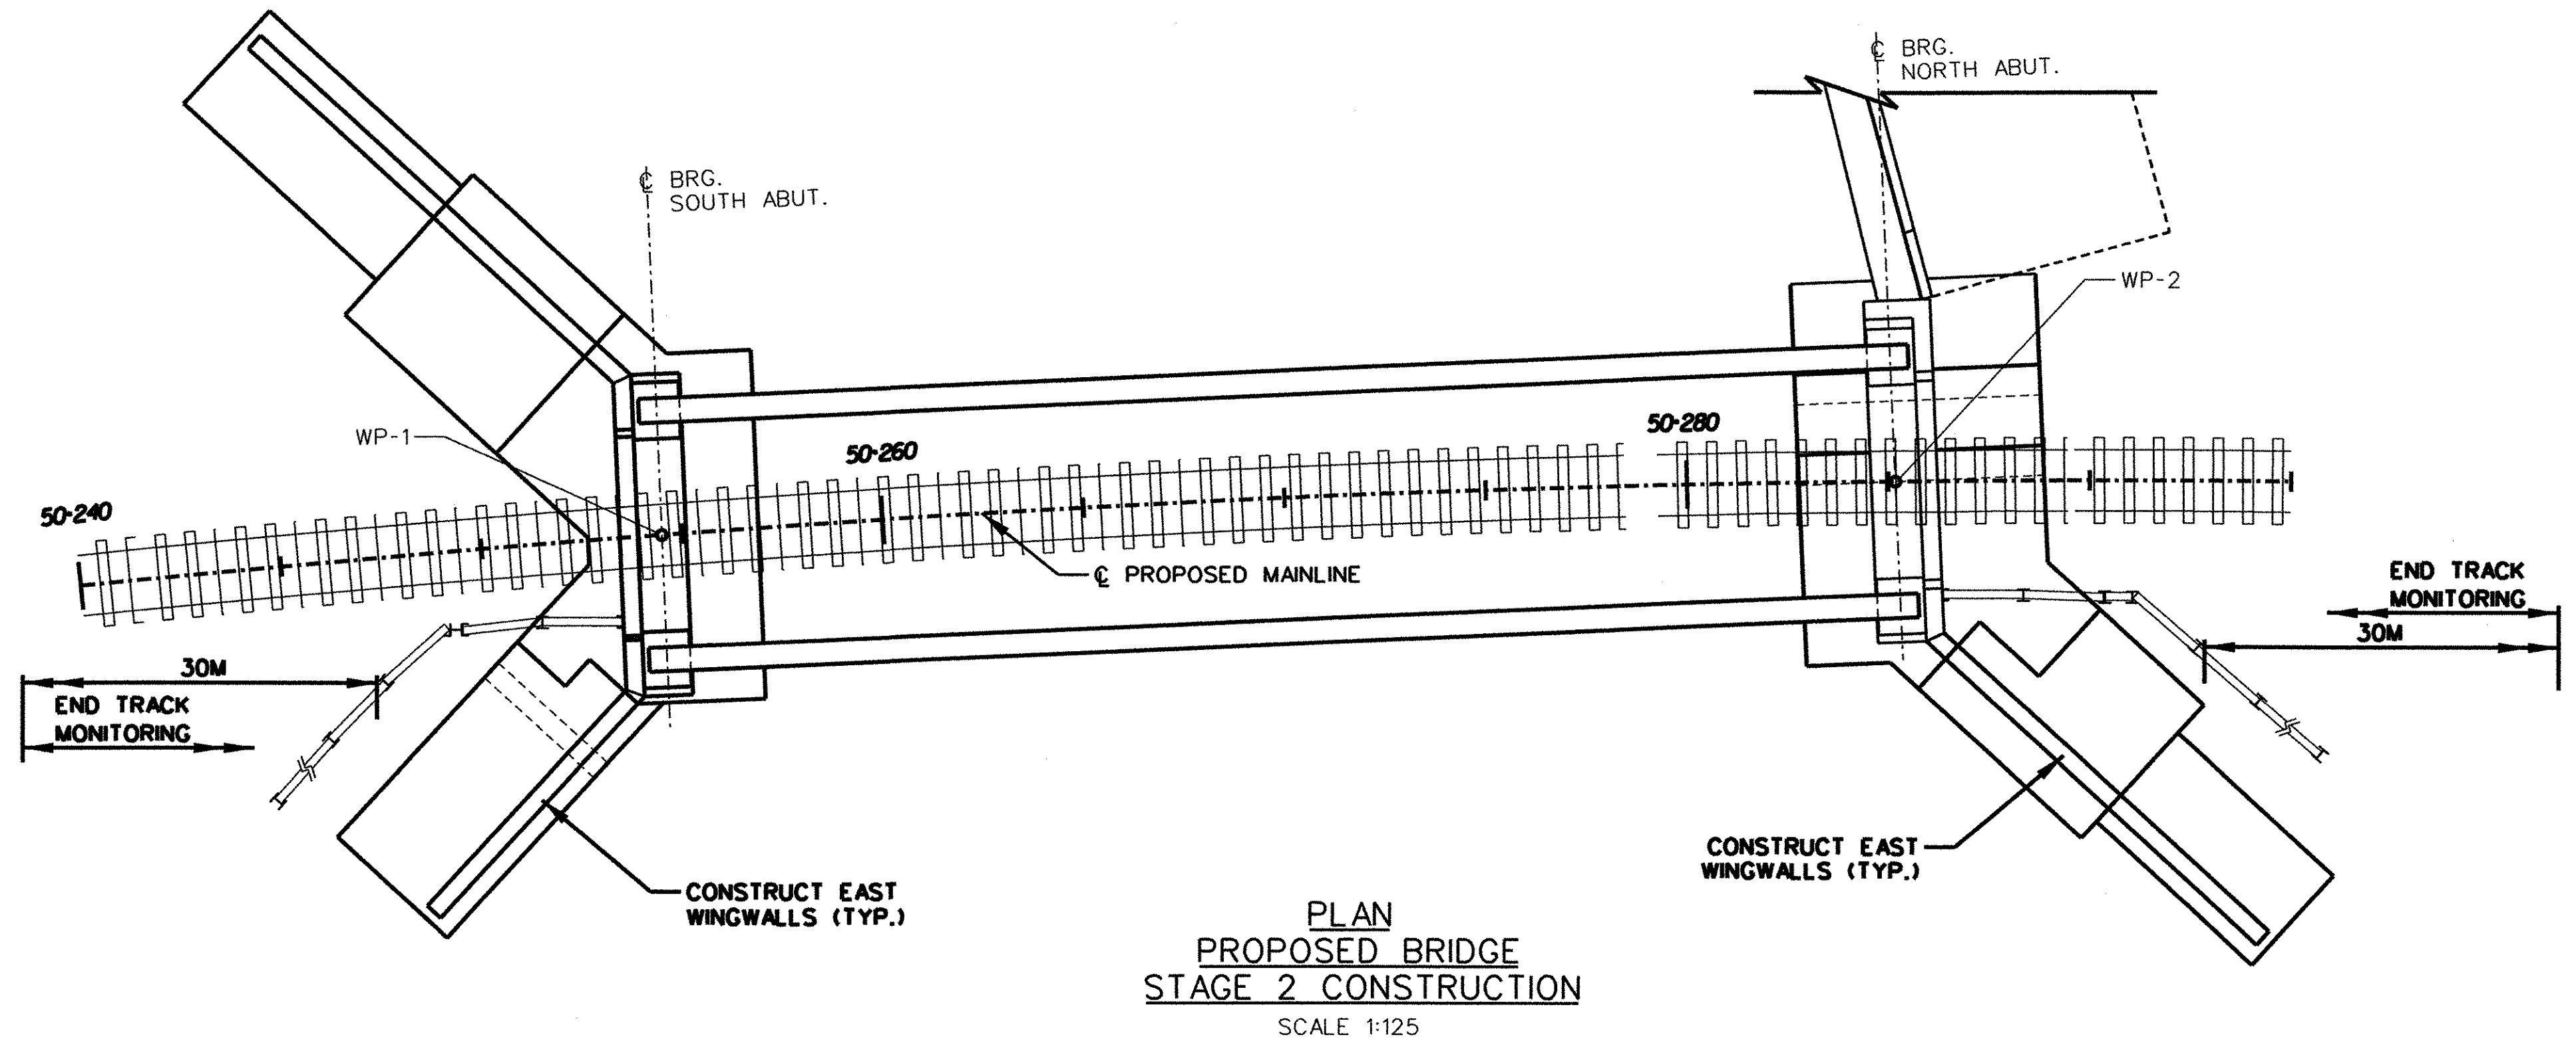

| | | | |
|-----------------|-------------|-------------|------------|
| PROJECT NAME: | BRATTLEBORO | PLOT DATE: | 10-02-2002 |
| PROJECT NUMBER: | NH 010-2(2) | DRAWN BY: | DHL |
| FILE NAME: | rt9br101 | CHECKED BY: | TEM |
| PROJECT LEADER: | JHR | SHEET | 86 OF 145 |
| DESIGNED BY: | GHB | | |