

649.61 GEOTEXTILE FOR FILTER CURTAIN


STA. 14+22.0 - STA. 14+55.0 LT & RT (64 SY)
 STA. 15+42.0 - STA. 15+71.0 LT & RT (99 SY)

653.55 PROJECT DEMARCATION FENCE

STA. 14+02.0 - STA. 14+30.0 RT (34 LF)
 STA. 14+14.0 - STA. 14+47.0 LT (33 LF)
 STA. 15+53.0 - STA. 16+15.0 LT (62 LF)
 STA. 15+59.0 - STA. 16+10.0 RT (53 LF)

649.515 GEOTEXTILE FOR SILT FENCE, WOVEN WIRE REINFORCED


STA. 14+09.0 - STA. 14+21.0 RT (6 SY)
 STA. 14+32.0 - STA. 14+39.0 LT & RT (16 SY)
 STA. 15+61.0 - STA. 15+65.0 LT & RT (30 SY)

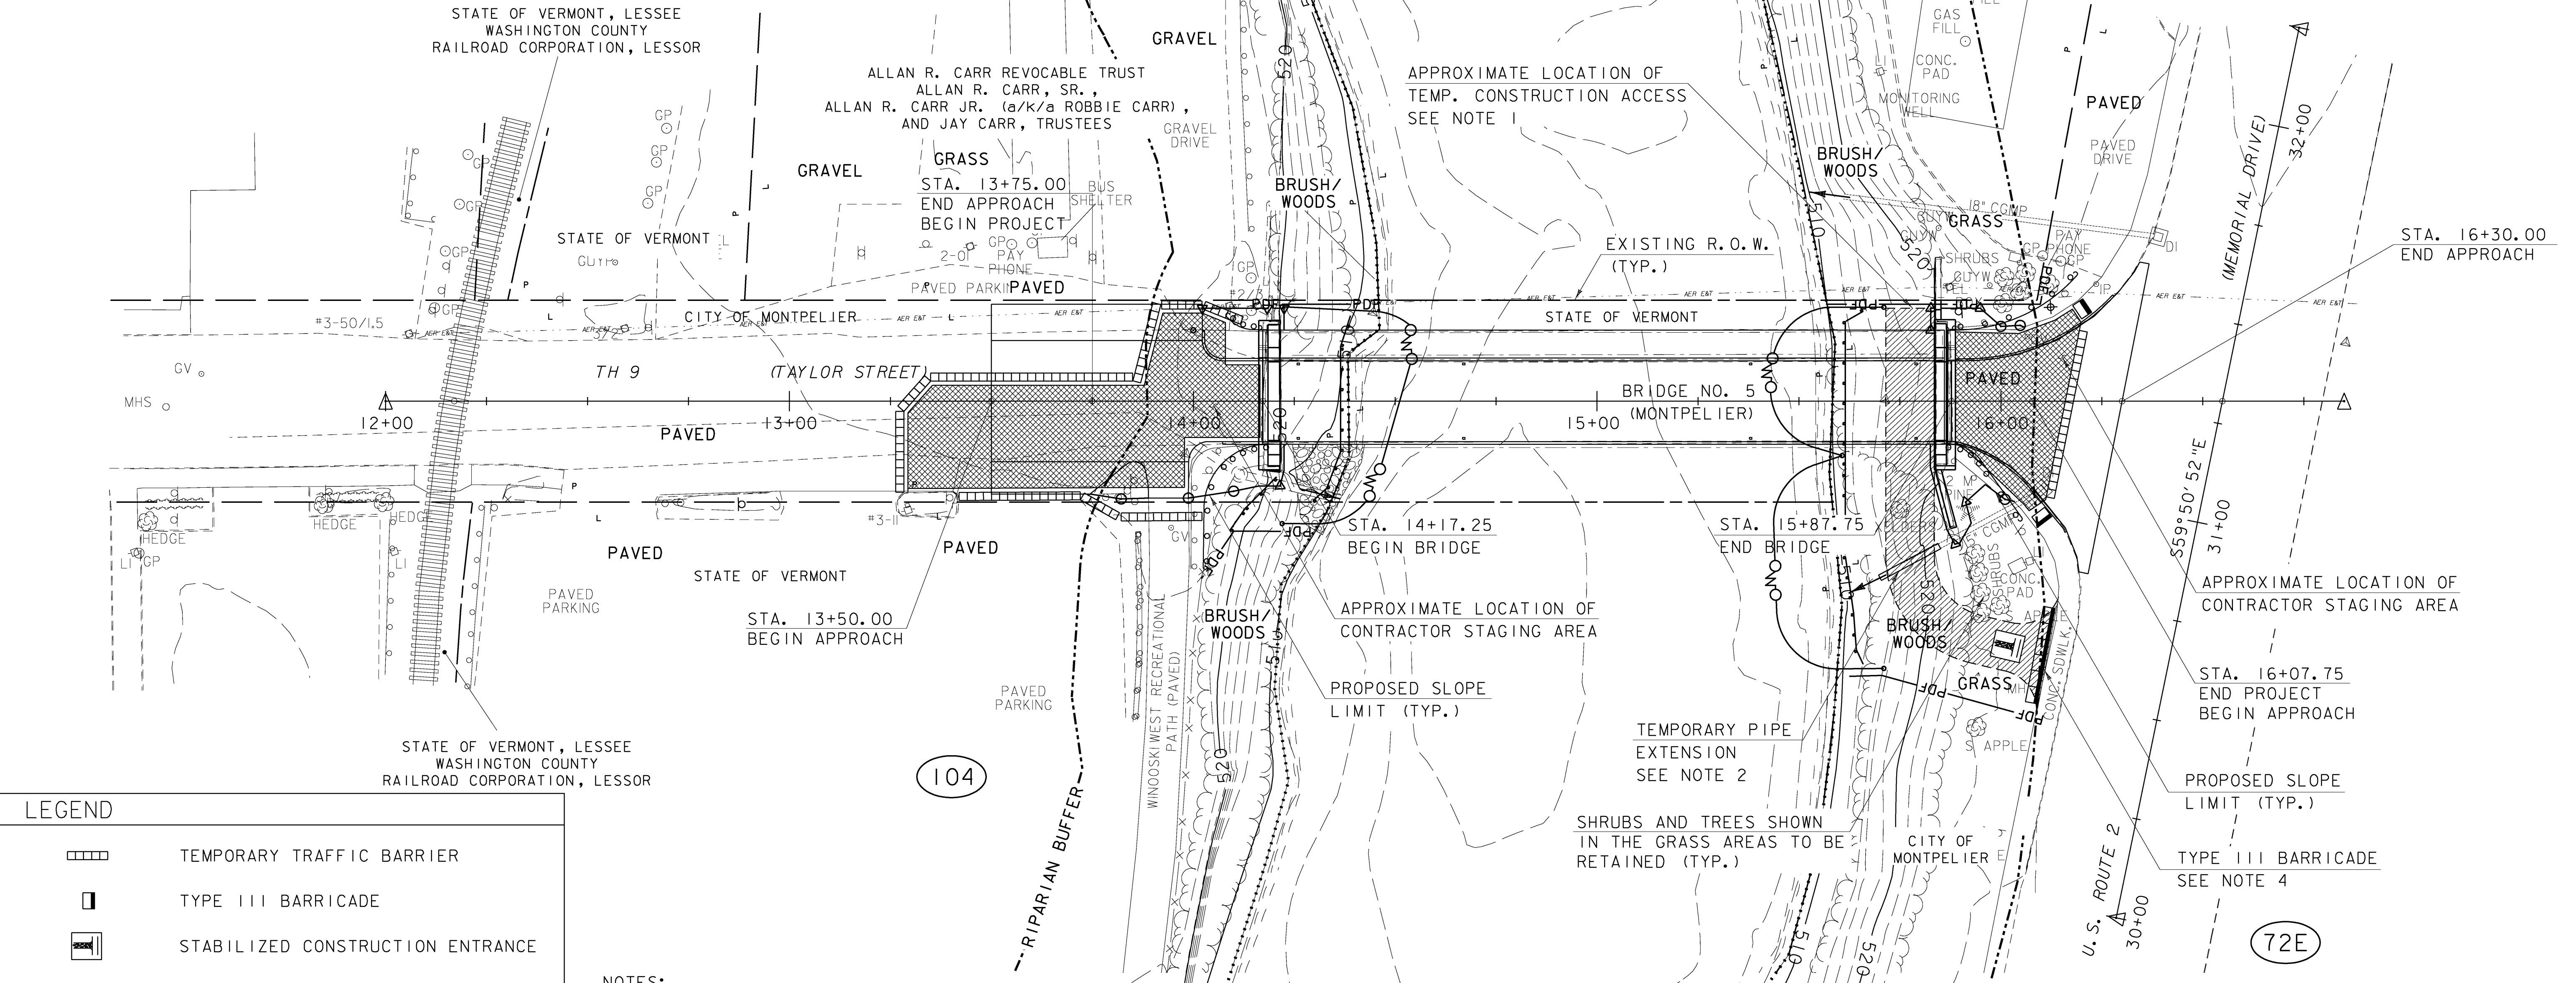

LEGEND	
	TEMPORARY TRAFFIC BARRIER
	TYPE III BARRICADE
	STABILIZED CONSTRUCTION ENTRANCE
	SILT FENCE
	TURBIDITY CURTAIN
	PROJECT DEMARCATION FENCE
	STABILIZED CONSTRUCTION ENTRANCE/TEMPORARY CONSTRUCTION ACCESS
	CONTRACTOR STAGING AREA (APPROX.)
	SOIL MAP UNIT TYPE (SEE SHT. 18 FOR DETAIL)
	SOIL MAP UNIT BOUNDARY
	RIPARIAN BUFFER

NOTES:

- THE CONTRACTOR SHALL TAKE CARE TO MINIMIZE DISTURBANCE OF THE EXISTING RIVER BANK RESULTING FROM THE BRUSH AND TREE CLEARING, EXCAVATING, AND GRADING THAT IS REQUIRED TO GAIN ACCESS AND STAGE CONSTRUCTION OPERATIONS BELOW THE BRIDGE. COSTS FOR REQUIRED CLEARING AND GRUBBING SHALL BE INCIDENTAL TO ALL OTHER CONTRACT ITEMS. ANY TEMPORARY EARTH SLOPES THAT ARE CONSTRUCTED TO ACCOMMODATE ACCESS SHALL BE STABILIZED WITH SEED AND TEMPORARY EROSION MATTING IN ACCORDANCE WITH THE EROSION CONTROL PLAN AND AS DIRECTED BY THE ON-SITE PLAN COORDINATOR.
- THE CONTRACTOR SHALL AVOID OR MINIMIZE DISTURBANCE OF THE EXISTING 15" OUTLET PIPE DURING OPERATIONS TO GAIN ACCESS BELOW THE BRIDGE. A TEMPORARY PIPE EXTENSION WITH 2' MINIMUM COVER SHALL BE PROVIDED TO MAINTAIN STORMWATER OUTLET FLOW AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT FOR THE TEMPORARY PIPE EXTENSION SHALL BE INCIDENTAL TO ITEM 653.35 VEHICLE TRACKING PAD.
- TEMPORARY TRAFFIC BARRIER SHALL BE INSTALLED AROUND THE PROJECT SITE TO PROVIDE FOR TRAFFIC CONTROL. PAYMENT SHALL BE MADE UNDER ITEM 621.90. REMOVING AND REINSTALLING TEMPORARY TRAFFIC BARRIER AS NECESSARY FOR THE CONTRACTOR TO GAIN ACCESS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCIDENTAL TO ITEM 621.90.
- TYPE III BARRICADES SHALL BE PLACED ACROSS THE TEMPORARY CONSTRUCTION ACCESS TO DISCOURAGE PEDESTRIAN ACCESS FROM THE SIDEWALK WHEN THE CONSTRUCTION ACCESS IS NOT ACTIVELY BEING UTILIZED BY THE CONTRACTOR. THE CONTRACTOR SHALL PROVIDE A FLAGGER AT THIS LOCATION WHEN ACTIVELY MOVING EQUIPMENT INTO AND OUT OF THE CONSTRUCTION ACCESS.



EPSC CONSTRUCTION SITE PLAN	
PROJECT NAME:	MONTPELIER
PROJECT NUMBER:	BHF 6400(31)
FILE NAME:	\$FILES\$
PROJECT MANAGER:	SUSAN SCRIBNER
DESIGNED BY:	D. D'AMATO
BRIDGE DESIGN SUPERVISOR:	P. HALSTEAD
PLOT DATE:	10/12/2009
DRAWN BY:	D. D'AMATO
CHECKED BY:	P. PERKINS
SHEET	23 OF 63

FILE NAME: h:\14596\montpelier\plan\14596_esp02.dgn
 DATE/TIME: 10/12/2009 11:58:22
 USER: pperkins