

SNOW FENCE

STA 2+465.000 TO STA 2+530.900 LT
 STA 2+625.400 TO STA 2+647.000 LT
 STA 2+448.500 TO STA 2+478.200 RT
 STA 2+481.200 TO STA 2+504.800 RT
 STA 2+625.400 TO STA 2+659.000 RT

PERMANENT SEDIMENT TRAP

STA 2+538.000 TO STA 2+542.000 LT
 STA 2+658.000 TO STA 2+662.000 LT
 STA 2+658.000 TO STA 2+662.000 RT

SILT FENCE


STA 2+465.600 TO STA 2+530.900 LT
 STA 2+616.600 TO STA 2+648.600 LT
 STA 2+616.600 TO STA 2+648.600 LT
 STA 2+448.700 TO STA 2+480.000 RT
 STA 2+482.000 TO STA 2+504.700 RT
 STA 2+618.600 TO STA 2+649.800 RT
 STA 2+618.600 TO STA 2+649.800 RT

ROCK CHECK DAM

STA 2+387 RT
 STA 2+386 LT
 STA 2+395 LT
 STA 2+398 RT
 STA 2+404 RT
 STA 2+404 LT
 STA 2+409 RT
 STA 2+413 LT
 STA 2+422 LT
 STA 2+428 LT
 STA 2+434 LT
 STA 2+440 LT
 STA 2+447 LT
 STA 2+453 LT
 STA 2+460 LT
 STA 2+533 RT
 STA 2+540 RT
 STA 2+589 RT

EROSION MATTING

STA 2+560.000 TO STA 2+585.000 LT
 STA 2+571.000 TO STA 2+585.000 RT
 STA 2+710.000 TO STA 2+730.000 LT

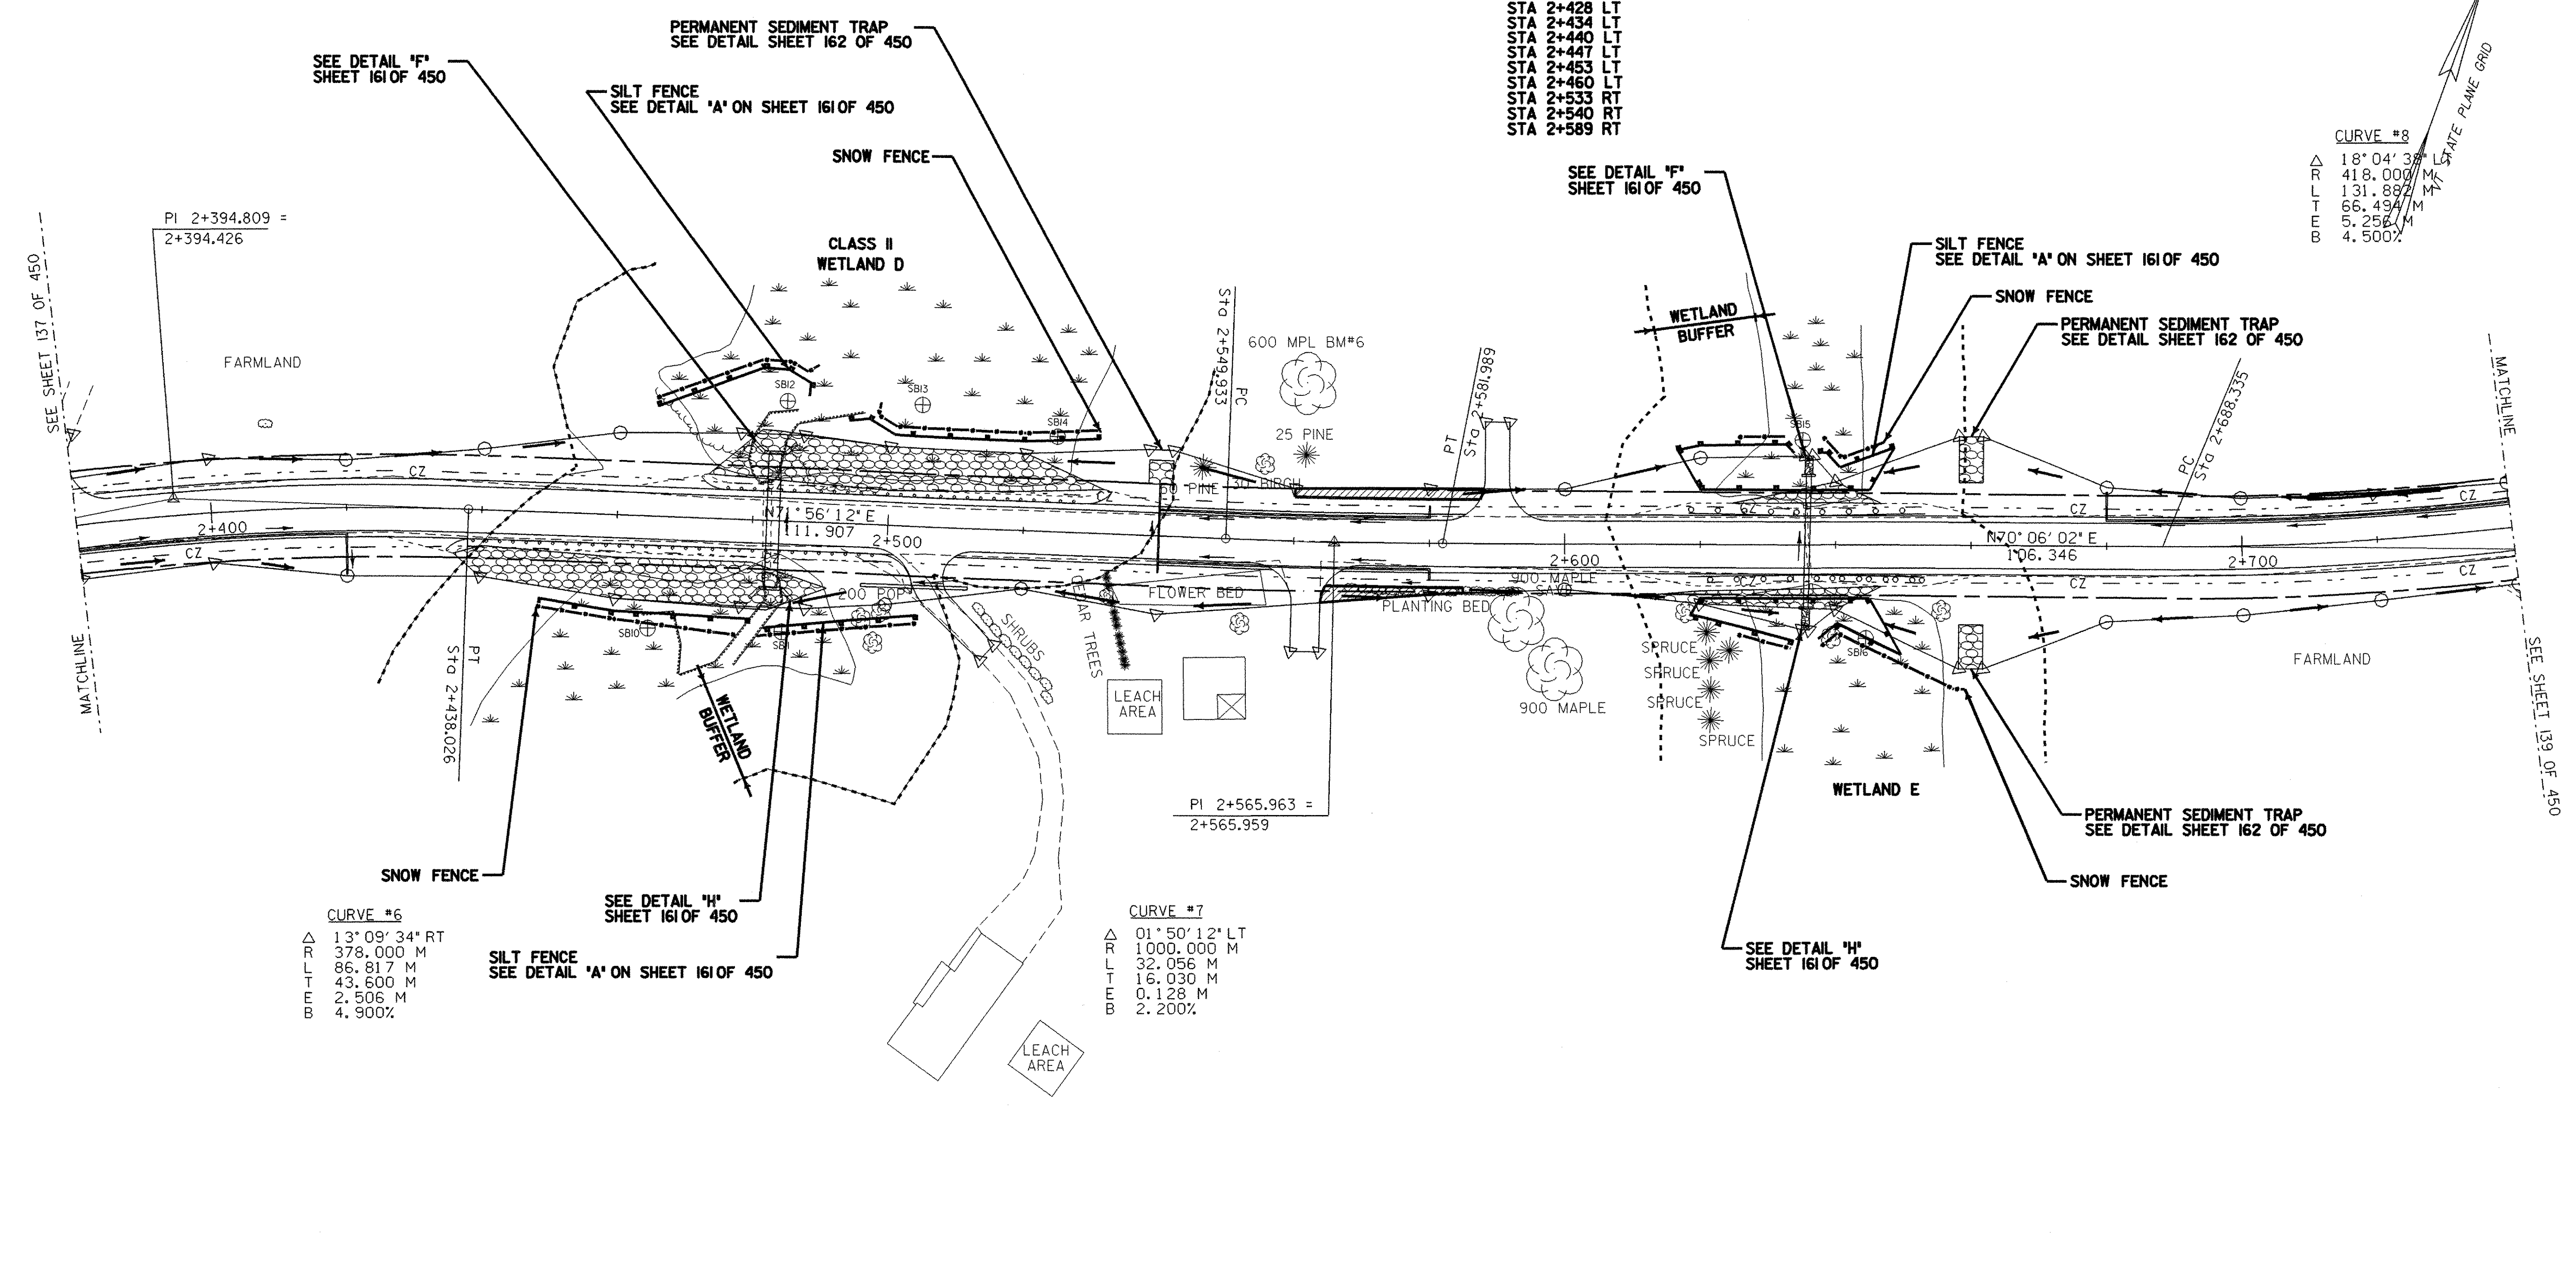

EROSION CONTROL PLAN




LEGEND

- SILT FENCE
- SNOW FENCE
- DIRECTION OF DITCH FLOW
- PROJECT DEMARCATION FENCE
- WETLAND BUFFER
- STABILIZED CONSTRUCTION ENTRANCE
- EROSION MATTING

NOTES:

1. CONSTRUCTION SHALL TAKE PLACE BETWEEN MAY 1 AND OCTOBER 15. CONSTRUCTION IN A WATERCOURSE CHANNEL SHALL TAKE PLACE BETWEEN JUNE 1 AND OCTOBER 1. THE CONTRACTOR SHALL SUBMIT ANY CHANGES TO THIS SCHEDULE TO THE RESIDENT ENGINEER FOR APPROVAL AT OR BEFORE THE PRE-CONSTRUCTION MEETING.
2. THE LIMIT OF DISTURBANCE FOR THIS PROJECT SHALL BE THE LIMIT OF RIGHT-OF-WAY AS SHOWN ON THE EASEMENTS RIGHT-OF-WAY PLANS, UNLESS OTHERWISE SPECIFIED IN THE PLANS. CONSTRUCTION FENCE SHALL BE USED TO DELINEATE THE LIMIT OF DISTURBANCE IN AND AROUND WATERCOURSES AND WETLANDS. THE CONTRACTOR SHALL NOT IMPACT AREAS OUTSIDE THE LIMIT OF DISTURBANCE.
3. SEE THE EROSION CONTROL DETAIL SHEET FOR SEEDING FORMULAS AND ROCK CHECK DAM DETAIL.
4. CONTRACTOR TO STABILIZE ANY TEMPORARY CHANNELS AND DITCHES WITH STONE.
5. SILT FENCE LOCATIONS ARE APPROXIMATE ONLY. SILT FENCE TO BE INSTALLED ALONG THE CONTOURS.
6. MULCH SHALL BE APPLIED TO EXPOSED SOIL AT THE END OF EACH WORK DAY. SEED AND MULCH SHALL BE APPLIED TO SOIL WITHIN 48 HOURS OF FINAL DISTURBANCE. SEED AND MULCH SHALL ALSO BE APPLIED TO ANY TOPSOIL STOCKPILES. SEE APPLICATION RATES ON SHEET 3 OF 450.



PROJECT NAME:	HIGHGATE - FRANKLIN
PROJECT NUMBER:	STP RS 030(I) SA
FILE NAME:	...85c060/design/dc060ero.dgn
PLOT DATE:	09-MAY-2005
PROJECT LEADER:	DELLASANTA
DRAWN BY:	SQUAD B
DESIGNED BY:	SQUAD B
CHECKED BY:	SQUAD B
IPARM FILE NAME:	dc060er5.1
SHEET	138 OF 450